



# **LEAN SIGMA EXPERTS**

---

# **AUSTRALIA**



Lean Six Sigma Yellow Belt Training  
Featuring Examples from Minitab 17



# 1.0 Define Phase



# 1.1 Overview of Six Sigma



# Yellow Belt Training: Define Phase

---

## 1.1 Six Sigma Overview

- 1.1.1 What is Six Sigma
- 1.1.2 Six Sigma History
- 1.1.3 Six Sigma Approach  $Y = f(x)$
- 1.1.4 Six Sigma Methodology
- 1.1.5 Roles and Responsibilities

## 1.2 Six Sigma Fundamentals

- 1.2.1 Defining a Process
- 1.2.2 VOC and CTQs
- 1.2.3 QFD
- 1.2.4 Cost of Poor Quality (COPQ)
- 1.2.5 Pareto Analysis (80 : 20 rule)

## 1.3 Lean Six Sigma Projects

- 1.3.1 Six Sigma Metrics
- 1.3.2 Business Case and Charter
- 1.3.3 Project Team Selection
- 1.3.4 Project Risk Management
- 1.3.5 Project Planning

## 1.4 Lean Fundamentals


- 1.4.1 Lean and Six Sigma
- 1.4.2 History of Lean
- 1.4.3 The Seven Deadly Muda
- 1.4.4 Five-S (5S)

# 1.1.1 What is Six Sigma




# What is Six Sigma?

- What is “sigma”?
  - In statistics, **sigma** ( $\sigma$ ) refers to “standard deviation,” which is a measure of variation.
  - You will come to learn that variation is the enemy of any quality process. We need to understand, manage, and minimize process variation.
- What is “Six Sigma”?
  - **Six Sigma** is an aspiration or goal of process performance.
  - A Six Sigma “goal” is for a process average to operate approximately  $6\sigma$  away from customer’s high and low specification limits.

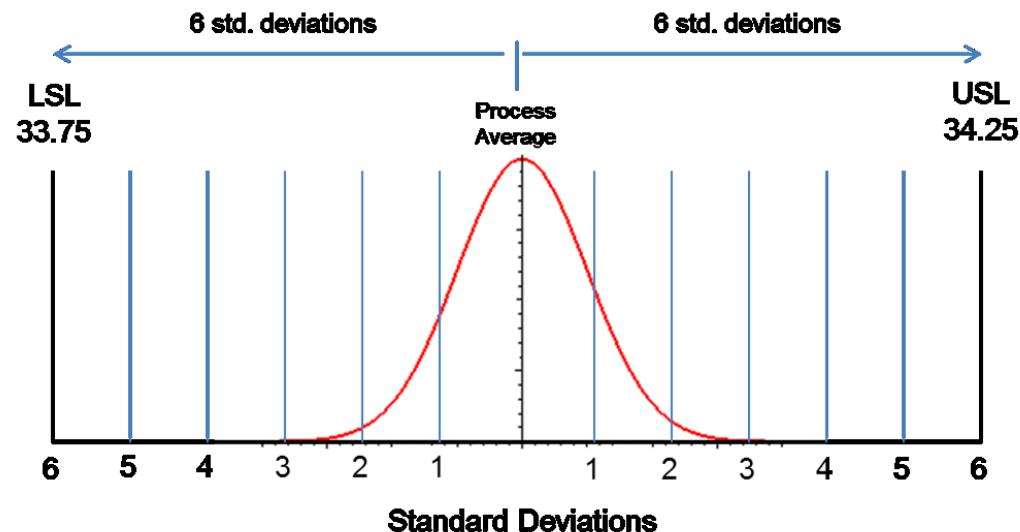


# What is Six Sigma?

- A process whose average is about  $6\sigma$  away from the customer's high and low specification limits has abundant room to “float” before approaching the customer's specification limits.
- A Six Sigma process only yields 3.4 defects for every million opportunities! In other words, 99.9997% of the products are defect-free!

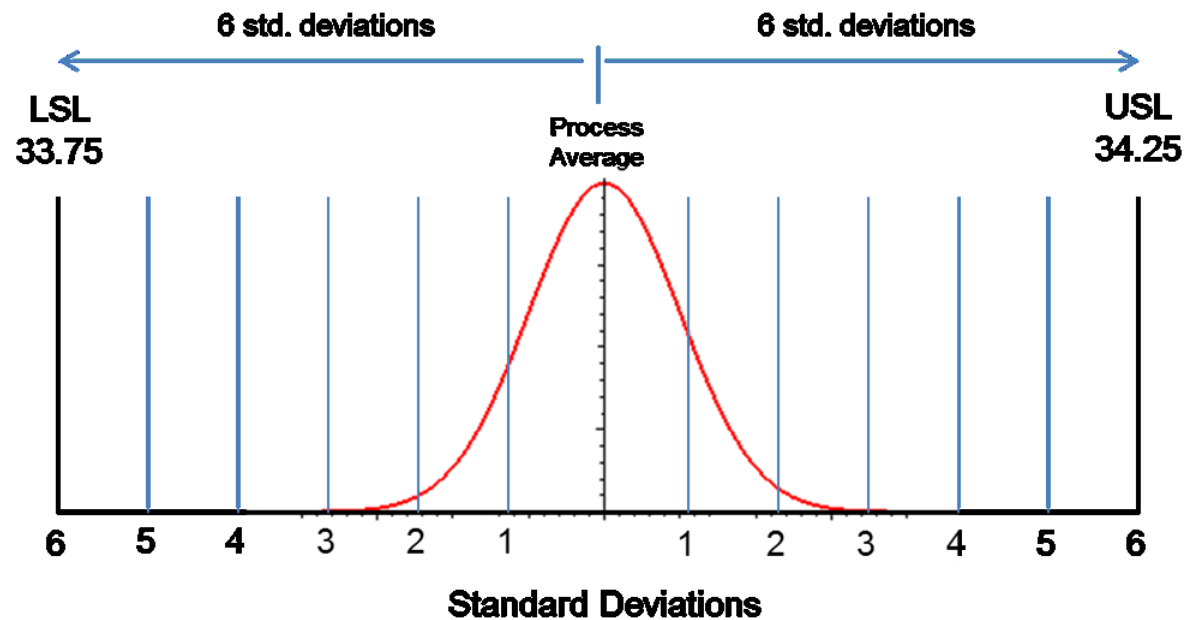

# What is Six Sigma: Sigma Level

- **Sigma level** measures how many “sigma” there are between your process average and the nearest customer specification.
- Let us assume that your customers upper and lower specifications limits (USL & LSL) were narrower than the width of your process spread.
- The USL & LSL below stay about 1 standard deviation away from the process average. Therefore, this process operates at **1 sigma**.

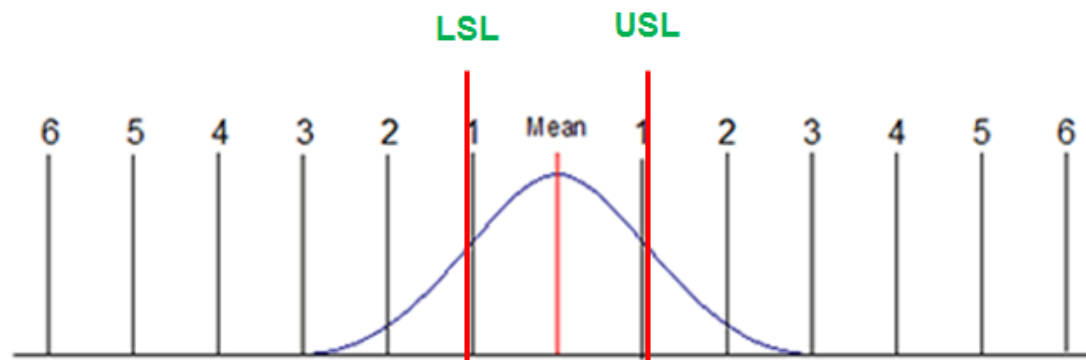



# What is Six Sigma: Sigma Level

---

- A process operating at 1 sigma has a defect rate of approximately 70%.



- This means that the process will generate defect-free products only 30% of the time.

- What about processes with more than 1 sigma level?
- A higher sigma level means a lower defect rate.
- Let us take a look at the defect rates of processes at different sigma levels.

# What is Six Sigma: Sigma Level

- This table shows each sigma level's corresponding defect rate and DPMO (defects per million opportunities).
- The higher the sigma level, the lower the defective rate and DPMO.

Sigma Level	Defect Rate	DPMO
1	69.76%	697612
2	30.87%	308770
3	6.68%	66810
4	0.62%	6209
5	0.023%	232
6	0.00034%	3.4

These Defect Rates Assume a 1.5 sigma shift

- How does this translate into things you might easily relate to?



# What is Six Sigma: Sigma Level

---

- Let us take a look at processes operating at 3 sigma.
- 3 sigma processes have a defect rate of approximately 7%. What would happen if processes operated at 3 sigma?
  - Virtually no modern computer would function\*.
  - 10,800,000 health care claims would be mishandled each year.
  - 18,900 US savings bonds would be lost every month.
  - 54,000 checks would be lost each night by a single large bank.
  - 4,050 invoices would be sent out incorrectly each month by a modest-sized telecommunications company.
  - 540,000 erroneous call details would be recorded each day from a regional telecommunications company.
  - 270 million erroneous credit card transactions would be recorded each year in the United States.

(\*<http://www.qualityamerica.com>)



# What is Six Sigma: Sigma Level

---

- What if processes operated with 1% defect rate?
  - 20,000 lost articles of mail per hour\*.
  - Unsafe drinking water almost 15 minutes per day.
  - 5,000 incorrect surgical operations per week.
  - Short or long landings at most major airports each day.
  - 200,000 wrong drug prescriptions each year.
  - No electricity for almost 7 hours per month.
- Even at 1% defect rate, some processes would be unacceptable to you and many others.
- **So what is Six Sigma?**
  - Sigma level is the measure!
  - Six is the goal!



(\* Implementing Six Sigma – Forest W. Breyfogle III)

# What is Six Sigma: The Methodology

---

- Six Sigma itself is the **goal**, not the method.
- In order to achieve Six Sigma, you need to improve your process performance by:
  - Minimizing the process variation so that your process has enough room to fluctuate within customer's spec limits
  - Shifting your process average so that it is centered between your customer's spec limits.
- Accomplishing these two process improvements (*along with stabilization and control*), you can achieve Six Sigma.
- DMAIC is the systematic methodology prescribed to achieve Six Sigma.



# What is Six Sigma: The Methodology

---

- DMAIC is a systematic and rigorous methodology that can be applied to any process in order to achieve Six Sigma.
- It consists of 5 phases of a project:
  - **D**efine
  - **M**easure
  - **A**nalyze
  - **I**mprove
  - **C**ontrol.
- You will be heavily exposed to many concepts, tools, and examples of the DMAIC methodology through this training.
- You will be capable of applying the DMAIC methodology to improve the performance of any process at the completion of the curriculum.




# 1.1.2 Six Sigma History



# Six Sigma History

## Lean Six Sigma *History & Timeline*

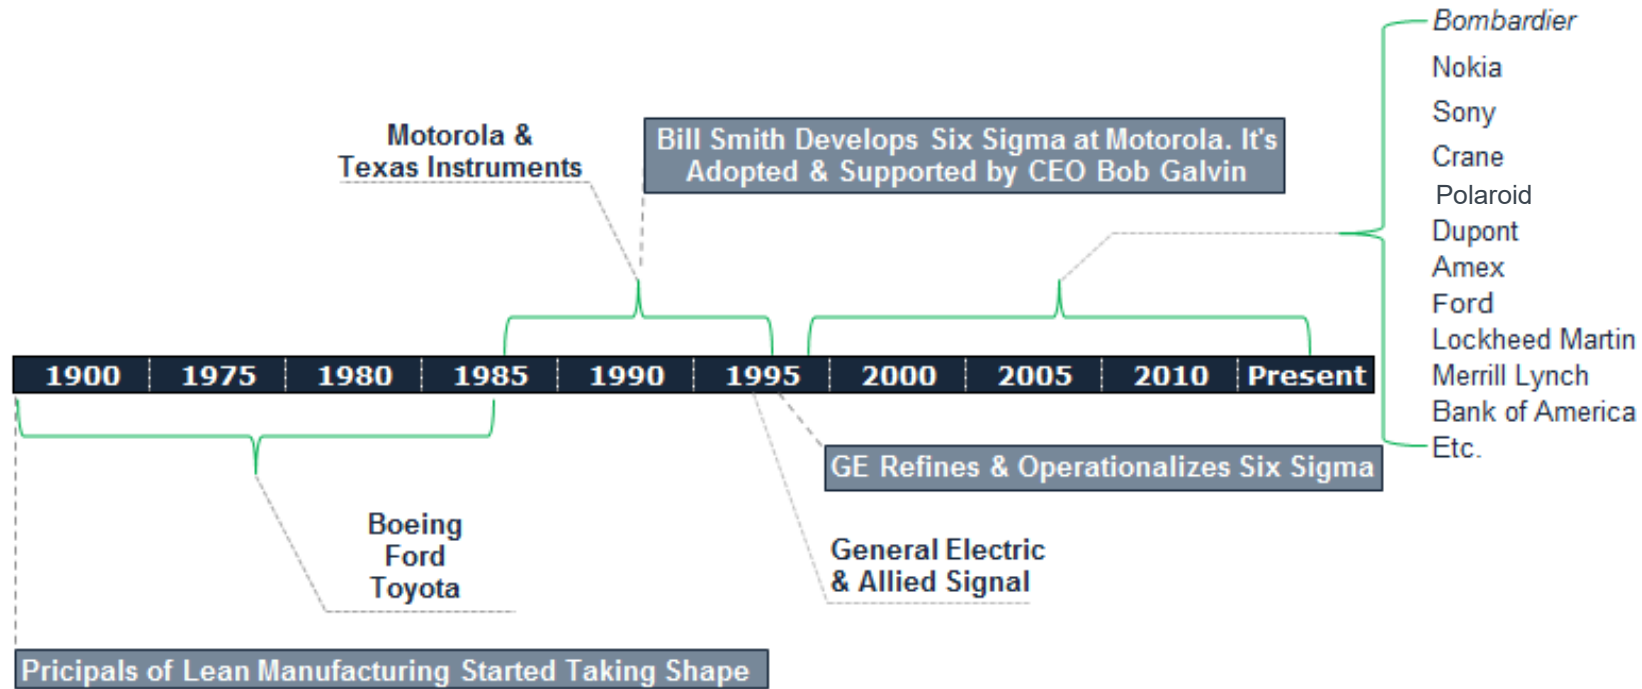



# Six Sigma History

---

- The “Six Sigma” terminology was originally adopted by Bill Smith at Motorola in the late 1980s as a quality management methodology.
- As the “Father of Six Sigma,” Bill forged the path for Six Sigma through Motorola’s CEO Bob Galvin who strongly supported Bill’s passion and efforts.
- Starting from the late 1980s, Motorola extensively applied Six Sigma as a process management discipline throughout the company, leveraging Motorola University.
- In 1988, Motorola was recognized with the prestigious Malcolm Baldrige National Quality Award for its achievements in quality improvement.



# Six Sigma History

---

- Six Sigma has been widely adopted by companies as an efficient way of improving the business performance since General Electric implemented the methodology under the leadership of Jack Welch in the 1990s.
- As GE connected Six Sigma results to its executive compensation and published the financial benefits of Six Sigma implementation in their annual report, Six Sigma became a highly sought-after discipline of quality.

# Six Sigma History


---

- Most Six Sigma programs cover the aspects, tools, and topics of Lean or Lean Manufacturing.
- The two work hand in hand, benefitting each other.
  - Six Sigma focuses on minimizing process variability, shifting the process average, and delivering within customer's specification limits.
  - Lean focuses on eliminating waste and increasing efficiency.
- Lean and its popularity began to form and gain significant traction in the mid 1960s with the Toyota initiative "TPS" or Toyota Production System.
- The concepts and methodology of Lean, however, were fundamentally applied much earlier by both Ford and Boeing in the early 1900s.



# Six Sigma History

- Despite the criticism and immaturity of Six Sigma in many aspects, its history continues to be written with every company and organization striving to improve its business performance.

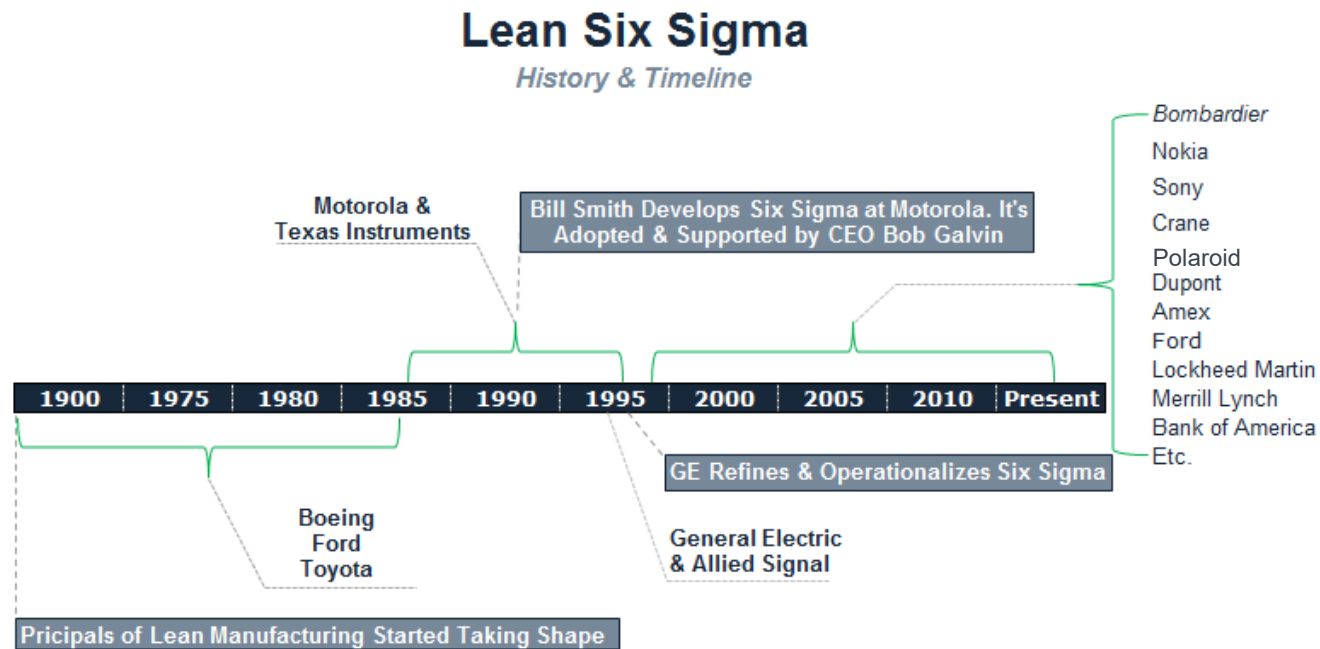

# 1.1.3 Six Sigma Approach



# Six Sigma Approach: $Y = f(x)$

---

- The Six Sigma approach to problem solving uses a transfer function.
- A **transfer function** is a mathematical expression of the relationship between the inputs and outputs of a system.
- **$Y = f(x)$**  is the relational transfer function that is used by all Six Sigma practitioners.
- It is absolutely critical that you understand and embrace this concept.



# Six Sigma Approach: $Y = f(x)$

---

- “Y” refers to the measure or output of a process.
  - Y is usually your primary metric
  - Y is the measure of process performance that you are trying to improve.
- $f(x)$  means “function of x.”
  - x’s are factors or inputs that affect the Y
- Combined, the  $Y = f(x)$  statement reads “Y is a function of x.”
- In simple terms: “My process performance is dependent on certain x’s.”
- The objective in a Six Sigma project is to identify the critical x’s that have the most influence on the output (Y) and adjust them so that the Y improves.


# Six Sigma Approach: $Y = f(x)$

---

- Let us look at a simple example of a pizza delivery company that desires to meet customer expectations of on-time delivery.
  - Measure = on-time pizza deliveries
    - $Y$  = percent of on-time deliveries
  - $f(x)$  would be the  $x$ 's or factors that heavily influence timely deliveries
    - $x_1$ : might be traffic
    - $x_2$ : might be the number of deliveries per driver dispatch
    - $x_3$ : might be the accuracy of directions provided to the driver
    - $x_4$ : might be the reliability of the delivery vehicle
    - etc.
- The statement  $Y = f(x)$  in this example will refer to the proven  $x$ 's determined through the steps of a Six Sigma project.



# Six Sigma Approach: $Y = f(x)$

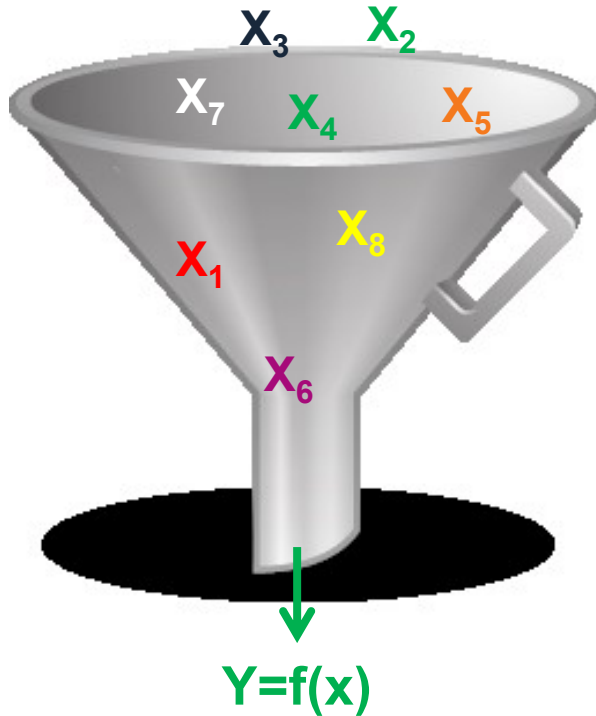

- With this approach, all potential x's are evaluated throughout the DMAIC methodology.
- The x's should be narrowed down until the vital few x's that significantly influence “on-time pizza deliveries” are identified!

# Six Sigma Approach: $Y = f(x)$

---

- This approach to problem solving will take you through the process of determining all potential x's that **might** influence on-time deliveries and then determining through measurements and analysis which x's **do** influence on-time deliveries.
- Those significant x's become the ones used in the  $Y = f(x)$  equation.
- The  $Y = f(x)$  equation is a very powerful concept and requires the ability to measure your output and quantify your inputs.
- Measuring process inputs and outputs is crucial to effectively determining the significant influences to any process.



# 1.1.4 Six Sigma Methodology




# Six Sigma Methodology

---

- Six Sigma follows a methodology that is conceptually rooted in the principles of a five-phase project.
- Each phase has a specific purpose and specific tools and techniques that aid in achieving the phase objectives.
- The 5 phases of DMAIC:
  1. **Define**
  2. **Measure**
  3. **Analyze**
  4. **Improve**
  5. **Control**

# Six Sigma Methodology

---

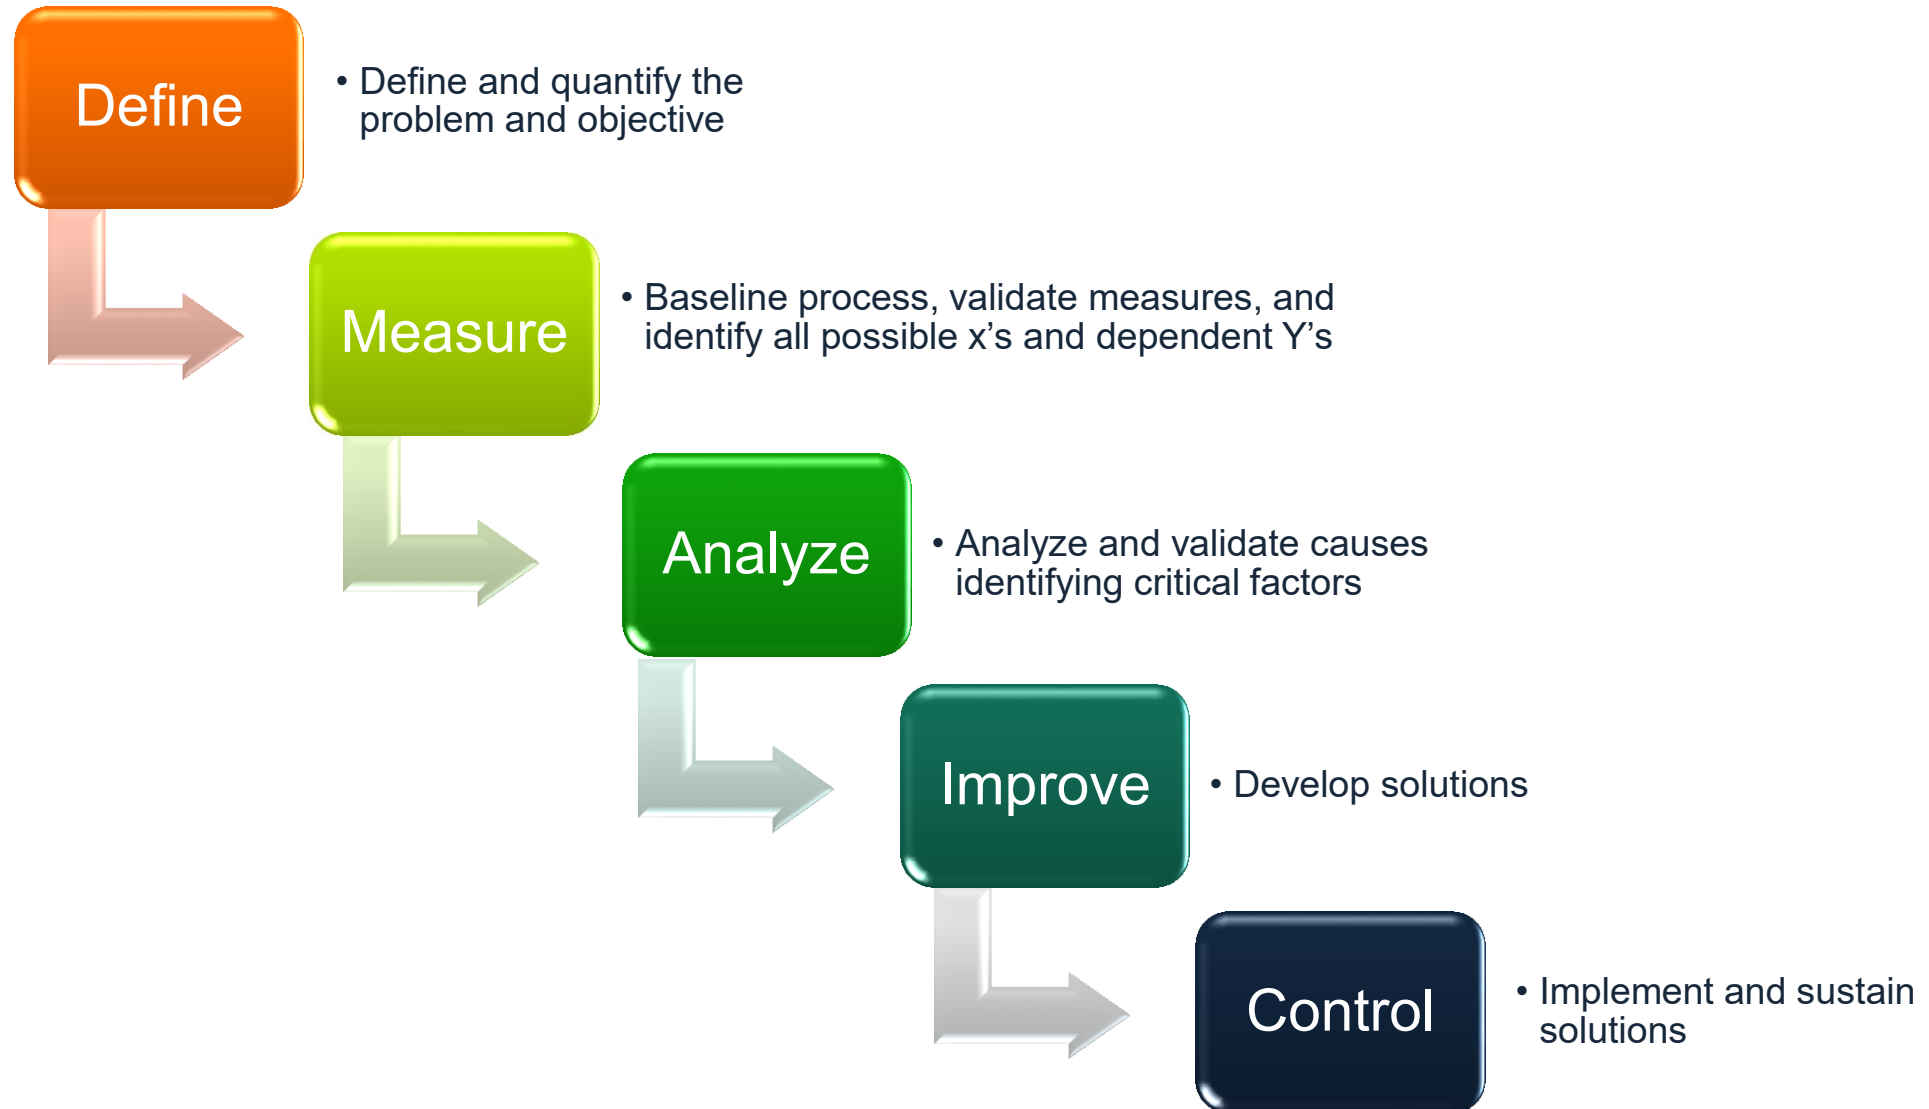

# Six Sigma Methodology: Define Phase

---

- The goal of the **Define** phase is to establish a solid foundation and business case for a Six Sigma project.
- Define is arguably the most important aspect of any Six Sigma project.
- All successful projects start with a current state challenge or problem that can be articulated in a quantifiable manner.
  - It is not enough to just know the problem, you must quantify it and also determine the goal.
- Once problems and goals are identified and quantified, the rest of the define phase will be about valuation, team, scope, project planning, timeline, stakeholders, Voice Of the Customer (VOC), and Voice Of the Business (VOB).



# Six Sigma Methodology: Define Phase

---

- **Define Phase Tools and Deliverables**

- Project Charter – Establish the:
  - Business Case
  - Problem Statement
  - Project Objective
  - Project Scope
  - Project Timeline
  - Project Team.
- Stakeholder Assessment
- High-Level Pareto Chart Analysis
- High-Level Process Map
- VOC/VOB and CTQs Identified and Defined
- Financial Assessment



# Six Sigma Methodology: Measure Phase

---

- The goal of the **Measure** phase is to gather baseline information about the process (process performance, inputs, measurements, customer expectations etc.).
- Throughout the Measure phase you will seek to achieve a few important objectives:
  - Gather All Possible x's
  - Assess Measurement System and Data Collection Requirements
  - Validate Assumptions
  - Validate Improvement Goals
  - Determine COPQ (Cost of Poor Quality)
  - Refine Process Understanding
  - Determine Process Stability
  - Determine Process Capability.





# Six Sigma Methodology: Measure Phase

---

- **Measure Phase Tools and Deliverables**

- Process Maps, SIPOC, Value Stream Maps
- Failure Modes and Effects Analysis (FMEA)
- Cause-and-Effect Diagram
- XY Matrix
- Six Sigma Statistics
  - Basic Statistics
  - Descriptive Statistics
- Measurement Systems Analysis
  - Variable and/or Attribute Gage R&R
  - Gage Linearity and Accuracy or Stability
- Basic Control Charts
- Process Capability (Cpk, Ppk) and Sigma Levels

Data Collection Plan



# Six Sigma Methodology: Analyze Phase

---

- The **Analyze** phase is all about establishing verified drivers.
- In the DMAIC methodology, the Analyze phase uses statistics and higher-order analytics to discover relationships between process performance and process inputs (in other words, what are the root causes or drivers of the improvement effort).
- Ultimately, the Analyze phase establishes a reliable hypothesis for improvement solutions.
  - Establish the Transfer Function  $Y = f(x)$
  - Validate the List of Critical x's and Impacts
  - Create a Beta Improvement Plan (e.g., pilot plan).

# Six Sigma Methodology: Analyze Phase

---

- **Analyze Phase Tools and Deliverables**

- The Analyze phase is about proving and validating critical x's using the appropriate and necessary analysis techniques. Examples include:
  - Hypothesis Testing
    - Parametric and Non-Parametric
  - Regression
    - Simple Linear Regression
    - Multiple Linear Regression
- The Analyze phase is also about establishing a set of solution hypotheses to be tested and further validated in the Improve phase.



# Six Sigma Methodology: Improve Phase

---

- The goal of the **Improve** phase is. . .you guessed it! "make the improvement." Improve is about designing, testing, and implementing your solution.
- To this point you have defined the problem and objective of the project, brainstormed possible x's, analyzed and verified critical x's. Now it's time to make it real!
  - Statistically Proven Results from Active Study/Pilot
  - Improvement/Implementation Plan
  - Updated Stakeholder Assessment
  - Revised Business Case with Return on Investment (ROI)
  - Risk Assessment/Updated FMEA
  - New Process Capability and Sigma.



# Six Sigma Methodology: Improve Phase

---

- **Improve Phase Tools and Deliverables**
  - Any Appropriate Tool from Previous Phases
  - Design of Experiment (DOE)
    - Full Factorial
    - Fractional Factorial
  - Pilot or Planned Study Using:
    - Hypothesis Testing
    - Valid Measurement Systems
  - Implementation Plan



# Six Sigma Methodology: Control Phase

---

- The last of the 5 core phases of the DMAIC methodology is the **Control** phase.
- The goal of the Control phase is to establish automated and managed mechanisms to maintain and sustain your improvement.
- A successful control plan also establishes a reaction and mitigation plan as well as an accountability structure.



# Six Sigma Methodology: Control Phase


---

- **Control Phase Tools and Deliverables**
  - Statistical Process Control (SPC/Control Charts)
    - IMR, XbarS, XbarR, P, NP, U, C etc.
  - Control Plan Documents
    - Control Plan
    - Training Plan
    - Communication Plan
    - Audit Checklist
  - Lean Control Methods
    - Poka-Yoke
    - Five-S
    - Kanban



# Six Sigma Methodology

## Six Sigma DMAIC Roadmap

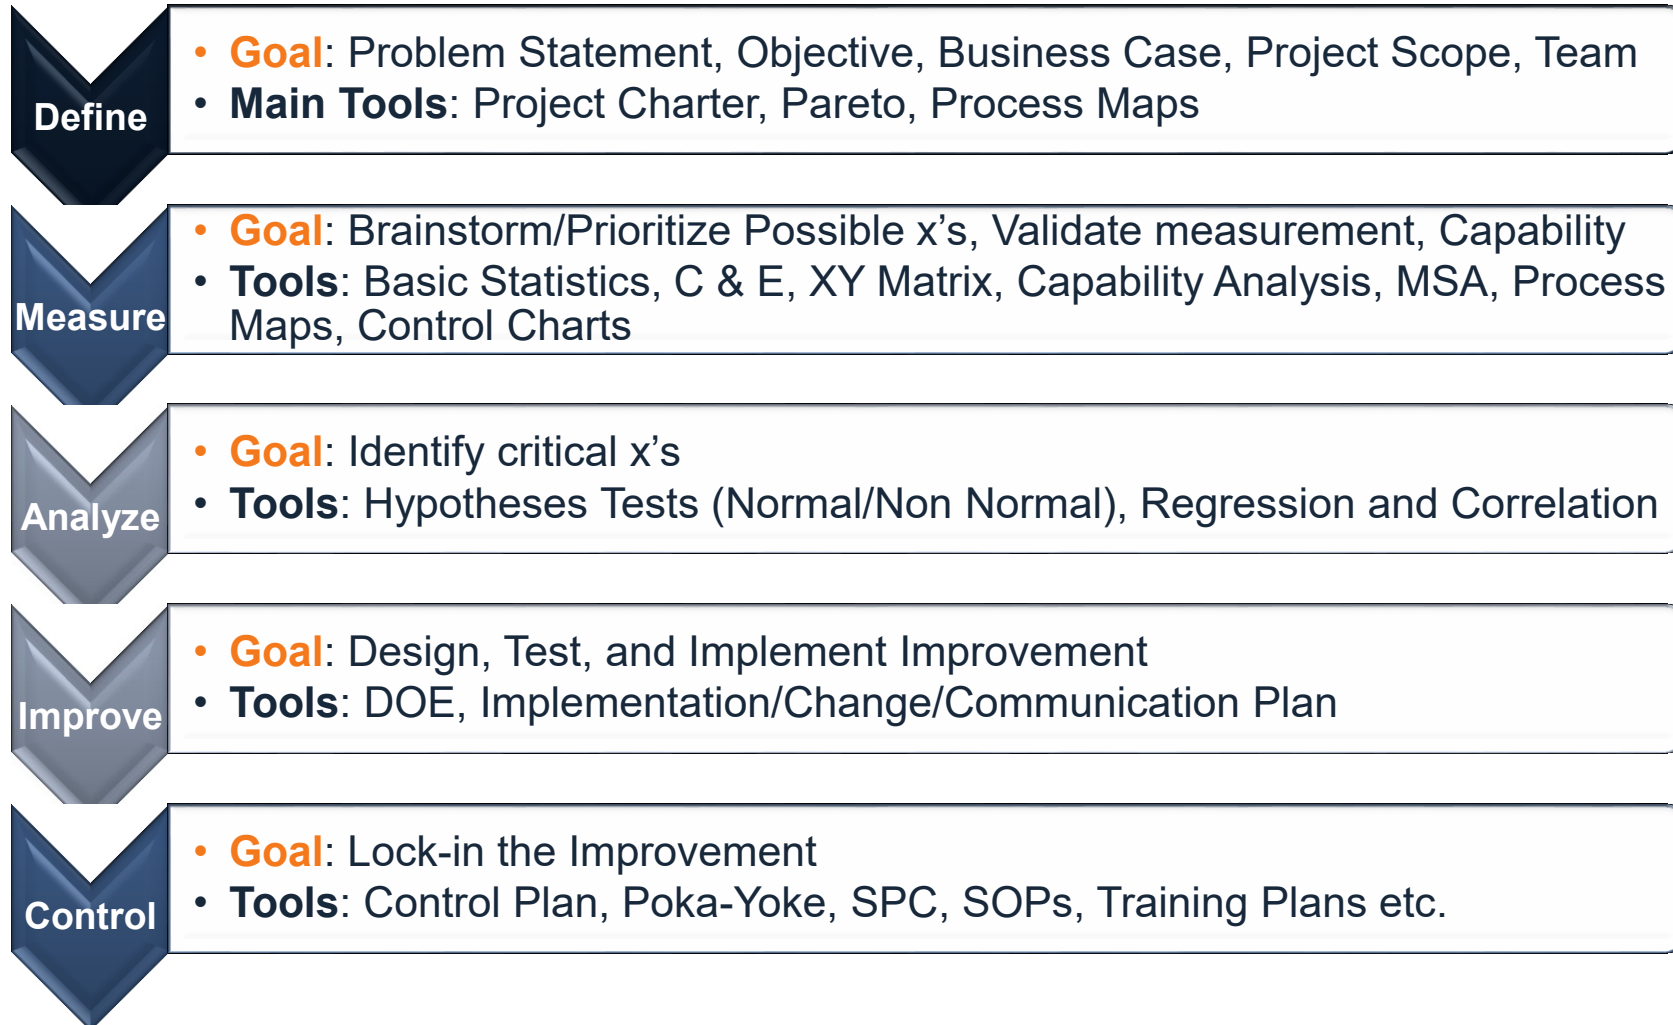



# 1.1.5 Roles and Responsibilities



# Roles and Responsibilities


---

- The various roles in a Six Sigma program are commonly referred to as “Belts.”
- In addition to Belts, there are also other key roles with specific responsibilities.
- Let us explore the different roles and their corresponding responsibilities in a Six Sigma program.



# Roles and Responsibilities

- Each of the four Six Sigma belts represents a different level of expertise in the field of Six Sigma.
  - Six Sigma Master Black Belt (MBB)
  - Six Sigma Black Belt (BB)
  - Six Sigma Green Belt (GB)
  - Six Sigma Yellow Belt (YB)
- In addition to Belts, there are other critical and complementary roles:
  - Champions
  - Sponsors
  - Stakeholders
  - Subject Matter Experts (SMEs).

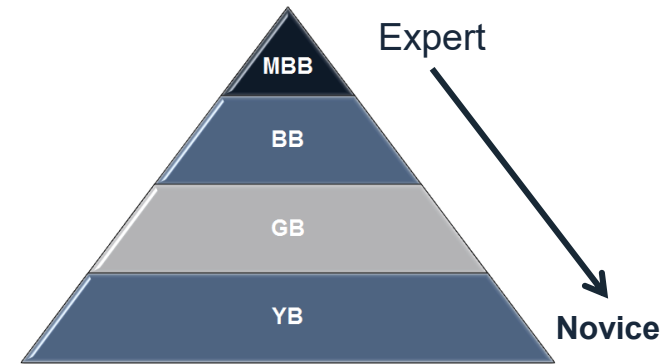

# Roles and Responsibilities: MBB

---

- The **Master Black Belt** (MBB) is the most experienced, educated, and capable Six Sigma expert.
- A typical MBB has managed dozens of Black Belt level projects.
- The MBB can simultaneously lead multiple Six Sigma Belt projects while mentoring and certifying Black Belt and Green Belt candidates.
- The MBB typically works with high-level operations directors, senior executives, and business managers to help with assessing and planning business strategies and tactics.



# Roles and Responsibilities: MBB

---

- MBB commonly advises management team on the cost of poor quality of an operation and consults on methods to improve business performance.
- **Typical Responsibilities of a MBB**
  - Identifies and defines the portfolio of projects required to support a business strategy
  - Establishes scope, goals, timelines, and milestones
  - Assigns and marshals resources
  - Trains and mentors Green Belts and Black Belts
  - Facilitates tollgates or checkpoints for Belt candidates
  - Reports-out/updates stakeholders and executives
  - Establishes organization's Six Sigma strategy/roadmap
  - Leads the implementation of Six Sigma.



# Roles and Responsibilities: BB

---

- The **Black Belt** (BB) is the most active and valuable experienced Six Sigma professional among all the Six Sigma Belts.
- A typical BB has
  - led multiple projects
  - trained and mentored various Green Belts candidates
  - understood how to define a problem and drive effective solution.
- The BB is well rounded in terms of project management, statistical analysis, financial analysis, meeting facilitation, prioritization, and a range of other value-added capabilities, which makes a BB highly valuable asset in the business world.

# Roles and Responsibilities: BB

---

- BBs commonly serve as the dedicated resource continuing their line management role while simultaneously achieving a BB certification.
- **Typical Responsibilities of a BB**
  - Project Management
    - Defines projects, scope, teams etc.
    - Marshals resources
    - Establishes goals, timelines, and milestones
    - Provides reports and/or updates to stakeholders and executives.



# Roles and Responsibilities: BB

---

- **Typical Responsibilities of a BB** *(continued)*
  - Task Management
    - Establishes the team's Lean Sigma roadmap
    - Plans and implements the use of Lean Sigma tools
    - Facilitates project meetings
    - Does project management of the team's work
    - Manages progress toward objectives.
  - Team Management
    - Chooses or recommend team members
    - Defines ground rules for the project team
    - Coaches, mentors, and directs project team
    - Coaches other Six Sigma Belts
    - Manages the team's organizational interfaces.





# Roles and Responsibilities: GB

---

- The **Green Belt** (GB) is considered as a less intense version of Six Sigma professional than the Black Belt (BB).
- A GB is exposed to all the comprehensive aspects of Six Sigma with less focus on the statistical theories and some other advanced analytical methodologies such as Design of Experiment (DOE).
- When it comes to project management, a GB has almost the same responsibilities as a BB.
- In general, the GB works on less complicated and challenging business problems than a BB.

# Roles and Responsibilities: GB

---

- **Typical Responsibilities of a Green Belt**
  - Project Management
    - Defines the project, scope, team etc.
    - Marshals resources
    - Sets goals, timelines, and milestones
    - Reports-out/updates stakeholders and executives.
  - Task Management
    - Establishes the team's Lean Sigma Roadmap
    - Plans and implements the use of Lean Sigma tools
    - Facilitates project meetings
    - Does Project Management of the team's work
    - Manages progress toward objectives.
  - Team Management
    - Chooses or recommends team members
    - Defines ground rules for the project team
    - Coaches, mentors, and directs project team
    - Coaches other Six Sigma Belts
    - Manages the team's organizational interfaces.



# Roles and Responsibilities: YB

---

- The **Yellow Belt** (YB) understands the basic objectives and methods of a Six Sigma project.
- YB has an elementary understanding about what other Six Sigma Belts (GB, BB, MBB) are doing to help them succeed.
- In a Six Sigma project, YB usually serves as a subject matter expert regarding some aspects of the process or project.
- Supervisors, managers, directors, and sometimes executives are usually trained at the YB level.



# Roles and Responsibilities: YB

---

- **Typical Responsibilities of a Yellow Belt**

- Helps define process scope and parameters
- Contributes to team selection process
- Assists in information and data collection
- Participates in experiential analysis sessions (FMEA, Process Mapping, Cause and Effect etc.)
- Assists in assessing and developing solutions
- Delivers solution implementations.



# Roles and Responsibilities: Champions & Sponsors

---

- **Champions and sponsors** are those individuals (directors, executives, managers etc.) chartering, funding, or driving the Six Sigma projects that BBs and GBs are conducting.
- Champions and sponsors need to have a basic understanding of the concepts, tools, and techniques involved in the DMAIC methodology so that they can provide proper support and direction.



# Roles and Responsibilities: Champions & Sponsors

---

- Champions and sponsors play critical roles in the successful deployment of Six Sigma.
- Strong endorsement of Six Sigma from the leadership team is critical for success.
- **Typical Responsibilities of a Champion/Sponsor**
  - Maintains a strategic oversight
  - Establishes strategy and direction for a portfolio of projects
  - Clearly defines success
  - Provides resolution for issues such as resources or politics
  - Establishes routine tollgates or project reviews
  - Clears the path for solution implementation
  - Assists in project team formation.



# Roles and Responsibilities: Stakeholders

---

- **Stakeholders** are usually the recipients or beneficiaries of the success of a Six Sigma project.
- Stakeholders are individuals owning the process, function, or production/service line that a Six Sigma Belt focuses on improving the performance of.
- BBs and GBs need to keep strong working relationships with stakeholders because without their support, it would be extremely difficult to make the Six Sigma project a success.



# Roles and Responsibilities: SMEs

---

- **Subject Matter Experts (SMEs)** are commonly known as the experts of the process or subject matter.
- Six Sigma Belts should proactively look to key SMEs to round out their working project team.
- SMEs play critical roles to the success of a project.
  - Based on SMEs' extensive knowledge about the process, they have the experience to identify which solutions can work and which cannot work.
  - SMEs who simply do not speak up can hurt the chances of the process' success.
  - SMEs are also the same people who prefer to keep the status quo. Six Sigma Belts may find many of them unwilling to help implement the changes.





# Roles and Responsibilities

---

- Throughout this module we have reviewed the various common roles and corresponding responsibilities in any Six Sigma program:
  - Six Sigma Master Black Belt
  - Six Sigma Black Belt
  - Six Sigma Green Belt
  - Six Sigma Yellow Belt
  - Champion and Sponsors
  - Stakeholders
  - Subject Matter Experts (SMEs)
- These Six Sigma belts and other roles are designed to deliver value to the business effectively and successfully.



# 1.2. Six Sigma Fundamentals



# Yellow Belt Training: Define Phase

---

## 1.1 Six Sigma Overview

- 1.1.1 What is Six Sigma
- 1.1.2 Six Sigma History
- 1.1.3 Six Sigma Approach  $Y = f(x)$
- 1.1.4 Six Sigma Methodology
- 1.1.5 Roles and Responsibilities

## 1.2 Six Sigma Fundamentals

- 1.2.1 Defining a Process
- 1.2.3 QFD
- 1.2.4 Cost of Poor Quality (COPQ)
- 1.2.5 Pareto Analysis (80:20 rule)

## 1.3 Lean Six Sigma Projects

- 1.3.1 Six Sigma Metrics
- 1.3.2 Business Case and Charter
- 1.3.3 Project Team Selection
- 1.3.4 Project Risk Management
- 1.3.5 Project Planning

## 1.4 Lean Fundamentals

- 1.4.1 Lean and Six Sigma
- 1.4.2 History of Lean
- 1.4.3 The Seven Deadly Muda
- 1.4.4 Five-S (5S)

# 1.2.1 Defining a Process



# Defining a Process

---

- The basic method of defining and understanding a process is the **process map**.
- Process maps help determine where and how a process begins as well as all the steps and decisions in between.
- By learning the various types and methods of process maps, you can become adept at setting project scopes, identifying value-added and non-value-added steps, identifying problems in a process, etc.
- This module covers:
  - High-level process maps
  - Detailed process maps
  - Functional maps.
- In the Measure section we will touch on several other types and methods of process mapping.



# What is a Process Map?

---

- A **process map** is a graphical representation of a process flow.
  - It illustrates how the business process is accomplished step by step.
  - It describes how the materials or information sequentially flow from one business entity to the next.
  - It illustrates who is responsible for what between the process boundaries.
  - It depicts the inputs and outputs of each individual process step.
- 
- Always encourage your project team to map the current state of the process instead of the ideal state. Be honest with each other!



# Process Map Basic Symbols

---


- The following four symbols are the most commonly used symbols in a process map.



*Terminator (Oval):*  
Shows the start and end points in the process.



*Process (Rectangle):*  
Indicates a single process step.



*Decision (Diamond):*  
Indicates a question with two choices (e.g. Yes/No)



*Flow Line (Arrow):*  
Shows the direction of the process flow.



# Additional Process Symbols

---

- Additional Process Symbols:



*Alternative Process:*

Indicates a process step as an alternate of a normal step.



*Predefined Process:*

Indicates a formally-defined process step. Other documentation or instruction is needed to support further details of the step.



*Manual Operation:*

Indicates a process step conducted manually.



*Preparation:*

Indicates a preparation step.



*Delay:*

Indicates a waiting period in the process.





# Additional Process Symbols

---

- Additional File and Information Related Symbols:




*Data (I/O):*

Shows the inputs and outputs of a process.



*Document:*

Indicates a process step that results in a document.



*Multi-Document:*

Indicates a process step that results in multiple documents.



*Stored Data:*

Indicates a process step that stores data.



*Magnetic Disk:*

Indicates a database.



# Additional Process Symbols


---

- Additional Control of Flow Symbols:



*Off-Page Connector:*

Indicates the process flow continues onto another page.



*Merge:*

Indicates multiple processes merge into one.



*Extract:*

Indicates a process splits into multiple parallel processes.



*Or:*

Indicates a single data processing flow diverges to multiple branches with different criteria requirements.



*Summing Junction:*

Indicates multiple data processing flows converge into one.



# How to Plot a Process Map

---

- Step 1: Define the boundaries of the process you want to map.
  - A process map can depict the flow of an entire process or a segment of it.
  - You need to identify and define the beginning and ending points of the process before starting to plot.
  - Use operational definitions where possible.



# How to Plot a Process Map

---

- Step 2: Define and sort the process steps with the flow.
  - Consult with process owners and SMEs or observe the process in action to understand how the process is actually performed.
  - Record the process steps and sort them according to the order of their occurrence.



# How to Plot a Process Map


---

- Step 3: Fill the step information into the appropriate process symbols and plot the diagram.
  - In the team meeting of process mapping, place the sticky notes with different colors on a white board so you can move them around while the map is under-construction.
  - The flow lines can be plotted directly on the white board.
  - Decision steps. Rotate the sticky note 45 degrees.
  - When the map is completed on the white board, record the map using Excel, PowerPoint, Visio, Quality Companion, or other preferred software.



# How to Plot a Process Map

- Step 3:
  - To illustrate the responsibility of different organizations involved in the process, use a Swim Lane Process Map.

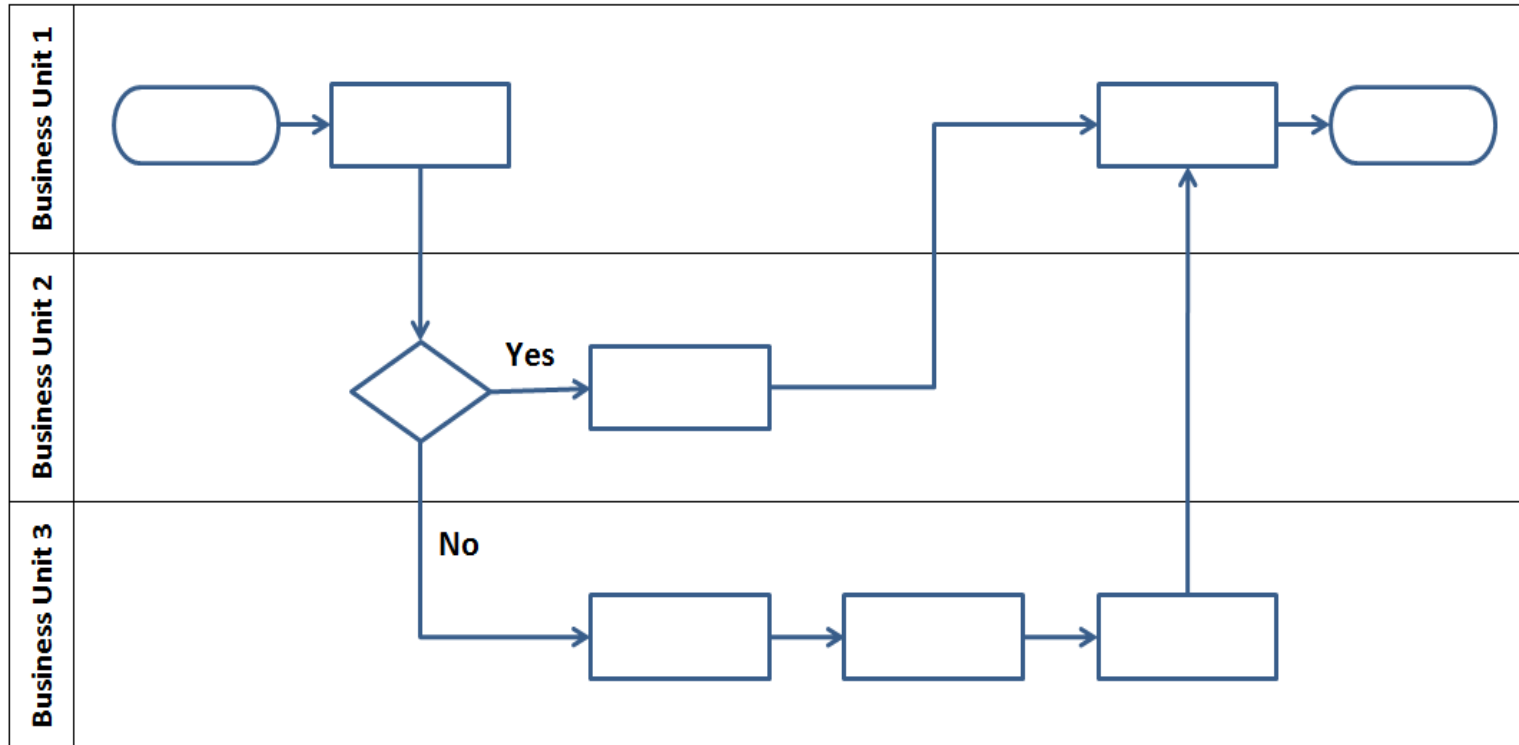

# How to Plot a Process Map

---

- Step 4: Identify and record inputs/outputs and their corresponding specifications for each process step.
  - The process map helps in understanding and documenting  $Y = f(x)$  of a process, where Y represents the outputs and x represents the inputs.
  - The inputs of each process step can be controllable or non-controllable, standardized operational procedures, or noise.
  - Inputs are the source of variation in the process and need to be analyzed qualitatively and quantitatively.
  - The outputs of each process step can be products, information, services, etc. They are the little Y's within the process.



# How to Plot a Process Map

---


- Step 5: Evaluate the process map and adjust if needed.
  - If the process is too complicated to be covered in one single process map, you may create additional detailed sub-process maps for further information.
  - Number the process steps in the order of their occurrence for clarity.





# High Level Process Map

- Most high-level process maps are also referred to as **flow charts**.
- The key to a high-level process map is to over-simplify the process being depicted so that it can be understood in its most generic form.
- As a general rule, high-level process maps should be no more than 4–6 steps.
- Below is an oversimplified version of a high-level process map for cooking a 10lb prime rib for a dozen holiday guests.

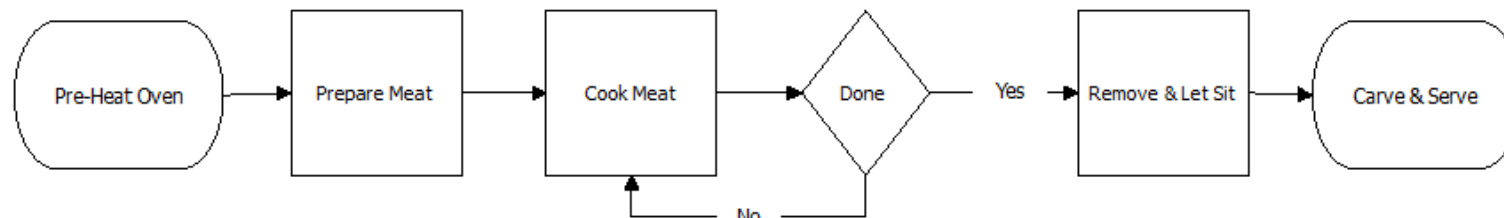


# Detailed Process Map

---

- Detailed process maps or multi-level maps take the high-level map much further.
- Detailed maps can be 2–4 levels deeper than your high-level process map.
- A good guideline used to help create the second level is to take each step in the high level map and break it down into 2–4 steps (no more).
- Repeat this process (level 3, level 4 etc.) until reaching the desired level of detail.
- Some detailed maps are 2 or 3 levels deep, others can be 5–6 levels deep. Obviously, the deeper the levels, the more complex and the more burdensome.



# Detailed Process Map

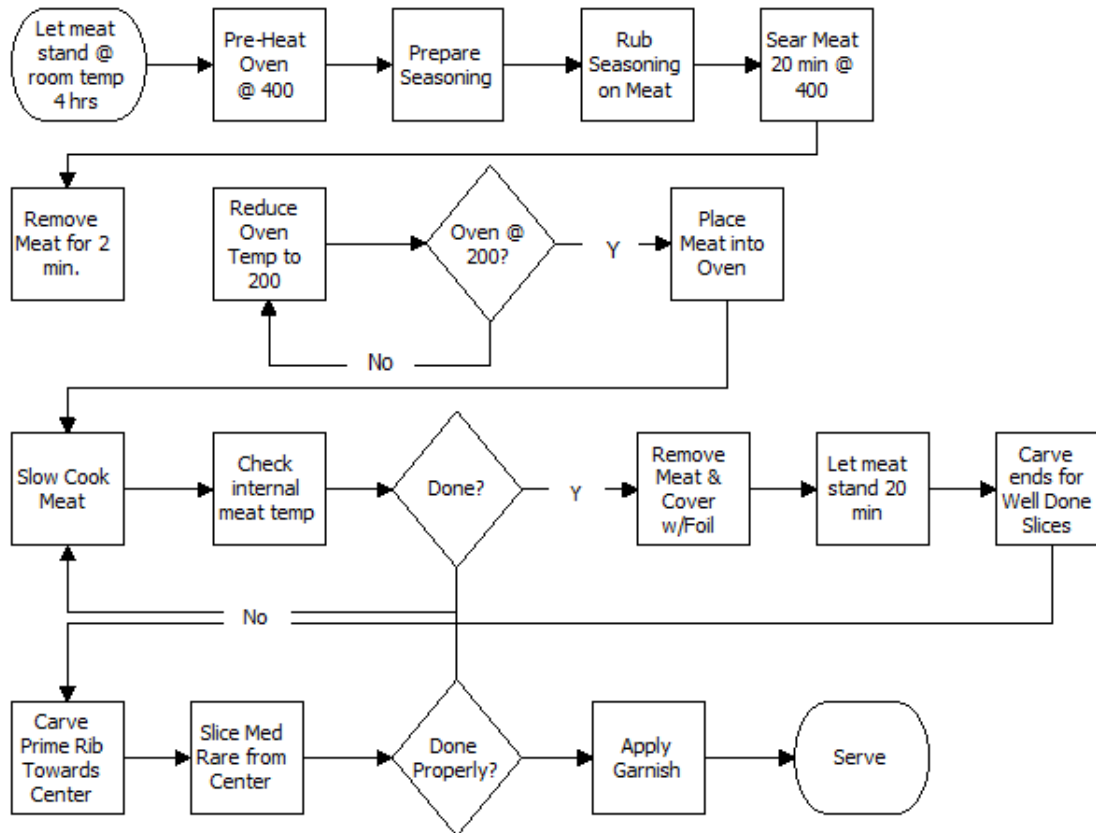


- At left is our prime rib cooking example at **level 2 detail**.
- This process map has a few more decision points and process steps.
- You can see that going only one more level deep adds a fair amount of information to the process map.



# Functional Process Map

- The functional map adds dimension to the high-level or detailed map.
- The dimension added is identifying which function or job performs the step or makes the decision.
- Below is a generic example of a functional map. Note that functions are identified in horizontal lanes and each process step is placed in the appropriate lane based on which function performs the step.

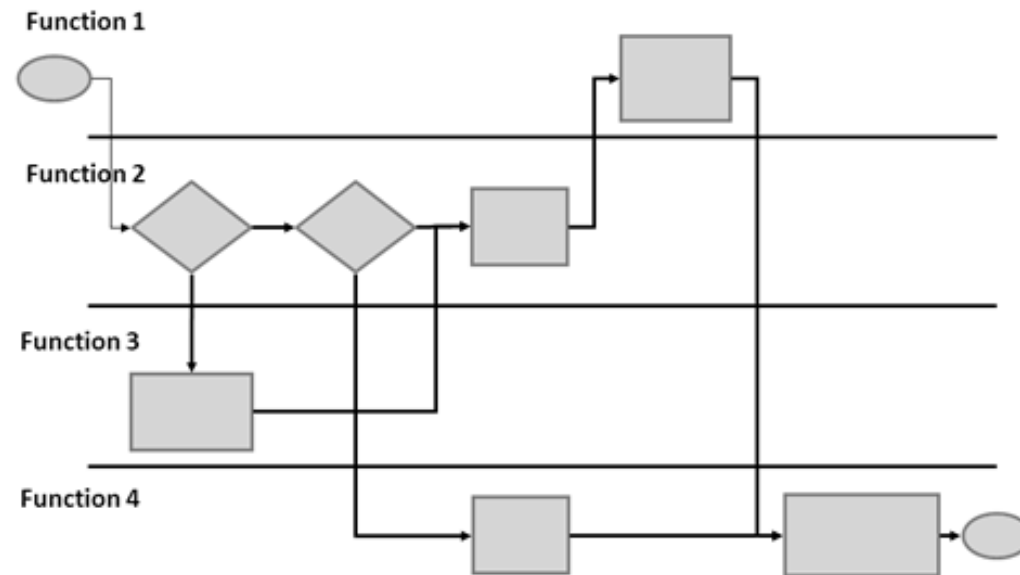

## 1.2.2 VOC and CTQs



# Voice of the Customer

---

- **VOC** stands for “Voice of the Customer.”
- Voice of the customer is a term used for a data-driven plan to discover customer wants and needs.
- VOC is an important component to a successful Six Sigma project.
- There are also other “Voices” that need to be heard when conducting projects. The 3 primary forms are:
  - VOC: Voice of the Customer
  - VOB: Voice of the Business
  - VOA: Voice of the Associate.



# Gathering VOC

---


- Gathering VOC should be performed methodically.
- The two most popular methods of collecting VOC are
  1. Indirect
  2. Direct.
- 1. Indirect data collection for VOC involves passive information exchange:
  - Warranty claims
  - Customer complaints/compliments
  - Service calls
  - Sales reports.
- 2. Indirect methods are less effective, sometimes dated, require heavy interpretation, and are also more difficult to confirm.



# Gathering VOC

---

- Direct data collection methods for VOC are active and planned customer engagements:
  - Conducting interviews
  - Conducting customer surveys
  - Conducting market research
  - Hosting focus groups.
- Direct methods are typically more effective for several reasons:
  - Less need to interpret meaning
  - Researchers can go a little deeper when interacting with customers
  - Customers are aware of their participation and will respond better upon follow-up
  - Researchers can properly plan engagements (questions, sample size, information collection techniques etc.).





# Gathering VOC

---

- Gathering VOC requires consideration of many factors such as product or services types, customer segments, manufacturing methods or facilities etc.
- All this information will influence the sampling strategy.
- Consider which factors are important and build a sample size plan around them.
- Also, consider response rates and adjust the initial sample strategy to ensure adequate input is received.
- Once a sampling plan is in place, collect data via the direct and indirect methods discussed earlier.
- After gathering VOC it will be necessary to translate it into something meaningful: CTQs.



# Critical to Quality: CTQ

---

- **CTQ** stands for Critical to Quality.
- CTQs are translated from VOC or “voice of the customer” feedback.
- VOC is often vague, emotional, or simply a generalization about products or services.
- CTQs are the quantifiable, measureable, and meaningful translations of VOC.
- Organizing VOC helps to identify CTQs.
- One effective way to organize VOC is to group or bucket it using an **affinity diagram**.
- Affinity diagrams are ideal for large amounts of soft data resulting from brainstorming sessions or surveys.



# Affinity Diagram: Building a CTQ Tree


---

- Steps for conducting an Affinity Diagram exercise:
  - Step 1: Clearly define the question or focus of the exercise (“Why are associates late for work?”).
  - Step 2: Record all participant responses on note cards or sticky notes (this is the sloppy part, record everything!).
  - Step 3: Lay out all note cards or post the sticky notes onto a wall.
  - Step 4: Look for and identify common themes.
  - Step 5: Begin moving the note cards or sticky notes into the themes until all responses are allocated.
  - Step 6: Re-evaluate and make adjustments.




# Affinity Diagram: Building a CTQ Tree

- Define the question or focus
- Record responses on note cards or sticky notes
- Display all note cards or sticky notes on a wall if necessary.

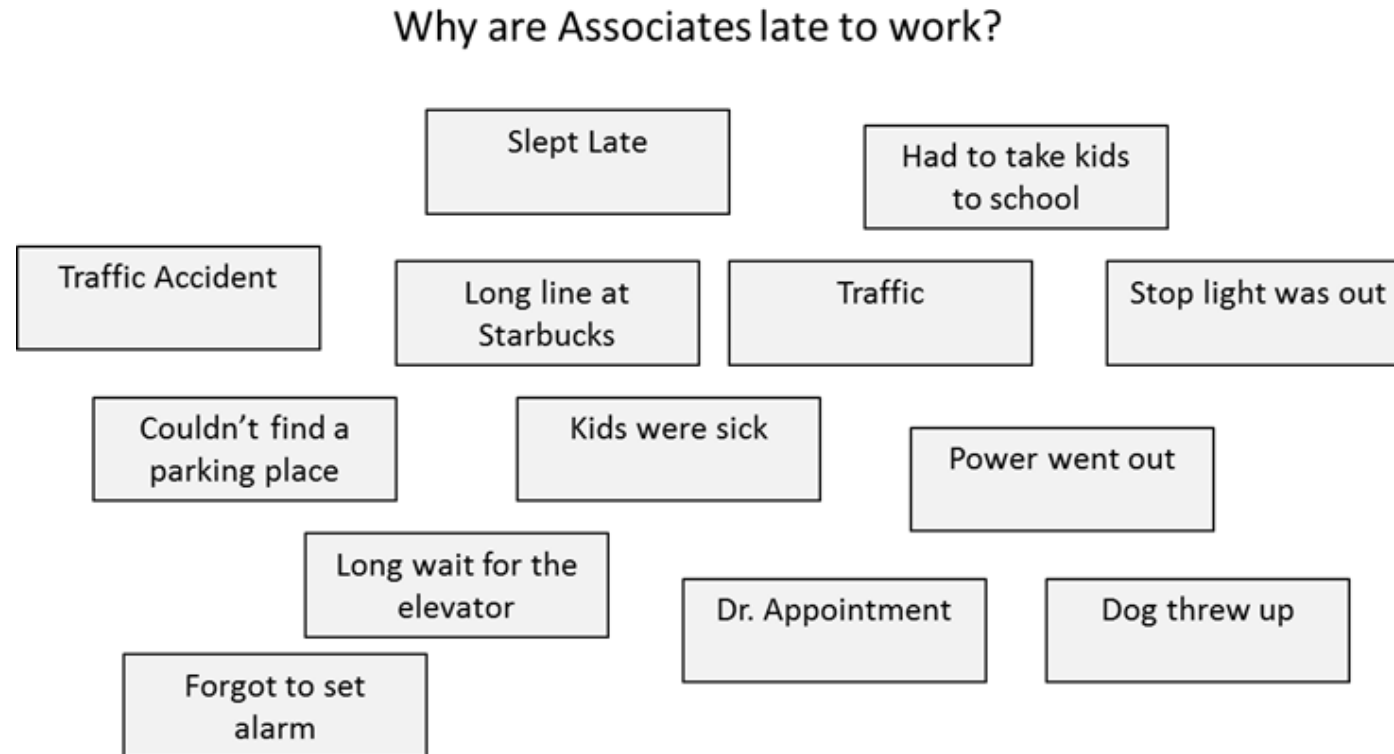

# Affinity Diagram: Building a CTQ Tree


- Look for and identify common themes within the responses.

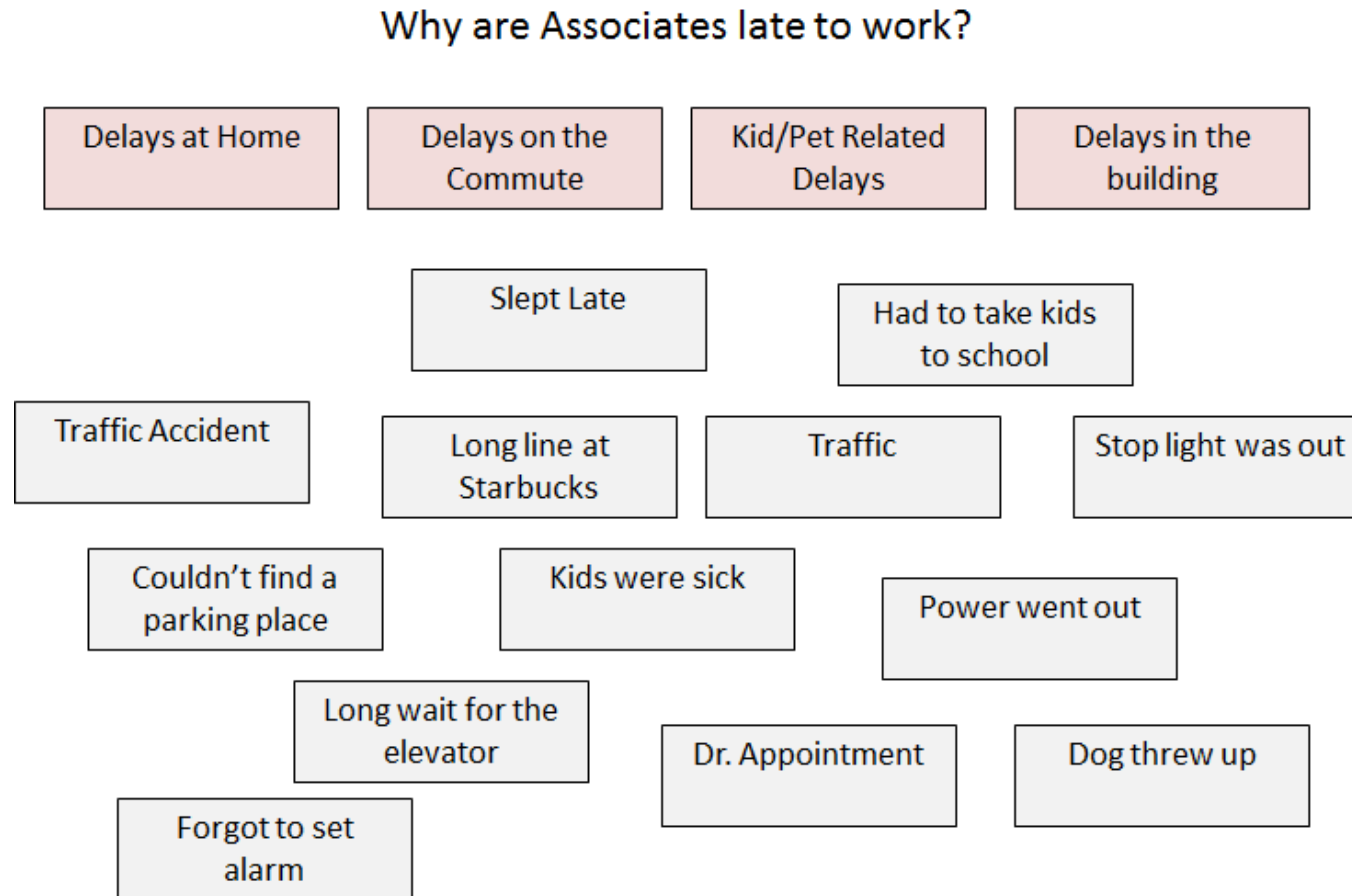

# Affinity Diagram: Building a CTQ Tree


- Group note cards or sticky notes into themes until all responses are allocated.
- Re-evaluate and make final adjustments.

## Why are Associates late to work?

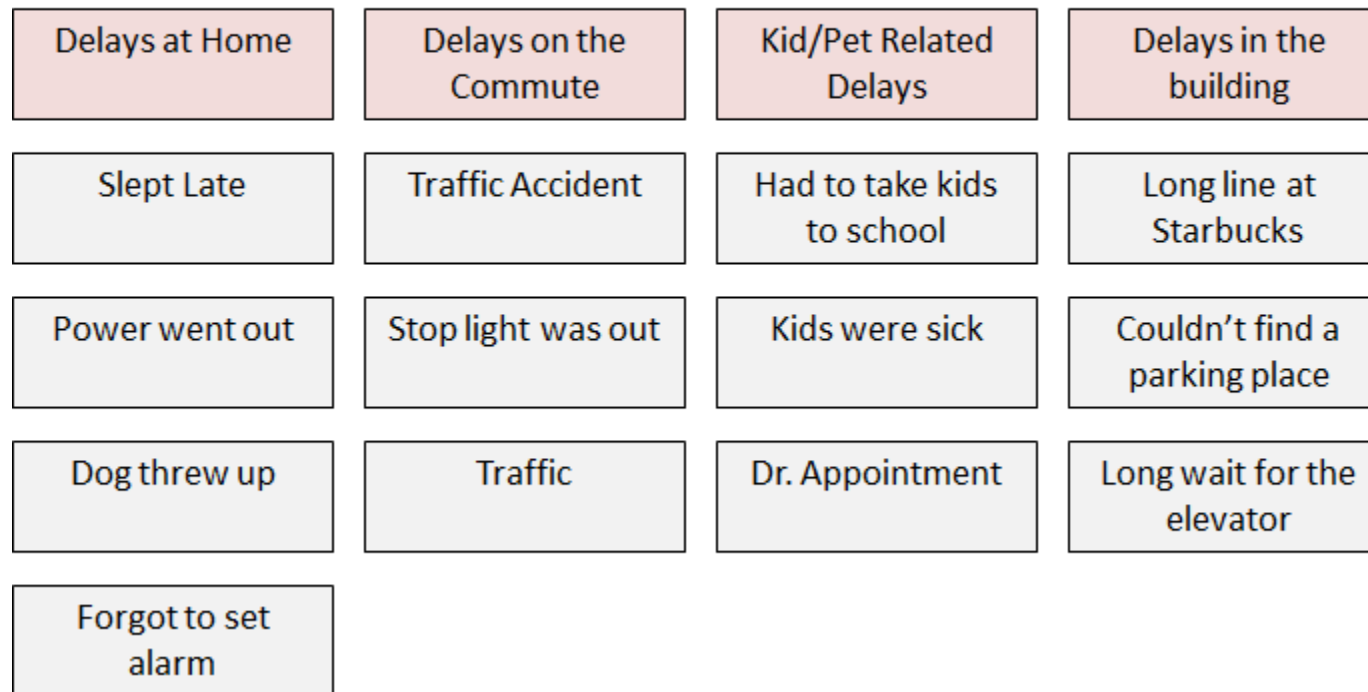


# CTQ Tree

- Example of a generic CTQ tree transposed from a white board to a software package.

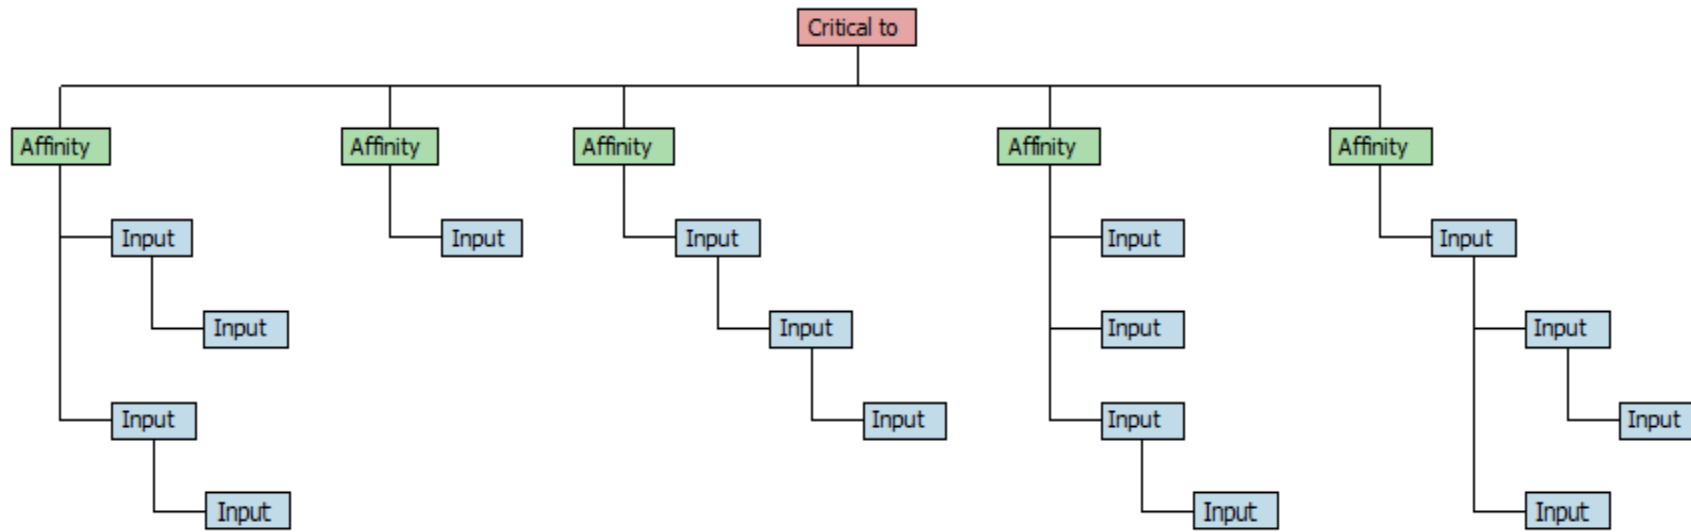

# Kano

- Another VOC categorization technique is the Kano.
- The Kano model was developed by Noriaki Kano in the 1980s.
- The Kano model is a graphic tool that further categorizes VOC and CTQs into 3 distinct groups:
  - Must Haves
  - Performance Attributes
  - Delighters.

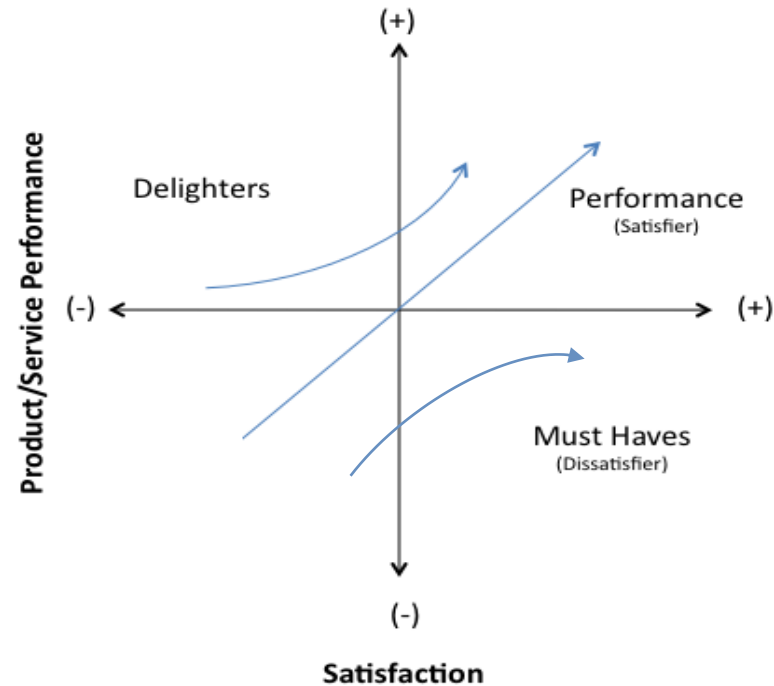

- The Kano helps to identify CTQs that add incremental value vs. those that are simply requirements and having more is not necessarily better.





# Validating VOC and CTQs


---

- After determining all CTQs, confirm them with the customer.
- Confirming can be accomplished by conducting surveys through one or more of the following methods:
  - Group sessions
  - One-on-one meetings
  - Phone interviews
  - Electronic means (chat, email, social media etc.)
  - Physical mail.
- Consider your confirming audience and try to avoid factors that may influence or bias responses such as inconvenience or overly burdensome time commitments.



# Translating CTQs to Requirements

- Lastly, CTQs must be transformed into **specifics** that can be built upon in a process.
- A **requirements tree** translates CTQs to meaningful and measurable requirements for production processes and products.

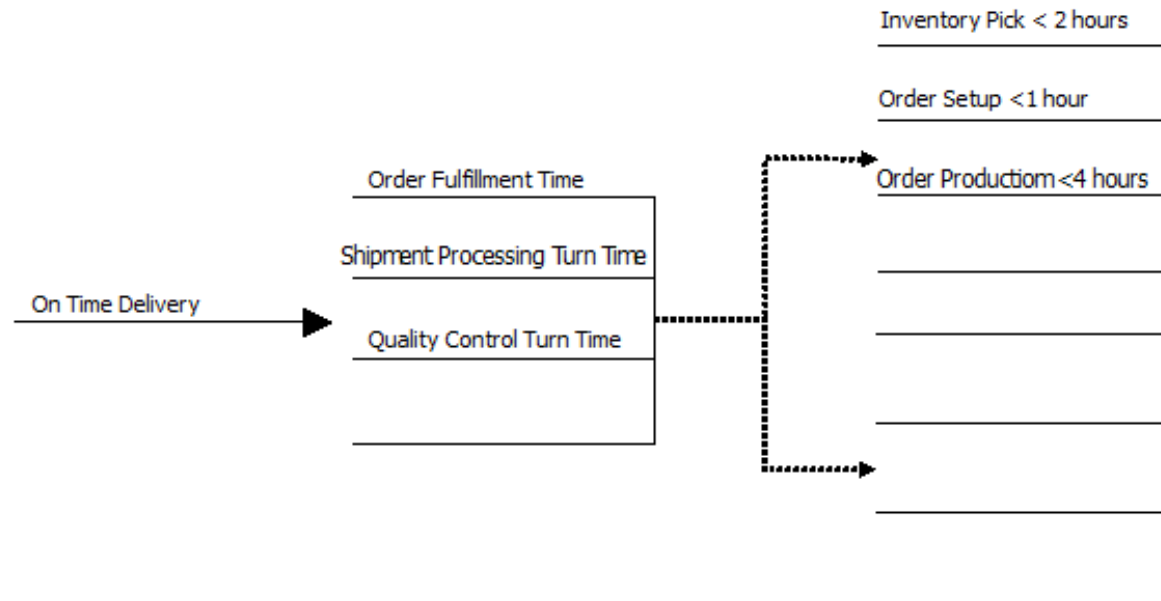

# 1.2.3 Quality Function Deployment



# History of QFD

---

- Developed by Shigeru Mizuno (1910–1989) and Yoji Akao (b. 1928) in Japan. Quality Function Deployment (QFD) aims to design products that assure customer satisfaction and value – the first time and every time.
- The QFD framework can be used for translating actual customer statements and needs (“The voice of the customer”) into actions and designs to build and deliver a quality product.



# What is QFD?

---

- **Quality Function Deployment (QFD)** is a construction methodology and quantification tool used to identify and measure customer's requirements and transform them into meaningful and measurable parameters.
- QFD helps to prioritize actions to advance process or product to meet customer's anticipations.
- QFD is an excellent tool for contact between cross-functional groups.



# Purpose of QFD

---

The quality function deployment has many purposes. Among the most important are:

- Market analysis to establish needs and expectations
- Examination of competitors' abilities
- Identification of key factors for success
- Translation of key factors into product and process characteristics.

# Phases of QFD

---

## Four Key Phases of QFD

- **Phase I:** Product Planning Including the “House of Quality” (Requirements Engineering Life Cycle)
- **Phase II:** Product Design (Design Life Cycles)
- **Phase III:** Process Planning (Implementation Life Cycle)
- **Phase IV:** Process Control (Testing Life Cycle)



# How to build a House of Quality


---

- Determine Customer Requirements (*What's* from VOC/CTQ)
- Technical Specifications/Design Requirements (*How's*)
- Develop Relationship Matrix (*What's* and *How's*)
- Prioritize Customer Requirements
- Conduct Competitive Assessments
- Develop Interrelationship (*How's*)
- Prioritize Design Requirements







# House of Quality

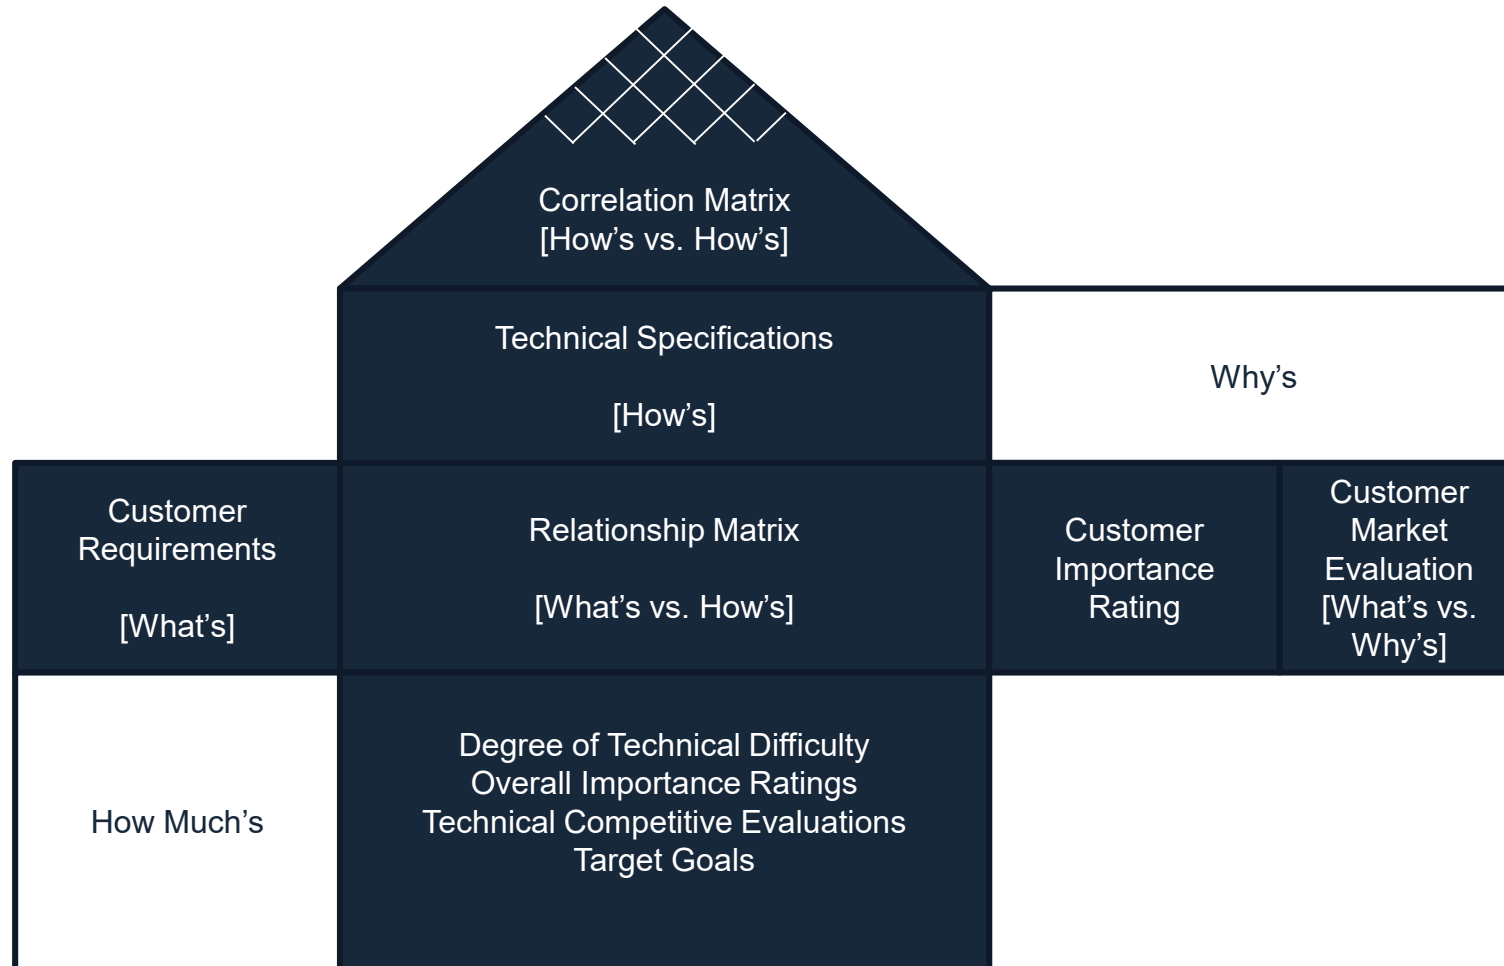



# Step 1: Determine Customer Requirements

- Identify the important customer requirements. These are the “What’s” and are typically determined through the VOC/CTQ process.
- Use the results from your requirements tree diagram as inputs for the customer requirements in your HOQ.

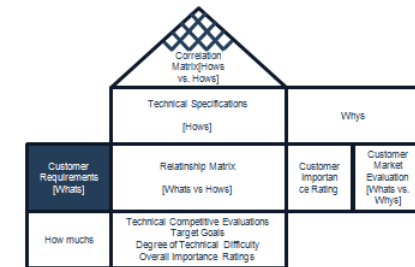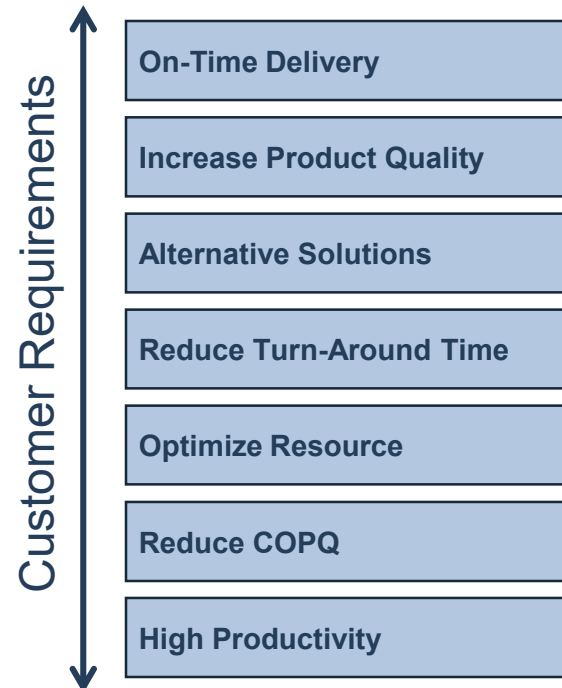

# Step 2: Technical Specification

- Potential choices for product features
- Voice of Designers or Engineers
- Each “What” item must be refined to “How’s”

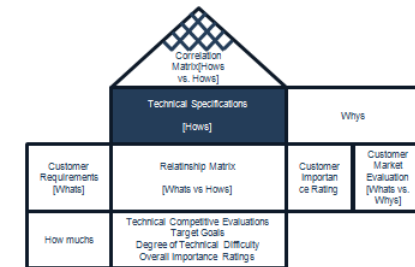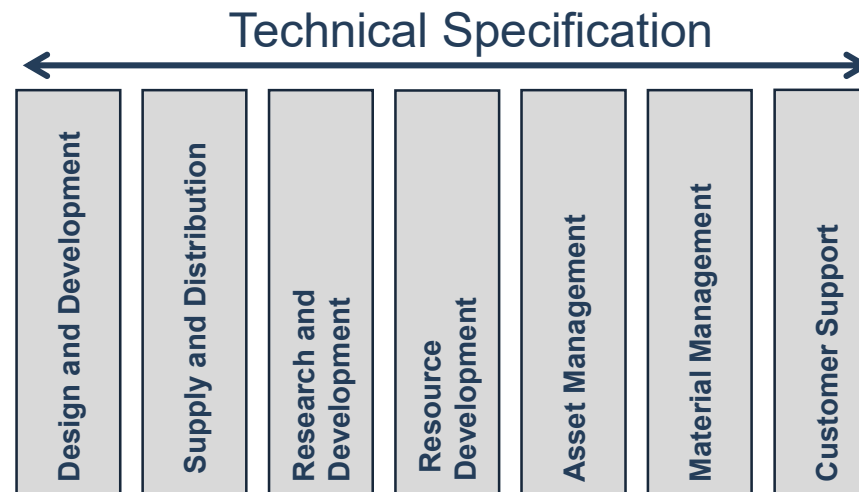


# Step 3: Develop Relationship Matrix (What's & How's)

- This is the center portion of the house. Each cell represents how each technical specification relates to each customer requirement.

Relationship between Customer Requirements and Technical Specifications  
WHATs vs. HOWs

◎ +9 Strong  
 ○ +3 Medium  
 △ +1 Weak


Customer Requirements	Technical Specification						
	Design and Development	Supply and Distribution	Research and Development	Resource Development	Asset Management	Material Management	Customer Support
Ontime Delivery	◎	○		○	△	◎	
Increase Product Quality	○	◎		○	△	◎	
Alternative solutions	◎	△	△	◎		○	○
Reduce Turn around time	△	◎		○	◎		◎
Optimize Resource		△					△
Reduce CoPQ		◎			○	△	○
High Productivity	△					△	◎

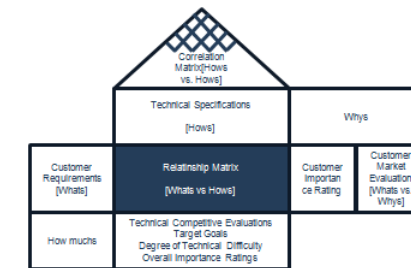

# Step 4: Prioritize Customer Requirements

- This is the right portion of the house. Each cell represents customer requirements based on relative importance to customers and perceptions of competitive performance.


	Design and Development	Supply and Distribution	Research and Development	Resource Development	Asset Management	Material Management	Customer Support	Customer Preferences
Ontime Delivery	●	○	□	○	△	●	□	3
Increase Product Quality	○	●	□	○	△	●	□	5
Alternative solutions	●	△	△	●	□	○	○	4
Reduce Turn around time	△	●	□	○	●	□	●	2
Optimize Resource	□	△	□	□	□	□	△	3
Reduce CoPQ	□	●	□	□	○	△	○	4
High Productivity	△	□	□	□	□	△	●	1

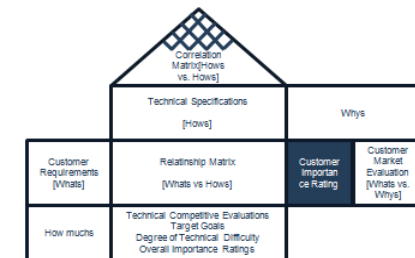

# Step 5: Competitive Assessments



- This is the extreme right portion of the house. Comparison of the organization's product to competitors' products.

	Design and Development	Supply and Distribution	Research and Development	Resource Development	Asset Management	Material Management	Customer Support	Customer Preferences	Our Company	Competitor 1	Competitor 2
Overtime Delivery	◎	○	□	○	△	◎	□	3	4	4	3
Increase Product Quality	○	◎	□	○	△	◎	□	5	3	3	1
Alternative solutions	◎	△	△	◎	□	○	○	4	1	2	5
Reduce Turn around time	△	◎	□	○	◎	□	◎	2	2	1	2
Optimize Resource	□	△	□	□	□	□	△	3	3	4	3
Reduce CoPQ	□	◎	□	□	○	△	○	4	2	5	1
High Productivity	△	□	□	□	□	△	◎	1	5	3	3

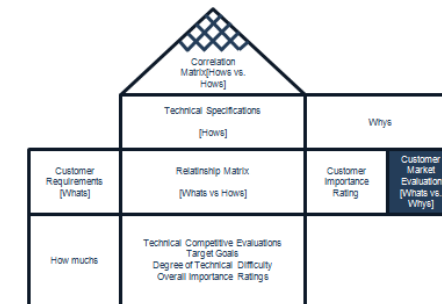

# Step 6: Correlation Matrix


- This is the top portion of the house. It identifies the way “how” items either support (positive) or conflict (negative) with one another.

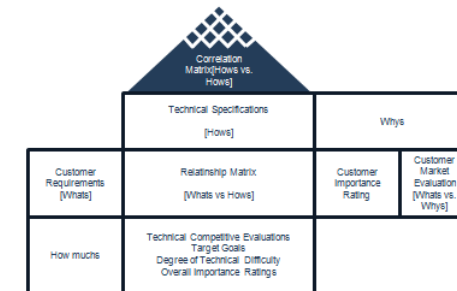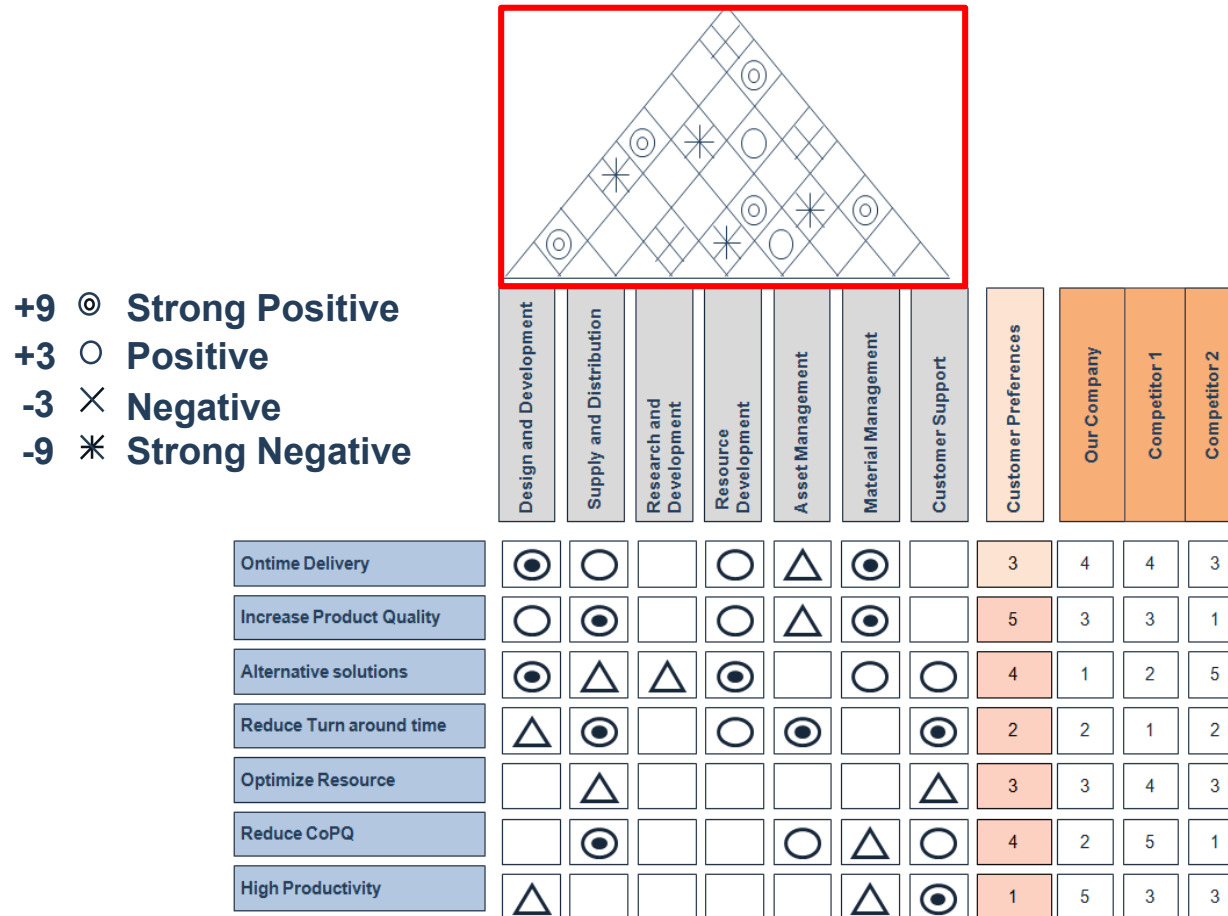

# Step 7: Prioritize Design Requirements

- Overall Importance Ratings
- Function of relationship ratings and customer prioritization ratings
- Technical Difficulty Assessment
- Similar to customer market competitive evaluations but conducted by the technical team

	Design and Development	Supply and Distribution	Research and Development	Resource Development	Asset Management	Material Management	Customer Support	Customer Preferences	Our Company	Competitor 1	Competitor 2
Ontime Delivery	⊙	⊙	⊙	⊙	⊙	⊙	⊙	3	4	4	3
Increase Product Quality	⊙	⊙	⊙	⊙	⊙	⊙	⊙	5	3	3	1
Alternative solutions	⊙	⊙	⊙	⊙	⊙	⊙	⊙	4	1	2	5
Reduce Turn around time	⊙	⊙	⊙	⊙	⊙	⊙	⊙	2	2	1	2
Optimize Resource	⊙	⊙	⊙	⊙	⊙	⊙	⊙	3	3	4	3
Reduce CoPQ	⊙	⊙	⊙	⊙	⊙	⊙	⊙	4	2	5	1
High Productivity	⊙	⊙	⊙	⊙	⊙	⊙	⊙	1	5	3	3
<b>Overall Importance Ratings</b>	81	115	4	66	36	89	54				
<b>Degree of Technical Difficulty</b>	7	12	9	5	11	35	12				
<b>Technical Benchmarking</b>											
Our Product	3	134	225	2	5	3	2				
Competitor 1	2	167	320	6	2	4	5				
Competitor 2	1	188	156	7	5	2	2				
Target / Goal	3	213	225	9	7	1	1				

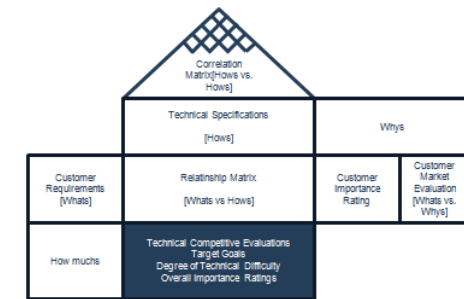





# Step 7: Prioritize Design Requirements

- Technical Specification Competitive Evaluation
- Helps to establish the feasibility and realization of each “how” item
- Target Goals
- How much is good enough to satisfy the customer

	Design and Development	Supply and Distribution	Research and Development	Resource Development	Asset Management	Material Management	Customer Support	Customer Preferences	Our Company	Competitor 1	Competitor 2
Ontime Delivery	⊙	○	□	○	△	⊙	□	3	4	4	3
Increase Product Quality	○	⊙	□	○	△	⊙	□	5	3	3	1
Alternative solutions	⊙	△	△	⊙	□	○	○	4	1	2	5
Reduce Turn around time	△	⊙	□	○	⊙	□	⊙	2	2	1	2
Optimize Resource	□	△	□	□	□	□	△	3	3	4	3
Reduce CoPQ	□	⊙	□	□	○	△	○	4	2	5	1
High Productivity	△	□	□	□	□	△	⊙	1	5	3	3
Overall Importance Ratings	81	115	4	66	38	89	54				
Degree of Technical Difficulty	7	12	9	5	11	35	12				
Technical Benchmarking											
Our Product	3	134	225	2	5	3	2				
Competitor 1	2	167	320	6	2	4	5				
Competitor 2	1	188	156	7	5	2	2				
Target / Goal	3	213	225	9	7	1	1				

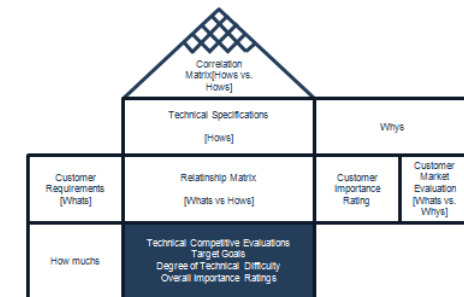

# House of Quality

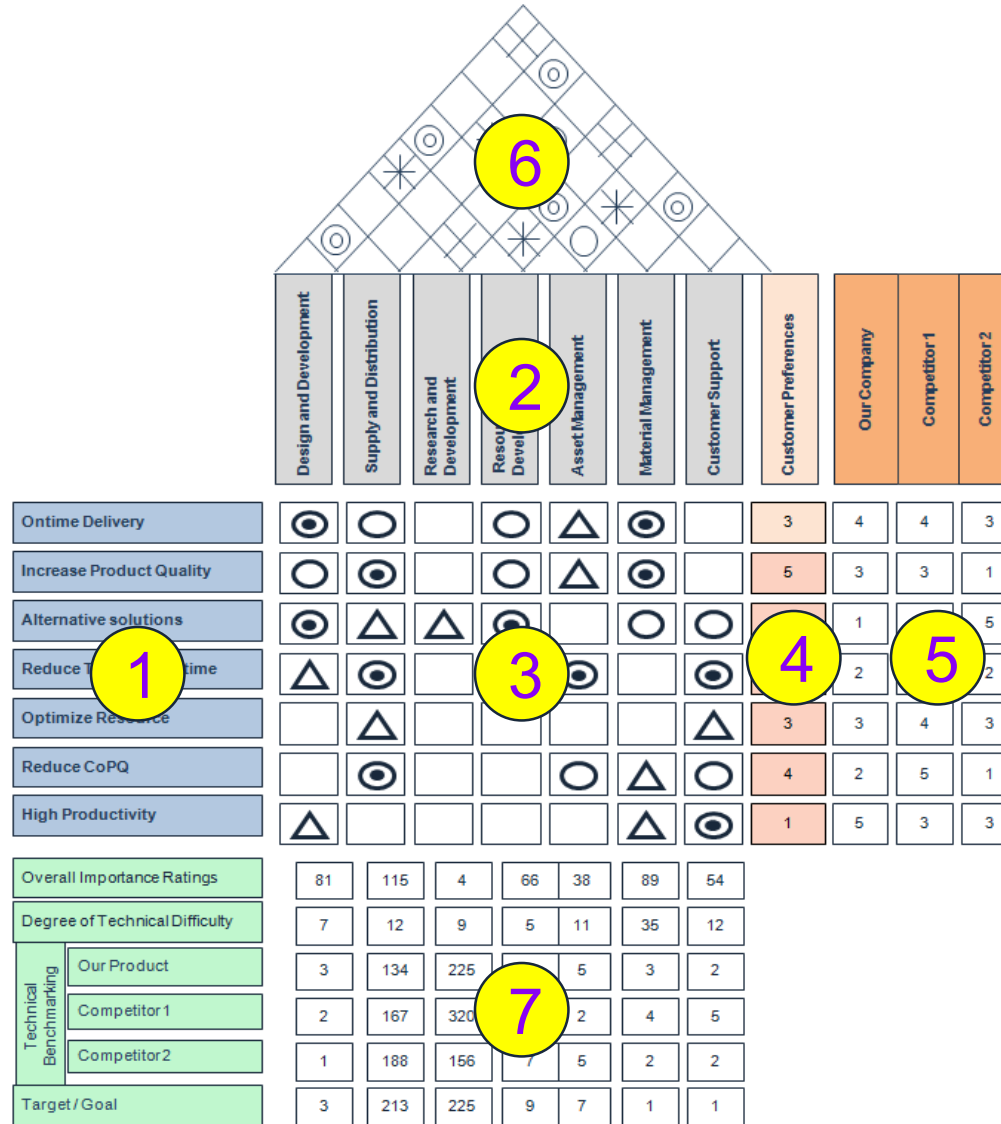

# Pros of QFD

---

- Focuses the design of the product or process on satisfying customer's needs and wants.
- Improves the contact channels between customers, advertising, research and improvement, quality and production departments, which sustains better decision making.
- Reduces the new product development project period and cost.

# Cons of QFD

---

- The relationship matrix can be too obscure with many process inputs and/or many customer constraints.
- It can be very complicated and difficult to implement without experience.
- If throughout the process new ideas, specifications, or requirements are not discovered, you run the risk of losing team members' trust in the process.

# QFD Summary

---

When used properly, the quality function deployment is an extremely valuable approach to product/process design.

There are many benefits of QFD that can only be realized when each step of the process is completed thoroughly:

- Logical way of obtaining information and presenting it
- Smallest product development cycle
- Considerably condensed start-up costs
- Fewer engineering alterations
- Reduced chance of supervision during design process
- Collaborating environment
- Preserving everything in characters.

# 1.2.4 Cost of Poor Quality



# Cost of Poor Quality

---

- Cost of Poor Quality (COPQ) is the expense incurred due to waste, inefficiencies, and defects



- The COPQ has been proven to range from 5% to 30% of gross sales for most companies.
- The COPQ can be staggering when considering process inefficiencies, hidden factories, defective products, rework, scrap, etc.
- Understanding COPQ and where to look for it will help uncover process inefficiencies, defects, and hidden factories within your business.

# Cost of Poor Quality

---

- There are 7 common forms of waste that are often referred to as the “**7 deadly muda.**”
- Technically, there are more than 7 forms of waste but if you can remember these you will capture over 90% of your waste.

1. Defects
2. Overproduction
3. Over-Processing
4. Inventory
5. Motion
6. Transportation
7. Waiting





# Cost of Poor Quality

- The “7 deadly muda” are very important to understand. They are the best way to identify the COPQ.
- The presence of any muda causes many other forms of inefficiencies and hidden factories to manifest themselves.
- There are four key categories of costs related to muda:
  1. Costs Related to Production
  2. Costs Related to Prevention
  3. Costs Related to Detection
  4. Costs Related to Obligation



# COPQ: Costs Related to Production

---

- Costs related to **production** are the direct costs of the presence of muda. These forms of COPQ are usually understood and easily observable. They are in fact the “7 deadly muda” themselves.
  1. Defects
  2. Overproduction
  3. Over-Processing
  4. Inventory
  5. Motion
  6. Transportation
  7. Waiting



# COPQ: Costs Related to Prevention

---

- Costs related to the **prevention** of muda are those associated with trying to reduce or eliminate any of the “7 deadly muda.”
  - Costs for error proofing methods or devices
  - Costs for process improvement and quality programs
  - Costs for training and certifications
  - etc.
- *Any costs* directly associated with the prevention of waste and defects should be included in the COPQ calculation.

# COPQ: Costs Related to Detection

---

- Costs related to the **detection** of muda are those associated with trying to find or observe any of the “7 deadly muda.”
  - Costs for sampling
  - Costs for quality control check points
  - Costs for inspection costs
  - Costs for cycle counts or inventory accuracy inspections
  - etc.
- Any costs directly associated with the detection of waste and defects should be included in the COPQ calculation.

# COPQ: Costs Related to Obligation

---

- Costs related to **obligation** are those associated with addressing the muda that reaches a customer.
  - Repair costs
  - Warranty costs
  - Replacement costs
  - Customer returns and customer service overhead
  - etc.
- Any costs directly associated with customer obligations should be included in the COPQ calculation.

# COPQ: Types of Cost

---

- There are two types of costs to be considered when determining COPQ
  1. **Hard Costs**
    - Tangible costs that can be traced to the income statement
  2. **Soft Costs**
    - Intangible costs: avoidance, opportunity costs, lost revenue etc.
- Calculating the COPQ
  1. Determine the types of waste that are present in your process
  2. Estimate the frequency of waste that occurs
  3. Estimate the cost per event, item, or time frame
  4. Do the math.

# 1.2.5 Pareto Charts and Analysis



# Pareto Principle

---

- The **Pareto principle** is commonly known as the “law of the vital few” or “80:20 rule.”
- It means that the majority (approximately 80%) of effects come from a few (approximately 20%) of the causes.
- This principle was first introduced in early 1900s and has been applied as a rule of thumb in various areas.
- Example of applying the Pareto principle:
  - 80% of the defects of a process come from 20% of the causes.
  - 80% of sales come from 20% of customers.



# Pareto Principle

---

- The Pareto principle helps us to focus on the vital few items that have the most significant impact.
- In concept, it also helps us to prioritize potential improvement efforts.
- Since this 80:20 rule was originally based upon the works of Wilfried Fritz Pareto (or Vilfredo Pareto), the Pareto principle and references to it should be capitalized because Pareto refers to a person (proper noun).
  - Mr. Pareto is also credited for many works associated with the 80:20, some more loosely than others:
    - Pareto's Law
    - Pareto efficiency
    - Pareto distribution etc.

# Pareto Charts

---

- A **Pareto chart** is a chart of descending bars with an ascending cumulative line on the top.

- **Sum or Count:**

The descending bars on a Pareto chart may be set on a scale that represents the total of all bars or relative to the biggest bucket, depending on the software you are using.

- **Percent to Total:** A Pareto chart shows the percentage to the total for individual bars.
- **Cumulative Percentage:** A Pareto chart also shows the cumulative percentage of each additional bar. The data points of all cumulative percentages are connected into an ascending line on the top of all bars.

# Pareto Charts

---

- Case study time!
  - Next we will use Minitab to run Pareto charts on exactly the same data set.
  - Open the Minitab data file labeled Pareto and follow the instructions over the next few pages to run Pareto charts in Minitab.



# Create a Pareto Chart in Minitab

---

- Steps to generate a Pareto chart using Minitab:
  1. Open the spreadsheet with the count data for individual categories.
  2. Click on Stat → Quality Tools → Pareto Chart.
  3. A new window with the title “Pareto Chart” pops up.
  4. Select “Category” into the box “Defects or attribute data in” and “Count” into the box “Frequency in.”
  5. Click “OK.”
  6. The Pareto chart is created in a newly-generated window.



# Create a Pareto Chart in Minitab


The image illustrates the steps to create a Pareto Chart in Minitab. It shows a data table with the following content:

	C1	C2-T
1	2	team1
2	12	team2
3	4	team3
4	22	team4
5	2	team5
6	2	others

The 'Pareto Chart' dialog box is shown in two states:

- Initial State:** 'Defects or attribute data in:' is empty, 'Frequencies in:' is empty, and 'BY variable in:' is empty. The 'Combine remaining defects into one category after this percent:' is set to 95.
- Final State:** 'Defects or attribute data in:' is set to 'Category', 'Frequencies in:' is set to 'Count', and 'BY variable in:' is empty. The 'Combine remaining defects into one category after this percent:' is set to 95.

# Create a Pareto Chart in Minitab

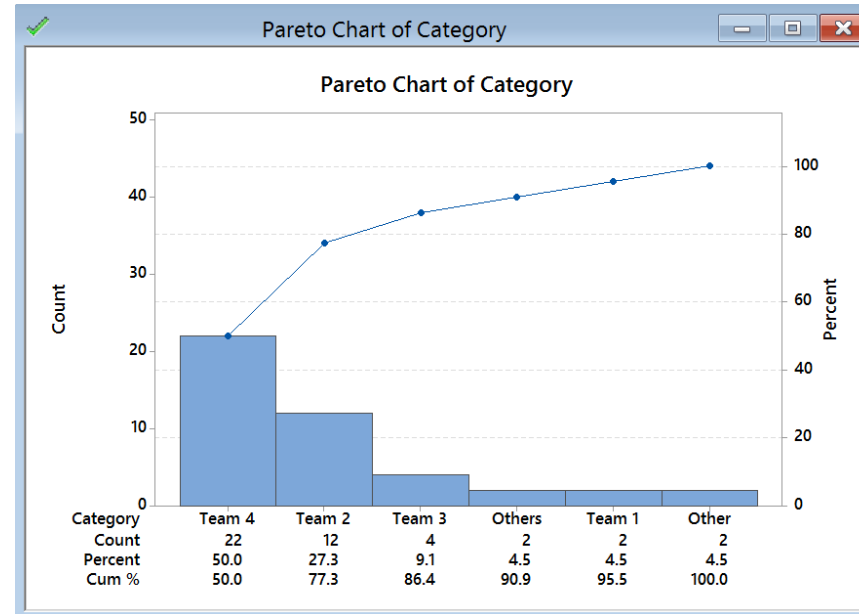

- The above Pareto chart generated in Minitab presents the count of defective products by team.
- The bars are descending on a scale with the peak at 50, which is approximately the total count of all defective products for all teams.
- The table below the chart contains counts, individual percentages, and cumulative percentages.
- The cumulative percentages are the red data points driving the red line that spans across the graphic.


# Pareto Analysis

---

- The **Pareto analysis** is used to identify the root causes by using multiple Pareto charts.
- In Pareto analysis, we drill down into the bigger buckets of defects and identify the root causes of defects that contribute heavily to total defects.
- This "drill down" approach effectively solves a significant portion of the problem.
- Next you will see an example of three-level Pareto analysis.
  - The second-level Pareto is a Pareto chart that is a subset of the tallest bar on the first Pareto.
  - The third-level Pareto is a subset of the tallest bar of the second-level Pareto.




# Pareto Analysis: First Level

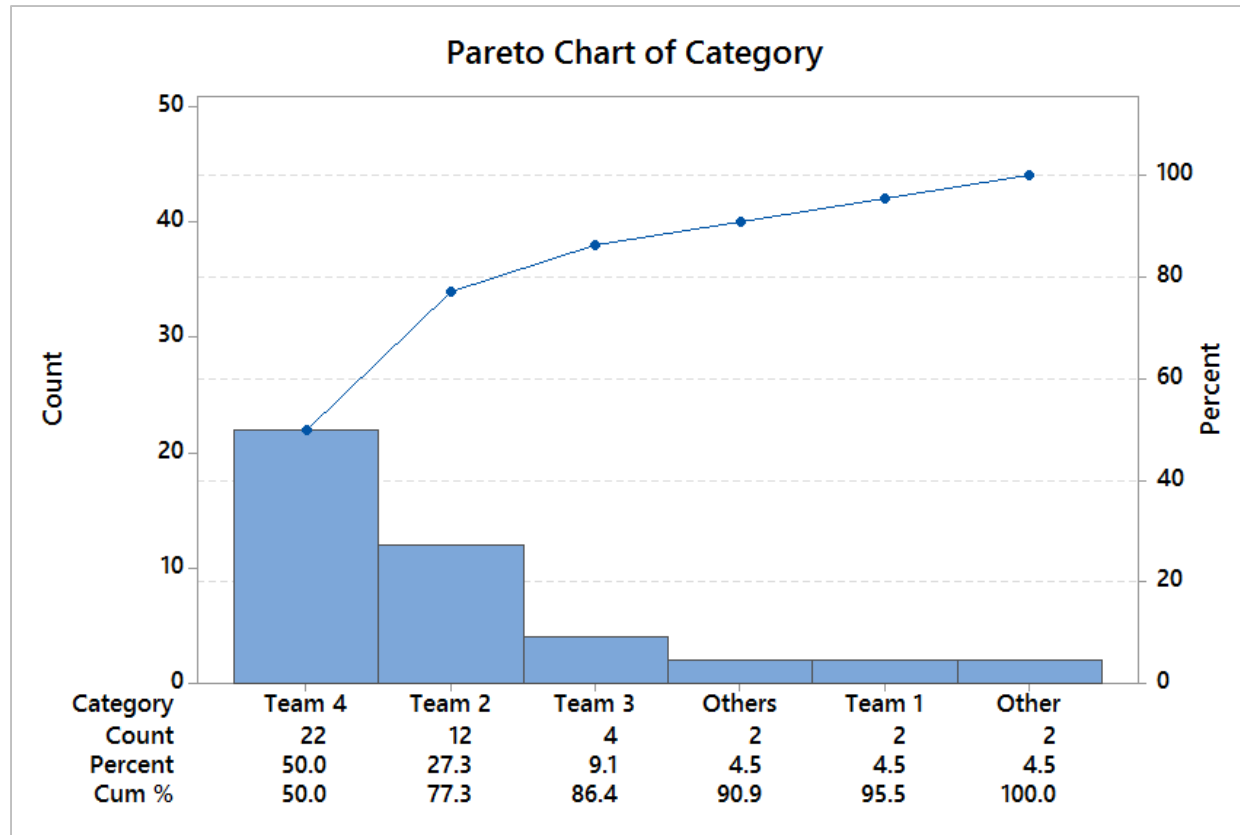

- First-level Pareto
- Shows the count of defective items by team
- Next level will only show the defective items of team 4




# Pareto Analysis: Second Level

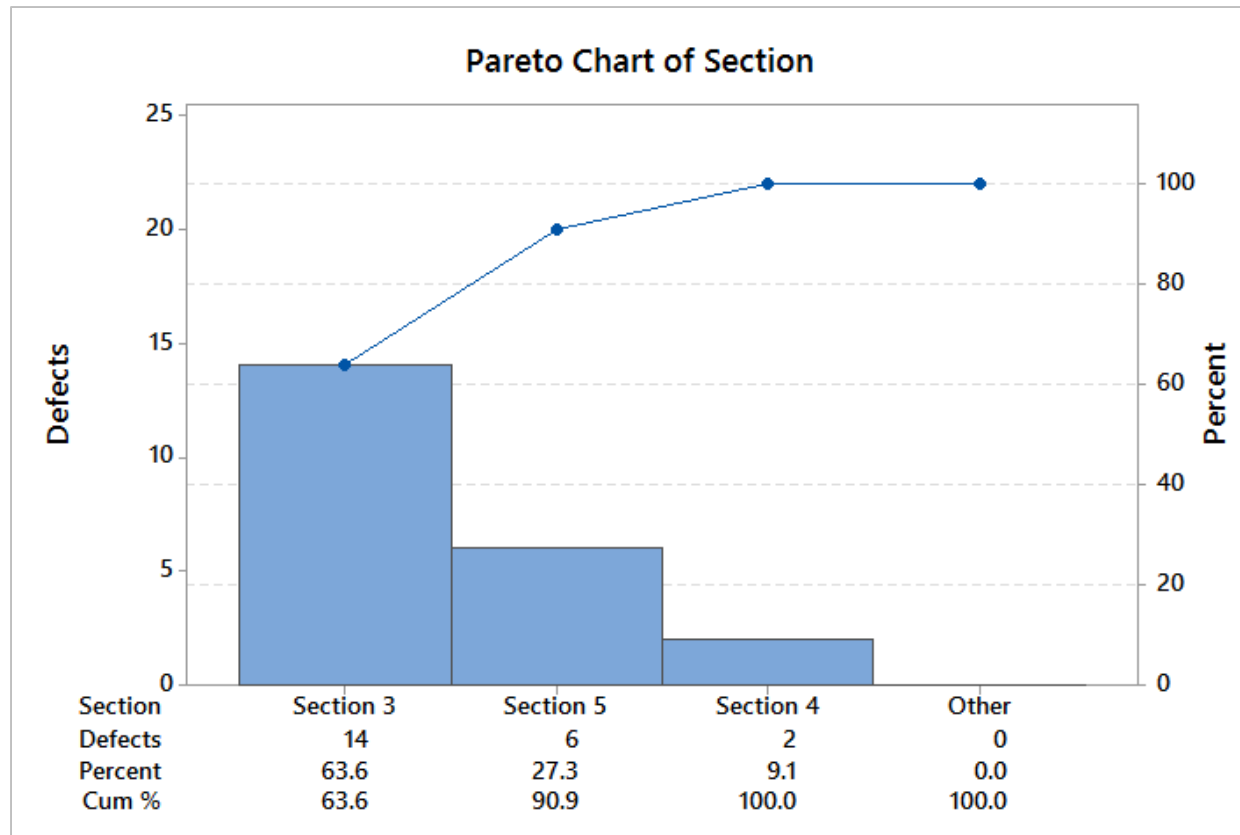

- Second-level Pareto
- Shows the count of the defective items by section for only team 4
- Next level will only show the defective items of section 3


# Pareto Analysis: Third Level

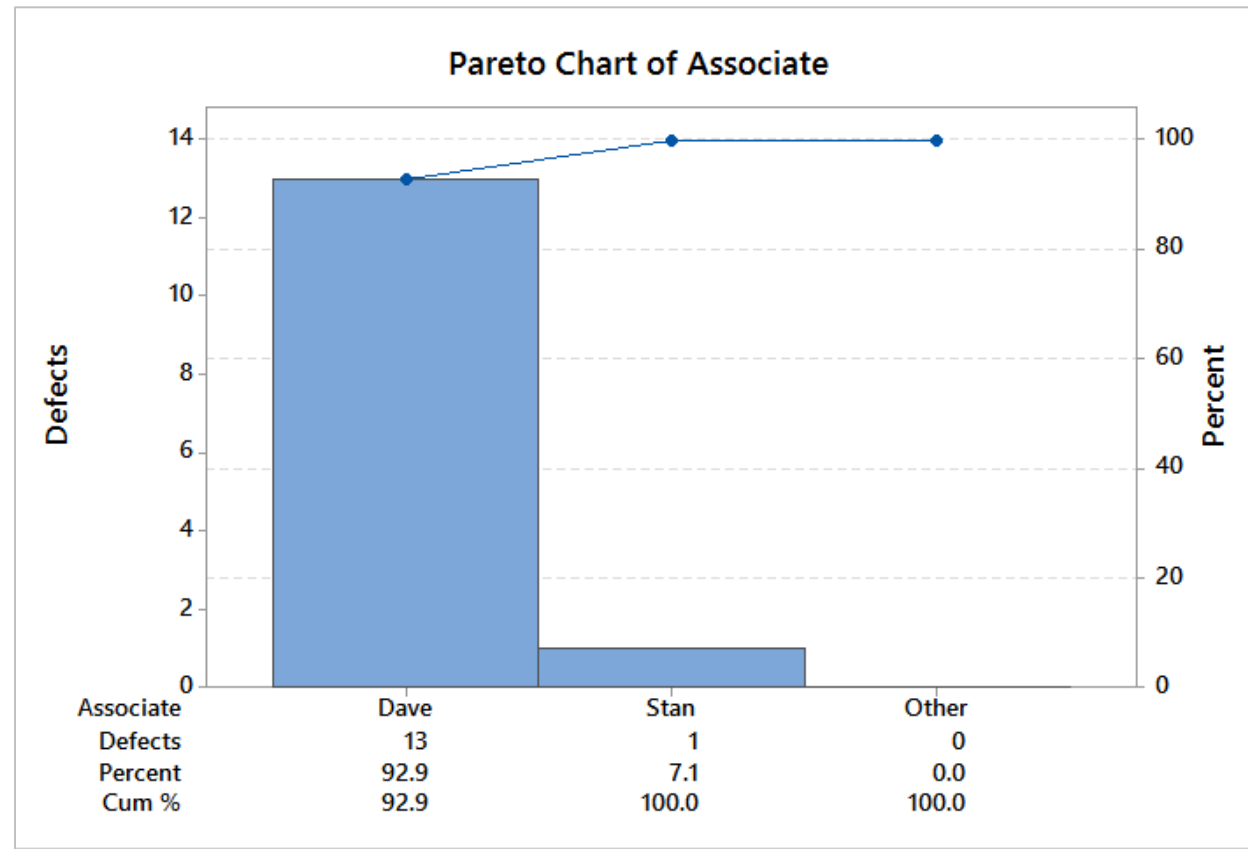

- Third-level Pareto
- Shows the count of defective items by associate for only section 3 of team 4
- Next level will only show the defective items of Dave

# Pareto Analysis: Conclusion

- After drilling down three levels we find that most of the defective products are from Dave who is in Section 3 of Team 4.
- Determining what Dave might be doing differently and solving that problem can potentially fix about 30% of the entire defective products (13/44).

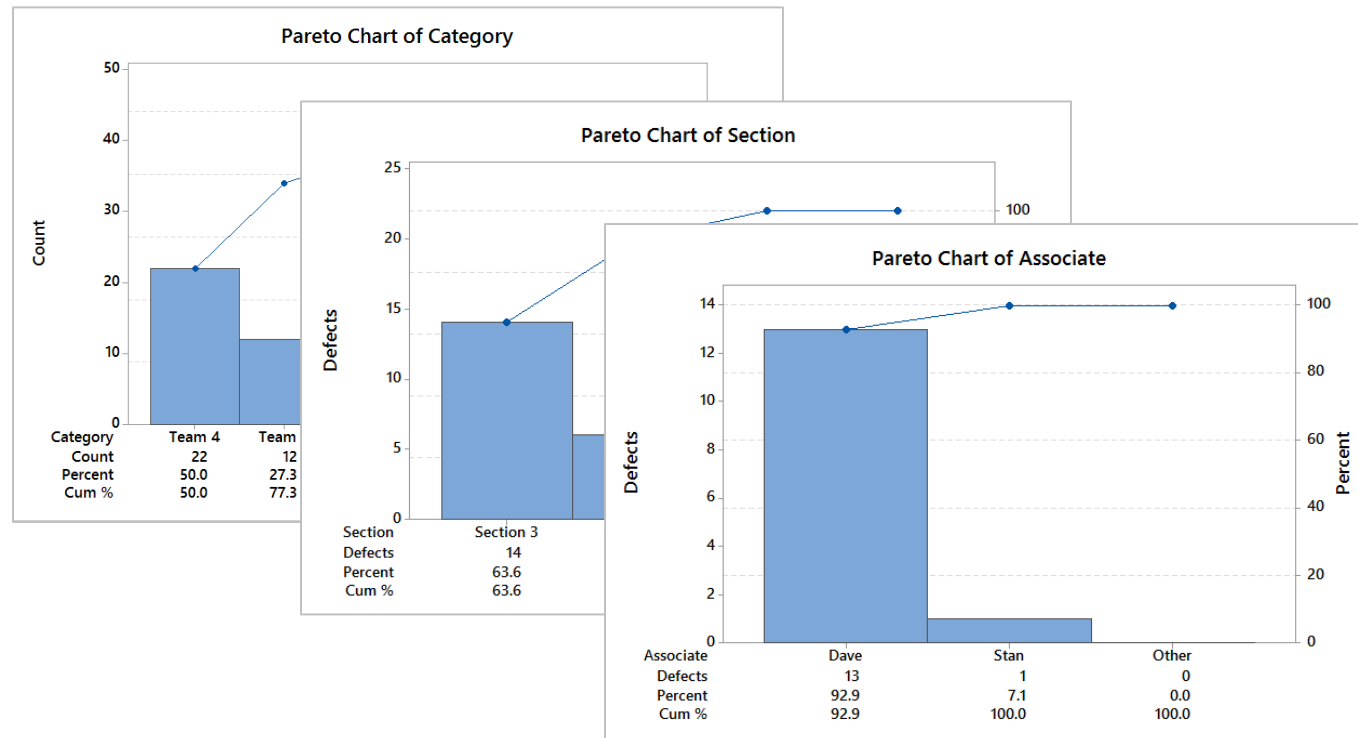

# 1.3 Six Sigma Projects



# Yellow Belt Training: Define Phase

---

## 1.1 Six Sigma Overview

- 1.1.1 What is Six Sigma
- 1.1.2 Six Sigma History
- 1.1.3 Six Sigma Approach  $Y = f(x)$
- 1.1.4 Six Sigma Methodology
- 1.1.5 Roles and Responsibilities

## 1.2 Six Sigma Fundamentals

- 1.2.1 Defining a Process
- 1.2.3 QFD
- 1.2.4 Cost of Poor Quality (COPQ)
- 1.2.5 Pareto Analysis (80:20 rule)

## 1.3 Lean Six Sigma Projects

- 1.3.1 Six Sigma Metrics
- 1.3.2 Business Case and Charter
- 1.3.3 Project Team Selection
- 1.3.4 Project Risk Management
- 1.3.5 Project Planning

## 1.4 Lean Fundamentals

- 1.4.1 Lean and Six Sigma
- 1.4.2 History of Lean
- 1.4.3 The Seven Deadly Muda
- 1.4.4 Five-S (5S)

# 1.3.1 Six Sigma Metrics



# Six Sigma Metrics

---

- There are many Six Sigma metrics and/or measures of performance used by Six Sigma practitioners.
- In addition to the ones we will cover here, several others (Sigma level, Cp, Cpk, Pp, Ppk, takt time, cycle time, utilization etc.) will be covered in other modules throughout this training.
- The Six Sigma metrics of interest here in the **define phase** are:
  - Defects per Unit (DPU)
  - Defects per Million Opportunities (DPMO)
  - Yield (Y)
  - Rolled Throughput Yield (RTY).



# Defects per Unit: DPU

---

- **DPU** stands for “Defects per Unit”
- DPU is the basis for calculating DPMO and RTY, which we will cover in the next few pages.
- DPU is found by dividing total defects by total units.
  - **$DPU = D/U$**
- For example, if you have a process step that produces an average of 65 defects for every 598 units, then your  $DPU = 65/598 = 0.109$ .



# DPMO: Defects per Million Opportunities

---

- **DPMO** is one of the few important Six Sigma metrics that you should get comfortable with if you are associated with Six Sigma.
- In order to understand DPMO it is best if you first understand both the nomenclature and the nuances such as the difference between defect and defective.
- **Nomenclature**
  - **Defects = D**
  - **Unit = U**
  - **Opportunity to have a defect = O**



# DPMO: Defects per Million Opportunities

---

- In order to properly discuss DPMO, we must first explore the differences between "defects" and "defective."
  - **Defective**
    - Defective suggests that the value or function of the entire unit or product has been compromised.
    - Defective items will always have at least one defect. Typically, however, it takes multiple defects and/or critical defects to cause an item to be defective.
  - **Defect**
    - A defect is an error, mistake, flaw, fault, or some type of imperfection that reduces the value of a product or unit.
    - A single defect may or may not render the product or unit "defective" depending on the specifications of the customer.
  - **Summary**
    - Defect means that part of a unit is bad.
    - Defective means that the whole unit is bad.



# DPMO: Defects per Million Opportunities

---

- Now let us turn our attention to defining "opportunities" so that we can fully understand Defects per Million Opportunities (DPMO).
  - **Opportunities**
    - Opportunities are the total number of possible defects.
    - Therefore, if a unit has 6 possible defects, then each unit produced is equal to 6 defect opportunities.
    - If we produce 100 units, then there are 600 defect opportunities.



# DPMO: Defects per Million Opportunities

---

- Calculating Defects per Million Opportunities
- **The equation is  $DPMO = (D / (U \times O)) \times 1,000,000$**
- Example: Let us assume:
  - There are 6 defect opportunities per unit
  - There are an average of 4 defects every 100 units.
- Opportunities =  $6 \times 100 = 600$
- Defect rate =  $4/600$
- $DPMO = 4/600 \times 1,000,000 = 6,667$



# DPMO: Defects per Million Opportunities

---

- **What is the reason or significance of 1,000,000?**
- Converting defect rates to a per million value becomes necessary when the performance of your process approaches Six Sigma.
- When this happens, the number of defects shrinks to virtually nothing. In fact, if you recall from the “What is Six Sigma” module, sigma is 3.4 defects per million opportunities.
- By using 1,000,000 opportunities as the barometer we have the resolution in the measurement to count defects all the way up to Six Sigma.



# RTY: Rolled Throughput Yield

---

- **Rolled Throughput Yield (RTY)** is a process performance measure that provides insight into the cumulative effects of an entire process.
- RTY measures the yield for each of several process steps and provides the probability that a unit will come through that process defect-free.
- RTY allows us to expose the "hidden factory" by providing visibility into the yield of each process step.
- This helps us identify the poorest performing process steps and gives us clues into where to look to find the most impactful process improvement opportunities.

# RTY: Rolled Throughput Yield

- **Calculating RTY:**
- RTY is found by multiplying the yields of each process step.
- Let us take the 5-step process below and calculate the RTY using the multiplication method mentioned above.



- The calculation is:  $RTY = 0.90 \times 0.91 \times 0.99 \times 0.98 \times 0.97 = 0.77$
- Therefore,  $RTY = 77\%$ .

# RTY: Rolled Throughput Yield

---

- You may have noticed that in order to calculate RTY we must determine the yield for each process step.
- Before we get into calculating yield, there are a few abbreviations that need to be declared.
  - Abbreviations
    - Defects = **D**
    - Unit = **U**
    - Defects per Unit = **DPU**
    - Yield = **Y**
    - $e = 2.71828$  (*mathematical constant*)





# RTY: Rolled Throughput Yield

---

- **Calculating Yield**

- The **yield** of a process step is the success rate of that step or the probability that the process step produces no defects.
- In order to calculate the yield, we need to know the DPU and then we can apply it to the yield equation below.


$$Y = e^{-dpu}$$

- **Example**

- Let us assume a process step has a DPU of 0.109 (65/598)

$Y = 2.718^{-0.109} = 0.8967$ . Rounded,  $Y = 90\%$ .

# RTY: Rolled Throughput Yield

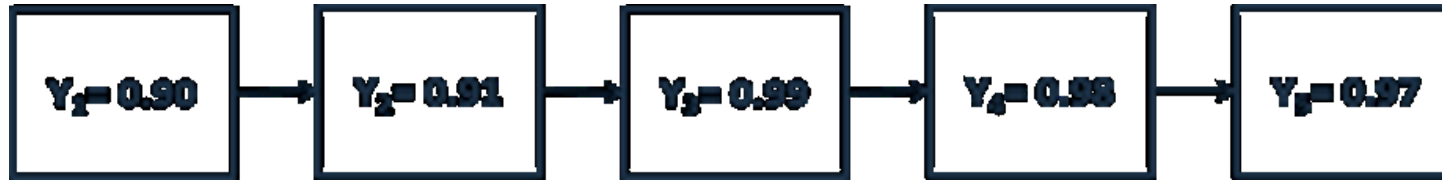

- Below is a table using the above process yield data that we used in the earlier RTY calculation.
- This table allows us to see the DPU and yield of each step as well as the RTY for the whole process.

Process Step	Defects	Units	DPU	Yield	RTY
1	65	598	0.10870	0.89701	0.90
2	48	533	0.09006	0.91389	0.82
3	5	485	0.01031	0.98974	0.81
4	10	480	0.02083	0.97938	0.79
5	14	471	0.02972	0.97072	0.77

# RTY: Using an Estimate of Yield

Process Step	Defects	Units	DPU	Yield	RTY
1	65	598	0.10870	0.89701	0.90
2	48	533	0.09006	0.91389	0.82
3	5	485	0.01031	0.98974	0.81
4	10	480	0.02083	0.97938	0.79
5	14	471	0.02972	0.97072	0.77

- Calculating RTY using **yield estimation**

- It is possible to “estimate” yield by taking the inverse of DPU or simply subtracting DPU from 1.

- Yield Estimation =  $1 - \text{DPU}$

- Yield Estimate for process step 1:  $1 - 0.10870 = 0.90$
- Yield Estimate for process step 2:  $1 - 0.09006 = 0.91$
- Yield Estimate for process step 3:  $1 - 0.01031 = 0.99$
- Yield Estimate for process step 4:  $1 - 0.02083 = 0.98$
- Yield Estimate for process step 5:  $1 - 0.02972 = 0.97$

- RTY using the Yield Estimation Method

- $\text{RTY} = 0.90 \times 0.91 \times 0.99 \times 0.98 \times 0.97 = 0.77 = 77\%$



## 1.3.2 Business Case and Charter



# Business Case and Project Charter

---

- Earlier we stated that DMAIC is a structured and rigorous methodology designed to be repeatedly applied to any process in order to achieve Six Sigma.
- We also stated that DMAIC was a methodology that refers to 5 phases of a project.
  - Define, Measure, Analyze, Improve, and Control
- Given that the premise of the DMAIC methodology is project-based, we must take the necessary steps to define and initiate a project, hence the need for. . .
  - **Project Charters**




# Project Charter

---

- The purpose of a **project charter** is to provide vital information about a project in a quick and easy-to-comprehend manner.
- Project charters are used to get approval and buy-in for projects and initiatives as well as declaring:
  - The scope of work
  - Project teams
  - Decision authorities
  - Project lead
  - Success measures



# Project Charter

		Organization	
		Line of Business	
		Project Sponsor	
Project Name			
<b>Project</b>	Name of project		
<b>Project Lead</b>	Name of Black Belt	<b>Date</b>	Date of charter review
<b>Phone10/15/2010</b>	Black Belt Contact Info	<b>Email</b>	Black Belt Contact Info
<b>Business Case</b>	<ul style="list-style-type: none"> <li>A good business case discusses the problem why it's a problem why it's important or why the business cares about the problem</li> <li>Business cases should incorporate:                             <ul style="list-style-type: none"> <li>Quantifiable references to the problem in terms that the business cares about (Cost, Speed, Accuracy, Quality, Satisfaction etc.)</li> <li>Background or history, anything deemed relevant regarding the problem</li> <li>Implications of not addressing the problems</li> <li>Actions and/or results that might have previously been employed to resolve the problem</li> </ul> </li> </ul>		
<b>Problem Statement</b>	<ul style="list-style-type: none"> <li>A problem statement should touch on 5 elements:                             <ol style="list-style-type: none"> <li>Baseline: (where is the primary metric today)</li> <li>Goal: (where should the metric be)</li> <li>Gap: (difference between goal &amp; baseline)</li> <li>COPQ: (cost of poor quality; the "value" of the gap)</li> <li>Time: (estimate of time required to close the gap)</li> </ol> </li> <li>Problem statements are clear, brief and quantifiable – get to the point and stay focused!</li> </ul> <p><i>Example: Production line "A" outputs 5 pieces per min with a goal of 9. This is a gap of 4 pieces per min at COPQ of \$8/min. This project will reduce the gap by 50% bringing output to 7 pieces per min, saving \$4 per min by the end of Q1 2011.</i></p>		
<b>Project Objective</b>	Summarize the goal of the project (be concise, and quantifiable)		
<b>Primary Metric</b>	Explain the primary metric, how it's calculated and how frequently it's measured. Put it into a run chart or time series graphic. Show it and track it over time.		
<b>Secondary Metric</b>	Like the Primary, explain the secondary metric, how it's calculated and how frequently it's measured. Put it into a run chart or time series graphic. Show it and track it over time – Remember, the secondary is there to keep you and your project honest, it's keeps the primary in check.		
<b>High Level Timeline</b>	Estimate the (DMAIC project phases) in a timeline		
<b>Project Scope</b>	Define what's in and out of scope		
<b>Project Team</b>	Identify the working project team		
<b>Stakeholders</b>	Identify who's affected by this project		
<b>Approvers</b>	Define who has approval authority and/or veto rights – this is the steering committee, board, council etc.		
<b>Constraints</b>	Identify & state expected constraints (time, human resources, capital resources, compliance policies, federal regulations etc.)		
<b>Dependencies</b>	Identify & state project dependencies or critical path items		
<b>Risks</b>	Identify & state project risks, brand risks, financial, litigation risks etc.		

## • Key Elements of Project Charters

- Title
- Project Lead
- Business Case
- Problem Statement
- Project Objective
- Primary and Secondary Metrics
- Project Scope
- Project Timeline
- Project Constraints
- Project Team
- Stakeholders
- Approvers
- Constraints
- Dependencies
- Risks



# Project Charter: Key Elements

---

- Title
  - Projects should have a name, title, or some reference that identifies them.
  - Branding can be an important ingredient in the success of a project so be sure your project has a reference name or title.
- Leader
  - Any projects needs a declared leader or someone who is responsible for project's execution and success.
  - You may hear references to RACI throughout in your Six Sigma journey.
  - **RACI** stands for **R**esponsible, **A**ccountable, **C**onsulted, **I**nformed and identifies the people that play those roles.
  - Every project must have declared leaders indicating who is responsible and who is accountable.





# Project Charter: Key Elements

---

- Business Case
  - A **business case** is the quantifiable reason why the project is important.
  - Business cases help shed light on problems. They explain why a business should care.
  - Business cases must be quantified and stated succinctly.
  - COPQ is a key method of quantification for any business case.



# Project Charter: Key Elements

---

- Problem Statement and Objective
  - A properly written problem statement has an objective statement woven into it.
  - There should be no question as to the current state or the goal.
  - A gap should be declared, the gap being the difference between the present state and the goal state.
  - The project objective should be to close the gap or reduce the gap by some reasonable amount.
  - Valuation or COPQ is the monetary value assigned to the gap.
  - Lastly, a well-written problem statement refers to a timeline expected to be met.



# Project Charter: Problem Statement Examples

---

- Currently, process defect rates are 17% with a goal of 2%. This represents a gap of 15%, costing the business \$7.4 million dollars. The goal of this project is to reduce this gap by 50% before Nov 2010 putting process defect rates at 9.5% and saving \$3.7MM.
- Process cycle time has averaged 64 minutes since Q1 2009. However, production requirements put the cycle time goals at 48 min. This 16-min gap is estimated to cost the business \$296,000. The goal of this project is reduce cycle time by 16 min. by Q4 2010 and capture all \$296,000 cost savings.

# Project Charter: Key Elements

---

- Metrics
  - A measure of success is an absolute for any project.
  - Metrics give clarity to the purpose of the work.
  - Metrics establish how the initiative will be judged.
  - Metrics establish a baseline or “starting point.”
  - For Six Sigma projects...**metrics are mandatory!**



# Project Charter: Key Elements

---

- Primary Metric
  - The **primary metric** is a generic term for a Six Sigma project's most important measure of success. The primary metric is defined by the Black Belt, GB, MBB, or Champion.
  - A primary metric is an absolute MUST for any project and it should not be taken lightly. Here are a few characteristics of good primary metrics.
  - Primary metrics should be:
    - tied to the problem statement
    - measureable
    - expressed with an equation
    - aligned to business objectives
    - tracked at the proper frequency (hourly, daily, weekly, monthly etc.)
    - expressed pictorially over time with a run chart, time series, or control chart
    - validated with an MSA.



# Project Charter: Key Elements

---

- The primary metric is the reason for your work.
- It is the success indicator.
- It is your beacon.
- The primary metric is of utmost importance and should be improved, **but** not at the expense of your secondary metric.

# Project Charter: Key Elements

---

- Secondary Metric
  - The **secondary metric** is the thing you do not want sacrificed on behalf of a primary improvement.
  - A secondary metric is one that makes sure problems are not just "changing forms" or "moving around."
  - The secondary metric keeps us honest and ensures we are not sacrificing too much for our primary metric.
  - If your primary metric is a cost or speed metric, then your **secondary metric** should probably be some quality measure.
    - Example: If you were accountable for saving energy in an office building and your primary metric was energy consumption then you *could* shut off all the lights and the HVAC system and save tons of energy. . .except that your secondary metrics are probably comfort and functionality of the work environment.



# Project Charter: Key Elements

---

- Elements of a Good Project Charters *(continued)*
  - Scope Statement – defined by high-level process map
  - Stakeholders Identified – who is affected by the project
  - Approval Authorities Identified – who makes the final call
  - Review Committees Defined – who is on the review team
  - Risks and Dependencies Highlighted – identify risks and critical path items
  - Project Team Declared – declare team members
  - Project Timeline Estimated – set high-level timeline expectations.





# 1.3.3 Project Team Selection



# Project Team Selection

---

- Six Sigma project team selection is the cornerstone of a successful Six Sigma project.
- Teams and Team Success
  - A **team** is a group of people who share complementary skills and experience.
  - A team will be dedicated to consistent objectives.
  - Winning teams share similar and coordinated goals.
  - Teams often execute common methods or approaches.
  - Team members hold each other accountable for achieving shared goals.



# Project Team Selection

---



- What makes a team successful?
  - Shared goals
  - Commitment
  - Leadership
  - Respect
  - Effective communication
  - Autonomy
  - Diversity (capabilities, knowledge, skills, experience etc.)
  - Adequate resources.

# Project Team Selection

---

- Keys to Team Success
  - Agreed focus on the goal or the problem at hand
    - Focus on problems that have meaning to the business
    - Focus on solvable problems within the scope of influence; a successful team does not seek unattainable solutions.
  - Team Selection
    - Selected teammates have proper skills and knowledge
    - Adequately engaged management
    - Appropriate support and guidance from their direct leader
  - Successful teams use reliable methods
    - Follow the prescribed DMAIC methodology
    - Manage data, information, and statistical evidence
  - Successful teams always have exceeds players
    - Winning teams typically
      - Have unusually high standards.
      - Have greater expectations of themselves and each other.
      - Do not settle for average or even above average results.



# Project Team Selection

---

- Principles of Team Selection:
  - Select team members based on
    - Skills required to achieve the objective
    - Experience (Subject Matter Expertise)
    - Availability and willingness to participate
    - Team size (usually 4–8 members)
      - Don't go at it alone!
      - Don't get too many cooks in the kitchen!
    - Members' ability to navigate
      - The process
      - The company
      - The political landscape
  - Be sure to consider the inputs of others
    - Heed advice
    - Seek guidance



# Project Team Development

---

- All teams experience the following four stages of development. It is helpful to understand these phases so that you can anticipate what your team is going to experience.
- The four stages of team development process:
  - Forming
  - Storming
  - Norming
  - Performing
- Teammates seek something different at each stage:
  - In the forming stage they seek inclusion
  - In the storming stage they seek direction and guidance
  - In the norming stage they seek agreement
  - In the performing stage they seek results.



# Project Team Development

---

- Patterns of a team in the **Forming** stage:
  - Roles and responsibilities are unclear
  - Process and procedures are ignored
  - Scope and parameter setting is loosely attempted
  - Discussions are vague and frustrating
  - There is a high dependence on leadership for guidance
- Patterns of a team in the **Storming** stage:
  - Attempts to skip the research and jump to solutions
  - Impatience for some team members regarding lack of progress
  - Arguments about decisions and actions of the team
  - Team members establish their position
  - Subgroups or small teams form
  - Power struggles exist and resistance is present



# Project Team Development

---

- Patterns of a team in the **Norming** stage:
  - Agreement and consensus start to form
  - Roles and responsibilities are accepted
  - Team members' engagement increases
  - Social relationships begin to form
  - The leader becomes more enabling and shares authority
- Patterns of a team in the **Performing** stage:
  - Team is directionally aware and agrees on objectives
  - Team is autonomous
  - Disagreements are resolved within the team
  - Team forms above average expectations of performance





# Project Team Development

---

- Well-structured and energized project teams are the essential components of any successful Six Sigma project.
- To have better chances of executing the project successfully, you will need to understand and effectively manage the team development process.



# 1.3.4 Project Risk Management



# Risk

---

**Risk** is defined as a future event that *can* impact the task/project if it occurs.



# What is Project Risk Management?

---

- The main purpose of **risk management** is to foresee potential risks that may inhibit the project deliverables from being delivered on time, within budget, and at the appropriate level of quality, and then to mitigate these risks by creating, implementing, and monitoring *contingency plans*.
- Risk management is concerned with identifying, assessing, and monitoring project risks before they develop into issues and impact the project.
- **Risk analysis** helps to identify and manage potential problems that could impact key business initiatives or project goals.

# Three Basic Parameters of Risk Analysis

---

- **Risk Assessment:**  
The process of identifying and evaluating risks, whether in absolute or relative terms.
- **Risk Management:**  
Project risk management is the effort of responding to risks throughout the life of a project and in the interest of meeting project goals and objectives.
- **Risk Communication:**  
Communication plays a vital role in the risk analysis process because it leads to a good understanding of risk assessment and management decisions.

# Why is Risk Analysis Necessary?

---

What can happen if you omit the risk analysis?

- Vulnerabilities cannot be detected
- Mitigation plans are introduced without proper justification
- Customer dissatisfaction
- Not meeting project goals
- Remake the whole system
- Huge cost and time loss



# Project Risk Analysis Steps

---

The project risk analysis process consists of the following steps that evolve through the life cycle of a project.

- **Risk Identification:**
  - Identify risks and risk categories, group risks, and define ownership.
- **Risk Assessment:**
  - Evaluate and estimate the possible impacts and interactions of risks.
- **Response Planning:**
  - Define mitigation and reaction plans.
- **Mitigation Actions:**
  - Implement action plans and integrate them into the project.
- **Tracking and Reporting:**
  - Provide visibility to all risks.
- **Closing:**
  - Close the identified risk.




# Risk Identification

---

The first action of risk management is the identification of individual events that the project may encounter during its lifecycle.

The identification step comprises:

- Identify the risks
- Categorize the risks
- Match the identified risks to categories
- Define ownership for managing the risks.





# Risk Identification

---

- Source of Risk:
- Identification of risk sources provides a basis for systematically examining changing situations over time to uncover circumstances that impact the ability of the project to meet its objectives.

# Risk Identification

Source of Risk	Description
<b>Human Resources</b>	The risks originated from human resources (e.g., availability, skill etc.)
<b>Physical Resources</b>	The risks originated from physical resources (e.g., hardware or software, availability of the required number at the right time etc.)
<b>Technology</b>	The risks originated from technology (e.g., development environment, new or complex technologies, performance requirements, tools etc.)
<b>Suppliers</b>	The risks are associated with a supplier (e.g., delays in supplies, capability of suppliers etc.)
<b>Customer</b>	The risks derived from the customer (e.g., unclear requirements, requirement volatility, change in project scope, delays in response etc.)
<b>Security</b>	The risks are associated with information security, security of personnel, security of assets, and security of intellectual property
<b>Legal</b>	The risks are associated with legal issues that may impact the project
<b>Project management</b>	The risks are associated with project management processes, organizational maturity, and ability



# Risk Identification

---

## Risk Parameters:

Parameters for evaluating, categorizing, and prioritizing risks include the following:

- Risk likelihood (i.e., probability of risk occurrence)
- Risk consequence (i.e., impact and severity of risk occurrence)
- Thresholds to trigger management activities.

# Risk Assessment

---

The **risk assessment** consists of evaluating the range of possible impacts should the risk occur.

Follow these steps when assessing risks:

- 1) Define the various impacts of each risk
- 2) Rate each impact based on a logical severity level
- 3) Sort and evaluate risks by severity level
- 4) Determine if any controls already exist
- 5) Define potential mitigation actions.

# Risk Mitigation Planning

---

The risk owners are responsible for planning and implementing mitigation actions with support from the project team.

- All team members, inclusive of partners and suppliers, may be requested to identify and develop mitigation measures for identified risks.
- The project core team members are responsible for identifying an appropriate action owner for each identified risk.
- After mitigation actions are defined, the project core team will review the actions.
- The risk owner must track all mitigation actions and expected completion dates.
- The risk owner and the project core team members must hold all action owners accountable for the risk mitigation planning.



# Risk Mitigation Action Implementation

---

- The **action implementation** is the responsibility of the risk owner.
- The action owners are responsible for the execution of the tasks or activities necessary to complete the mitigation action and eliminate or minimize the risk.
- The risk owner or the project manager will monitor completion dates of the mitigation action implementation.



# Risk Occurrence and Contingency Plans

---

- Whenever any risk occurs, the project team should implement **contingency plans** to ensure that project deliverables can be met.
- The details of each occurrence should be recorded in the risk register or other tracking tool.
- The **risk register** or **risk management plan** (*see next slide*) will be maintained by the project manager and reviewed on a regular basis.



# Risk Tracking and Reporting

- **Risk tracking and reporting** provides critical visibility to all risks.
- Risk owners must report on the status of their mitigation actions.
- Depending on the risk severity, project managers need to report the risk status of each category of risk to senior management.

*This template is available in the “Lean Sigma Corporation Templates.xls” file*

LEAN SIGMA CORPORATION		Risk Management Plan					
Company		Project/Program Name	Project Lead	Project Sponsor/Champion		Last Updated	
Risk ID	Risk Category	Risk Description	Risk Impact	Impact Rating	Mitigation Action	Responsible	Status





# Risk Closure

---

- The risk owners are responsible for recommending the risk closure to the project manager.
- A risk is *closed* only when the item is not considered a risk to the project anymore.
- When a risk is closed, the project manager needs to update the risk status in the lessons learned document.

# Risk Analysis Features

---

The risk analysis should be:

- Systematic
- Comprehensive
- Data driven
- Adherent to evidence
- Logically sound
- Practically acceptable
- Open to critique
- Easy to understand.



# Project Risk Analysis Advantages

---

- Helps strategic and business planning
- Meets customer requirements
- Reduces schedule slips and cost overruns
- Promotes an effective usage of resources
- Promotes continuous improvement
- Helps to achieve project goals
- Minimizes surprises from customers and stakeholders
- Allows a quick grasp of new opportunities
- Enhances communication
- Reassures stakeholders that the project stays on track.



# 1.3.5 Project Planning



# What is Project Management?

---

- **Project management** is the process of defining, planning, organizing, managing, leading, securing, and optimizing the resources to achieve a set of planned goals and objectives.
- It is the application of knowledge, skills, tools, and techniques to project activities in order to meet project requirements.



# What is a Project Plan?

---

- A **project plan** is a crucial step in project management for achieving a project's goals.
- A project plan is a formal approved document used to guide and execute project tasks.
- It provides an overall framework for managing project tasks, schedules, and costs.
- A project plan is a coordinating tool and communication device that helps teams, contractors, customers, and organizations define the crucial aspects of a project or program.

# Project Planning Stages

---

- 1. Determine project scope and objectives:** Explore opportunities, identify and prioritize needs, consider project solutions.
- 2. Plan the project:** Identify input and resources requirements such as human resources, materials, software, hardware, and budgets.
- 3. Prepare the project proposal:** Based on stakeholder feedback, plan the necessary resources, timeline, budget etc.
- 4. Implement the project:** Implement the project by engaging responsible resources and parties. Ensure execution and compliance of the defined plans.
- 5. Evaluate the project:** Regularly review progress and results. Measure the project's effectiveness against *quantifiable* requirements.



# Planning and Scheduling Objectives

---

- To optimize the use of resources (both human and other resources).
- To increase productivity.
- To achieve desired schedules and deliverables.
- To establish an approach to minimize long-term maintenance costs.
- To minimize the chaos and productivity losses resulting from planned production schedules, priority changes, and non-availability of resources.
- To assess current needs and future challenges.





# Project Planning Activities

---

- Statement of work (SOW)
- Work breakdown structure (WBS)
- Resource estimation plan
- Project schedule
- Budget or financial plan
- Communication plan
- Risk management plan



# Project Planning Activities: SOW

**Statement of Work (SOW)** is a formal document often accompanying a contract that outlines specific expectations, limitations, resources and work guidelines intended to define the work or project.

## SOW's:

- Define the scope of the project.
- Establish expectations and parameters of the project.
- Identify technical requirements for the project.
- Provide guidance on materials to be used.
- Establish timeline expectations.
- Etc.




# Project Planning Activities: WBS

---

**Work Breakdown Structure (WBS)** is a decomposition of project components into small and logical bodies of work or tasks.

Work Breakdown Structures:

- Identify all required components of a project.
- Cascades components into sub-components and tasks.
- WBS's are not by themselves project plans or schedules but they are a necessary step to help establish project plans and timelines.
- WBS's also enable logical reporting and summarizations of project progress

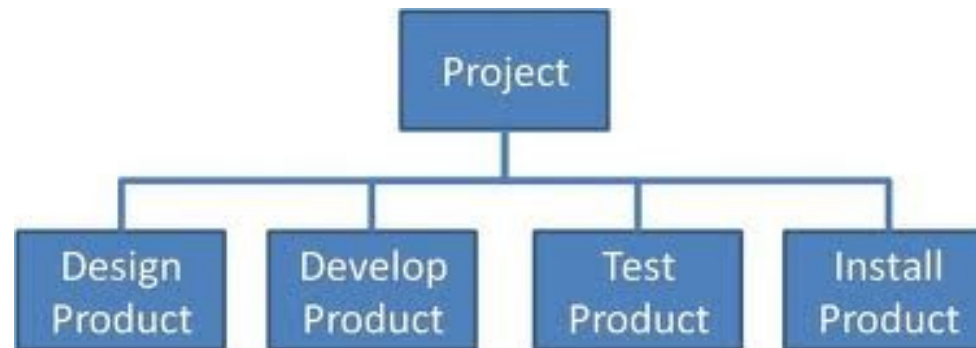

# Project Planning Activities: WBS

**Work Breakdown Structure Example:** below is an example of a WBS for the assembly of a bicycle.

Level 1	Level 2	Level 3
1.0 Bicycle	1.1 Frame	1.1.1 Set Body Frame
		1.1.2 Assemble Handlebars
		1.1.3 Install Seat & Seat Post
		1.1.4 Assemble Wheel Bearings & Axle
		1.1.5 Install Wheels
		1.1.6 Attach Brake System to Frame Set
	1.2 Wheels	1.2.1 Stage Rims
		1.2.2 Install Spokes
		1.2.3 Insert Tubes in Tires
		1.2.4 Assemble Tires on Rims
		1.2.5 Install Reflectors
	1.3 Brake System	1.3.1 Connect Brake Cables To Hand Levers
		1.3.2 Connect Brake Cables to Brake Harness
		1.3.3 Attach Brake Pads to Brake Harness
		1.3.4 Adjust/Calibrate Brake System

# Project Planning Activities: Resource Planning

## Resource Estimation Plan

- Estimate Resource Requirements (Use Your WBS)
  - Parts, Hardware, Software, Human Resources etc.
- Plan resources
  - Establish who is responsible for what and when.
  - Determine quantity requirements and delivery dates etc.

Level 3	Parts Required	Quantity	Cost	Part Inventory	Responsible
1.1.1 Set Body Frame	Body Frame	1	\$9.00	4	John
1.1.2 Assemble Handlebars	Handlebars	1	\$4.00	4	John
1.1.3 Install Seat & Seat Post	Seat & Post	1 Each	\$3.00	4 Each	John
1.1.4 Assemble Wheel Bearings & Axle	Bearing & Axle	2 Each	\$1.00	8 Each	John
1.1.5 Install Wheels	Wheels	2	\$0.50	8	John
1.1.6 Attach Brake System to Frame Set					John
1.2.1 Stage Rims	Wheel Rim	2	\$0.30	12	Cathy
1.2.2 Install Spokes	Spokes	48	\$0.03	72	Cathy
1.2.3 Insert Tubes in Tires	Tubes & Tires	2 Each	\$0.33	0 Tubes 8 Tires	Cathy
1.2.4 Assemble Tires on Rims					Cathy
1.2.5 Install Reflectors	Reflectors	4	\$0.10	18	Cathy
1.3.1 Connect Brake Cables To Hand Levers	Cables & Levers	2 Each	\$0.90	12 Each	Lisa
1.3.2 Connect Brake Cables to Brake Harness	Brake Harness	2	\$0.40	8	Lisa
1.3.3 Attach Brake Pads to Brake Harness	Brake Pads	4	\$0.15	12	Lisa
1.3.4 Adjust/Calibrate Brake System					Lisa



# Project Planning Activities: Project Scheduling

## Project Scheduling:

- Assign beginning times to each activity in the WBS (days are used for start and durations times in example below).
- Assign duration times to each activity in the WBS.
- Identify People Responsible and set completion dates.
- Represent schedules as Gantt charts or network diagrams.
- Identify critical dependencies between tasks.


Level 2	Level 3	Task Start	Task Duration	Responsible
1.1 Frame	1.1.1 Set Body Frame	0	2	John
	1.1.2 Assemble Handlebars	2	2	John
	1.1.3 Install Seat & Seat Post	4	2	John
	1.1.4 Assemble Wheel Bearings & Axle	6	4	John
	1.1.5 Install Wheels	14	4	John
	1.1.6 Attach Brake System to Frame Set	18	3	John
1.2 Wheels	1.2.1 Stage Rims	0	1	Cathy
	1.2.2 Install Spokes	1	7	Cathy
	1.2.3 Insert Tubes in Tires	10	2	Cathy
	1.2.4 Assemble Tires on Rims	12	2	Cathy
	1.2.5 Install Reflectors	8	2	Cathy
1.3 Brake System	1.3.1 Connect Brake Cables To Hand Levers	0	8	Lisa
	1.3.2 Connect Brake Cables to Brake Harness	8	8	Lisa
	1.3.3 Attach Brake Pads to Brake Harness	16	2	Lisa
	1.3.4 Adjust/Calibrate Brake System	21	2	Lisa



# Project Planning Activities: Project Scheduling

## Project Schedule – Gantt Chart:

- The advantage of a Gantt chart is its ability to display the status of each task/activity at a glance.
- Because it is a graphic representation, it is easy to demonstrate the schedule of tasks and timelines to all the stakeholders.

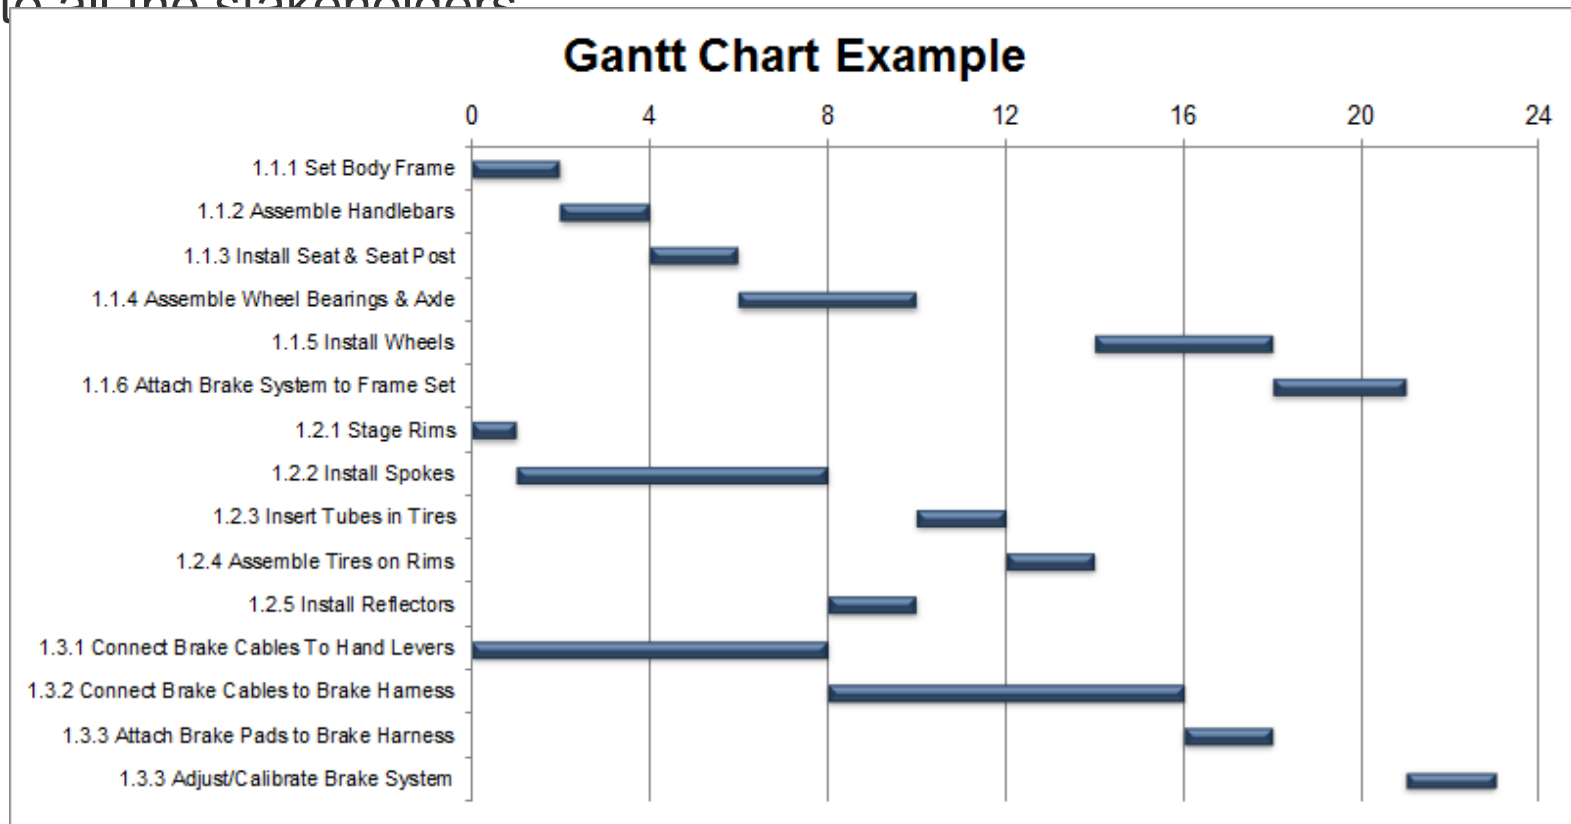




# Project Scheduling: Preparing a Gantt Chart in Excel

There are many tools available to create Gantt charts. Some of the most common and compatible for businesses are: Microsoft Project, Visio and Excel. In Microsoft Excel we use the bicycle example:

1. Select rows & columns of your tasks, start times and durations.

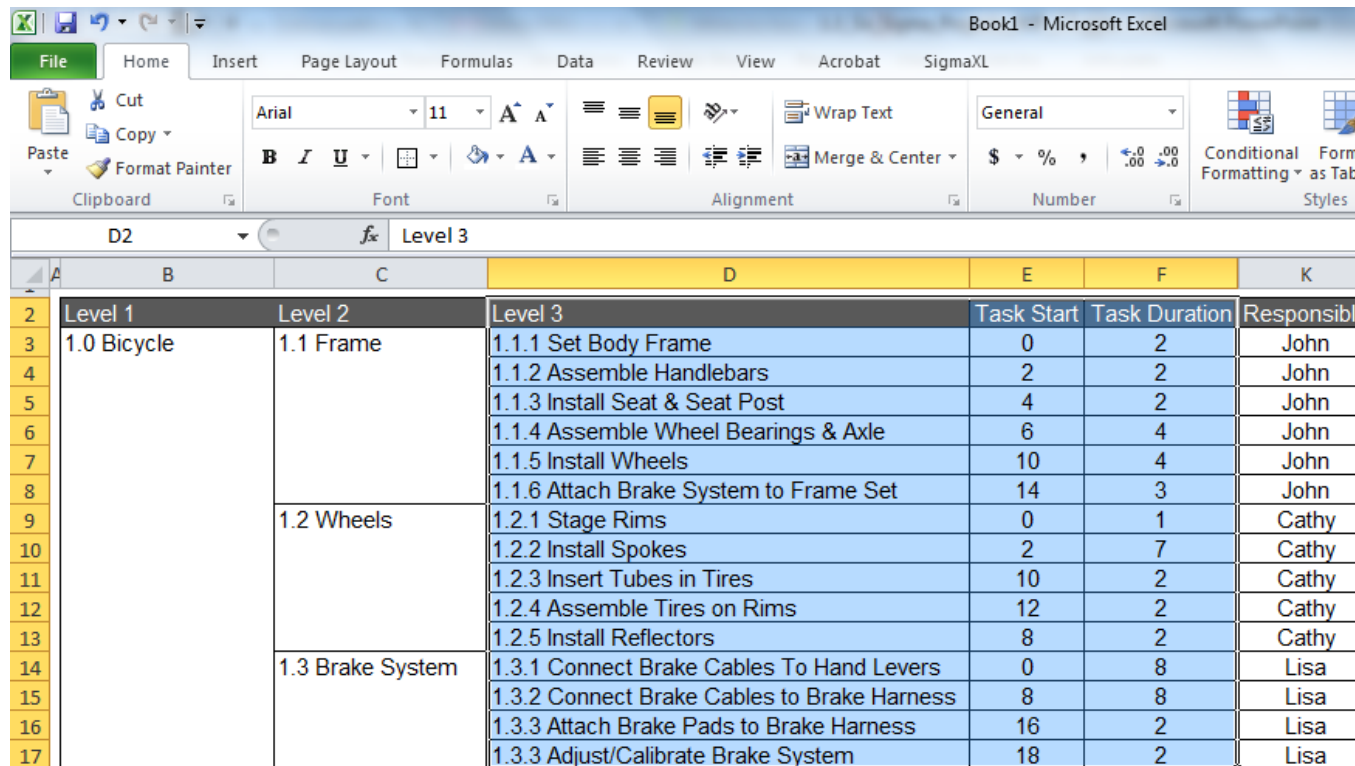

The screenshot shows an Excel spreadsheet with a project schedule table. The table is organized into levels of tasks, with columns for task start and duration. The data is as follows:

	Level 1	Level 2	Level 3	Task Start	Task Duration	Responsible
2	1.0 Bicycle	1.1 Frame	1.1.1 Set Body Frame	0	2	John
3			1.1.2 Assemble Handlebars	2	2	John
4			1.1.3 Install Seat & Seat Post	4	2	John
5			1.1.4 Assemble Wheel Bearings & Axle	6	4	John
6			1.1.5 Install Wheels	10	4	John
7			1.1.6 Attach Brake System to Frame Set	14	3	John
8		1.2 Wheels	1.2.1 Stage Rims	0	1	Cathy
9			1.2.2 Install Spokes	2	7	Cathy
10			1.2.3 Insert Tubes in Tires	10	2	Cathy
11			1.2.4 Assemble Tires on Rims	12	2	Cathy
12			1.2.5 Install Reflectors	8	2	Cathy
13		1.3 Brake System	1.3.1 Connect Brake Cables To Hand Levers	0	8	Lisa
14			1.3.2 Connect Brake Cables to Brake Harness	8	8	Lisa
15			1.3.3 Attach Brake Pads to Brake Harness	16	2	Lisa
16			1.3.3 Adjust/Calibrate Brake System	18	2	Lisa
17						





# Project Scheduling: Preparing a Gantt Chart in Excel

2. On the Insert tab select Bar > Stacked Bar.
3. On the Design tab choose a design style from the style dropdown.


The screenshot shows the Microsoft Excel interface with the following elements:

- Insert Tab:** The 'Bar' group is expanded, and the 'Stacked Bar' option is highlighted with a red box and arrow labeled '2'.
- Design Tab:** The 'Style' dropdown is highlighted with a red box and arrow labeled '3'.
- Worksheet:** A table with columns for task names, durations, and responsible persons is visible. The task names include 'Level 3', '1.1.1 Set Body Frame', '1.1.2 Assemble Handlebars', '1.1.3 Install Seat & Seat Post', '1.1.4 Assemble Wheel Bearings & Axle', '1.1.5 Install Wheels', '1.1.6 Attach Brake System to Frame Set', '1.2.1 Stage Rims', '1.2.2 Install Spokes', '1.2.3 Insert Tubes in Tires', '1.2.4 Assemble Tires on Rims', '1.2.5 Install Reflectors', '1.3.1 Connect Brake Cable to Frame Set', '1.3.2 Connect Brake Cable to Wheel Bearings & Axle', '1.3.3 Attach Brake Pads to Wheel Bearings & Axle', and '1.3.3 Adjust/Calibrate Brake System'.
- Gantt Chart:** A Gantt chart is displayed at the bottom right, showing task durations and start times. The chart is titled 'Task Start' and 'Task Duration'.



# Project Scheduling: Preparing a Gantt Chart in Excel

4. Activate the “start tasks” on your graph.
5. From the format tab select “format selection”.

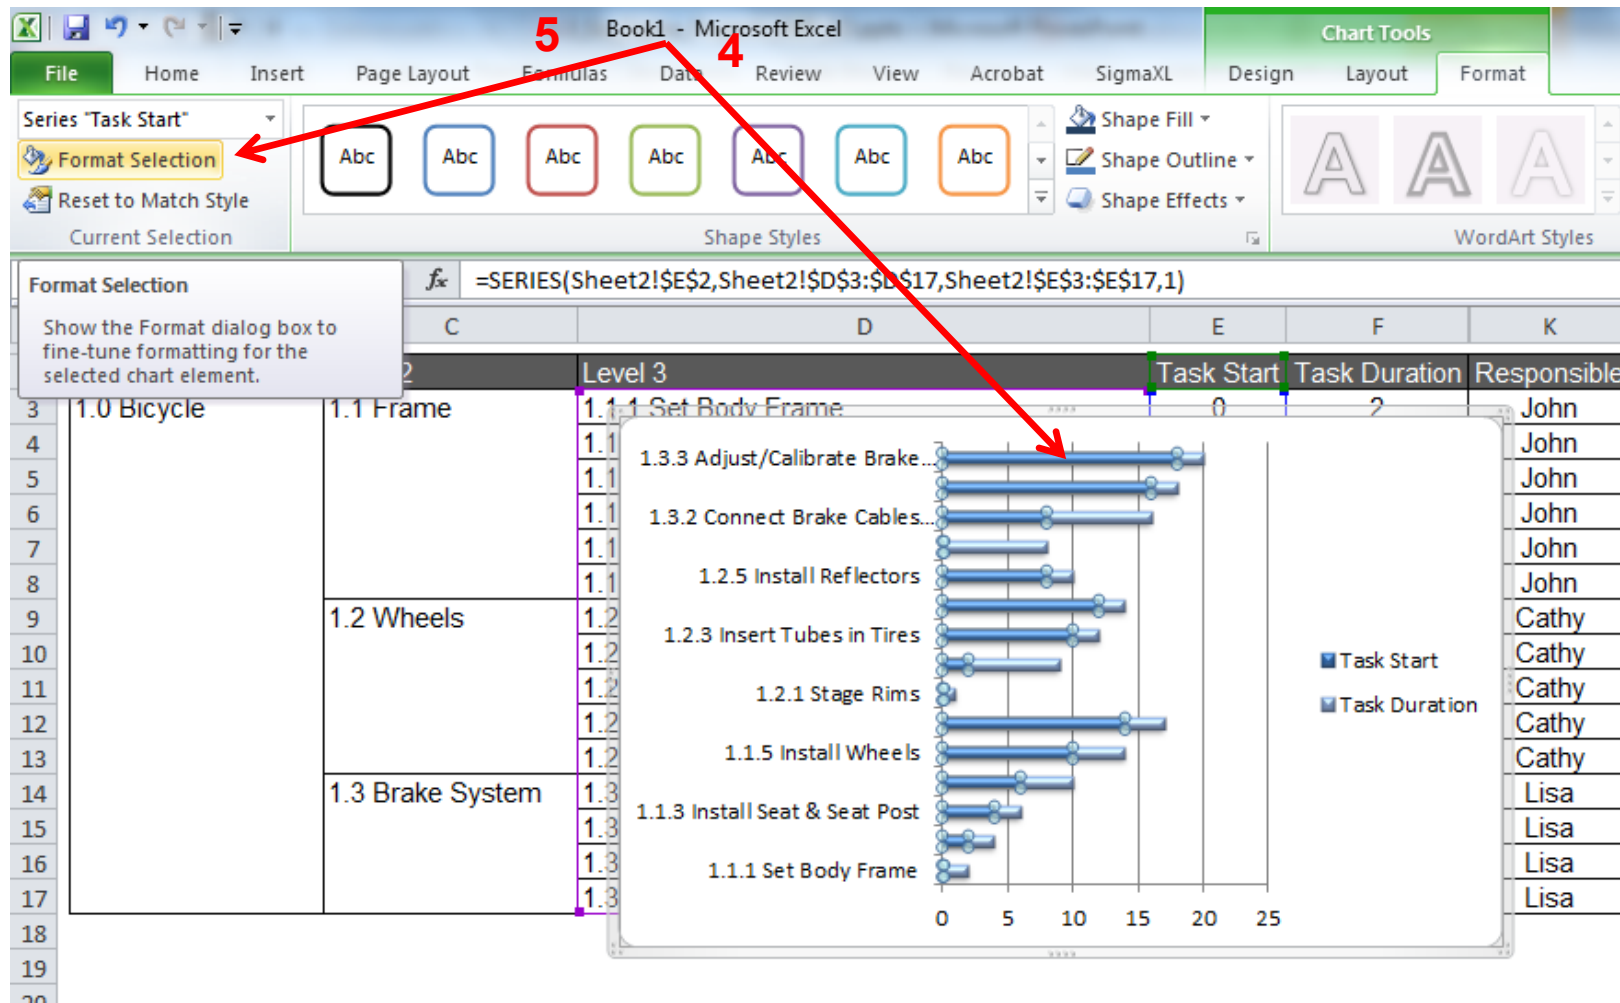

# Project Scheduling: Preparing a Gantt Chart in Excel


6. Select Fill > No Fill.
7. Select Shadow > Presets > No Shadow > Close.

The screenshot displays the Microsoft Excel interface with a Gantt chart. The chart lists tasks such as '1.1.1 Set Body Frame', '1.1.2 Assemble Handlebars', and '1.1.3 Install Seat & Seat Post'. Two 'Format Data Series' dialog boxes are overlaid on the chart. The first dialog box, labeled '6', shows the 'Fill' section with 'No fill' selected. The second dialog box, labeled '7', shows the 'Shadow' section with 'No Shadow' selected. Red arrows point from the task bars in the chart to these specific options in the dialog boxes.



# Project Scheduling: Preparing a Gantt Chart in Excel

8. Format your new Gantt chart to your own preferences.

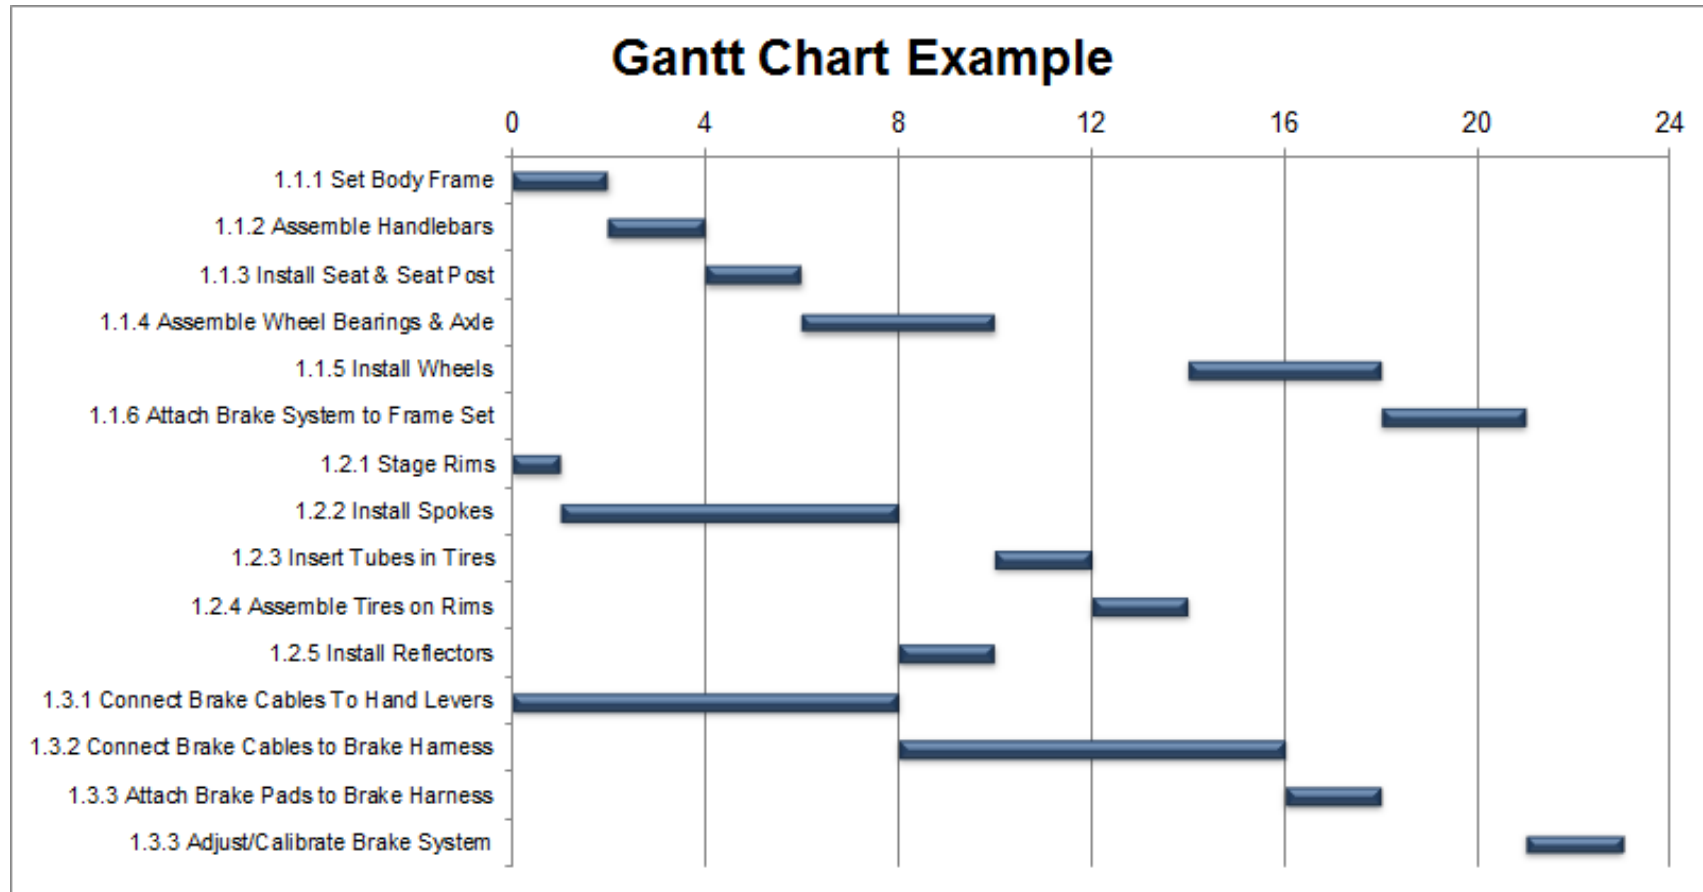

# Project Scheduling: Critical Path Method

---

**Critical Path Method (CPM)** is a project modeling technique used to identify the set of activities that are most influential to a projects completion timeline.

- Critical Path tasks are those that others are dependent upon.
- Project timelines cannot be shortened without shortening the tasks or activities that are identified as critical path items.

## Steps To Using The Critical Path Method

1. List all activities necessary to complete the project.
2. Determine the time or duration of each activity.
3. Identify the dependencies between the activities.

***Use Your Work Breakdown Structure (WBS).***



# Project Scheduling: Critical Path Method

**Critical Path Method Example:** Let's continue with our bicycle example. Note that the tasks in the WBS are already set to start based on their dependencies.



Level 2	Level 3	Task Start	Task Duration	Responsible
1.1 Frame	1.1.1 Set Body Frame	0	2	John
	1.1.2 Assemble Handlebars	2	2	John
	1.1.3 Install Seat & Seat Post	4	2	John
	1.1.4 Assemble Wheel Bearings & Axle	6	4	John
	1.1.5 Install Wheels	14	4	John
	1.1.6 Attach Brake System to Frame Set	18	3	John
1.2 Wheels	1.2.1 Stage Rims	0	1	Cathy
	1.2.2 Install Spokes	1	7	Cathy
	1.2.3 Insert Tubes in Tires	10	2	Cathy
	1.2.4 Assemble Tires on Rims	12	2	Cathy
	1.2.5 Install Reflectors	8	2	Cathy
1.3 Brake System	1.3.1 Connect Brake Cables To Hand Levers	0	8	Lisa
	1.3.2 Connect Brake Cables to Brake Harness	8	8	Lisa
	1.3.3 Attach Brake Pads to Brake Harness	16	2	Lisa
	1.3.4 Adjust/Calibrate Brake System	21	2	Lisa

- For example, Installing the wheels in step 1.1.5 requires the whole set of steps in 1.2 to be completed so 1.1.5 starts on day 14 when the wheels are ready.



# Project Scheduling: Critical Path Method

Continuing this example; the last task, 1.3.4 Adjusting the Brake System, completes on day 23 and can't begin until day 21 because the brake system must be attached to the bike frame before being calibrated.


	Level 3	Task Start	Task Duration	Responsible
	1.1.1 Set Body Frame	0	2	John
	1.1.2 Assemble Handlebars	2	2	John
	1.1.3 Install Seat & Seat Post	4	2	John
	1.1.4 Assemble Wheel Bearings & Axle	6	4	John
	1.1.5 Install Wheels	14	4	John
	1.1.6 Attach Brake System to Frame Set	18	3	John
	1.2 Wheels			
	1.2.1 Stage Rims	0	1	Cathy
	1.2.2 Install Spokes	1	7	Cathy
	1.2.3 Insert Tubes in Tires	10	2	Cathy
	1.2.4 Assemble Tires on Rims	12	2	Cathy
	1.2.5 Install Reflectors	8	2	Cathy
	1.3.1 Connect Brake Cables To Hand Levers	0	8	Lisa
	1.3.2 Connect Brake Cables to Brake Harness	8	8	Lisa
	1.3.3 Attach Brake Pads to Brake Harness	16	2	Lisa
	1.3.4 Adjust/Calibrate Brake System	21	2	Lisa



# Project Scheduling: Critical Path Method

Earlier if you noticed when we conducted our resource plan that we were out of tire tubes then you might have managed your resources differently.

Let's assume the tubes take 21 days to receive from the supplier. Below is the adjustment to our Gantt chart. Notice that the project timeline is pushed out by 8 days, finishing on day 31 instead of day 23.

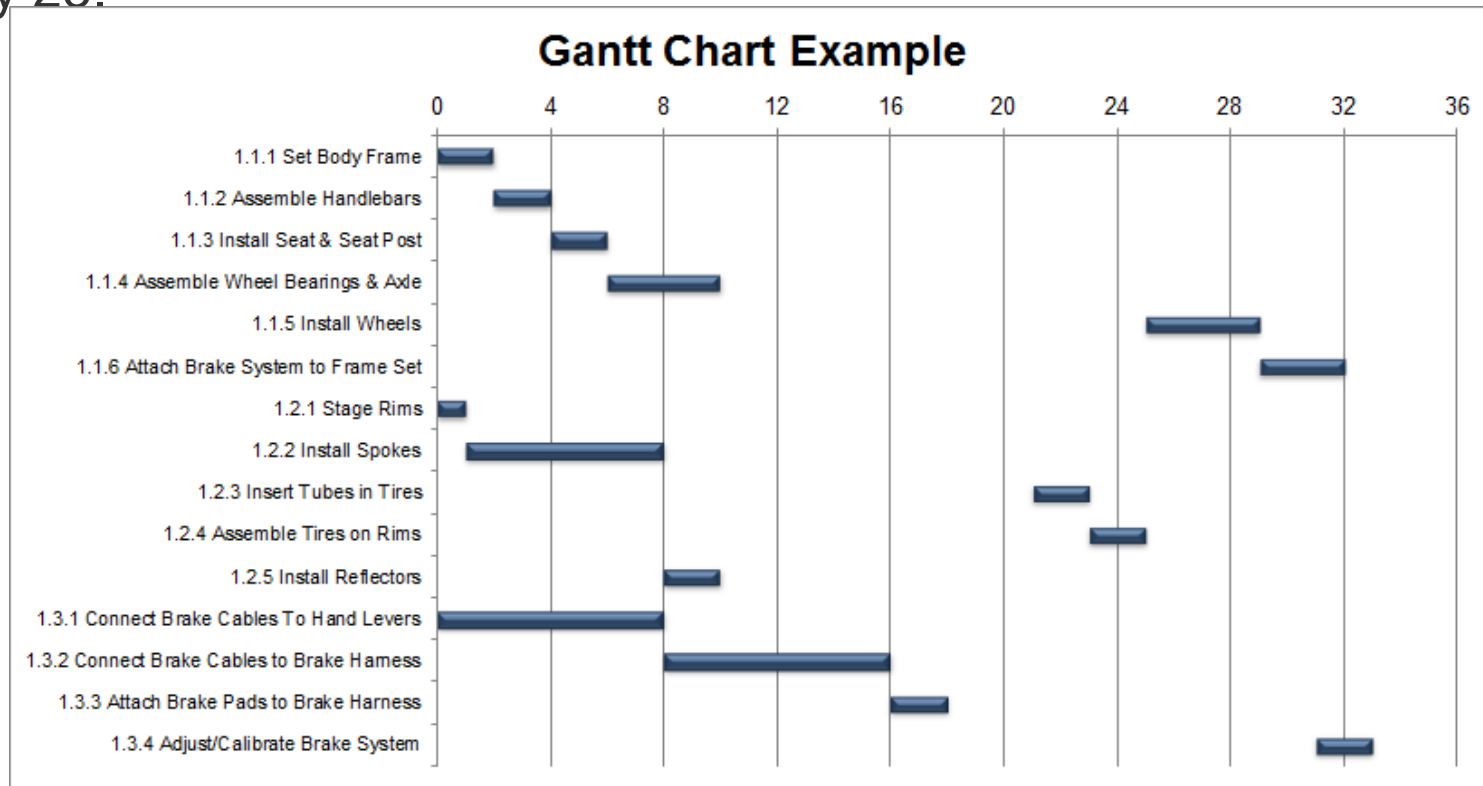



# Project Scheduling: PERT

---

**Program Evaluation & Review Technique (PERT):** is a method of evaluation that can be applied to time or cost.

- PERT provides a weighted assessment of time or cost
- PERT uses 3 parameters for estimation:
  - Optimistic or Best Case Scenario represented by 'O'.
  - Pessimistic or Worst Case Scenario represented by 'P'.
  - Most Likely Scenario represented by 'ML'.
- PERT Equation:

$$(O + (4*ML) + P) / 6$$

- The PERT equation provides for heavier weighting of the most likely scenario but also considers the best and worst cases. In the event that a best or worst case scenario is an extreme situation, the PERT will account for it in a weighted manner.



# Project Scheduling: PERT

---

Let's apply the PERT formula to our estimates of receiving our needed tire tubes from the supplier and then change our schedule based on the result.

- Your experience with this supplier tells you that they typically over estimate the time required to deliver. Therefore, their 21 day lead time on the tubes should be considered a “worst case scenario”.
- Procurement has indicated that tubes have arrived in as few as 6 days from this supplier. So, your best case scenario is 6 days.
- The most likely scenario you decide will be the median of this suppliers delivery time which is 10 days.
- Therefore:

$$\begin{aligned} & \mathbf{(O + (4*ML) + P) / 6} \\ & (6 + (4*10) + 21) / 6 \\ & (6 + 40 + 21) / 6 \\ & 67 / 6 = 11 \end{aligned}$$




# Project Scheduling: PERT

Using 11 days in your project plan instead of 21 gives you a more confident estimate of time and actually removes tire tubes as the primary detracting critical path item.

Level 3	Task Start	Task Duration
1.1.1 Set Body Frame	0	2
1.1.2 Assemble Handlebars	2	2
1.1.3 Install Seat & Seat Post	4	2
1.1.4 Assemble Wheel Bearings & Axle	6	4
1.1.5 Install Wheels	15	4
1.1.6 Attach Brake System to Frame Set	19	3
1.2.1 Stage Rims	0	1
1.2.2 Install Spokes	1	7
1.2.3 Insert Tubes in Tires	11	2
1.2.4 Assemble Tires on Rims	13	2
1.2.5 Install Reflectors	8	2
1.3.1 Connect Brake Cables To Hand Levers	0	8
1.3.2 Connect Brake Cables to Brake Harness	8	8
1.3.3 Attach Brake Pads to Brake Harness	16	2
1.3.4 Adjust/Calibrate Brake System	21	2


**Gantt Chart Example**

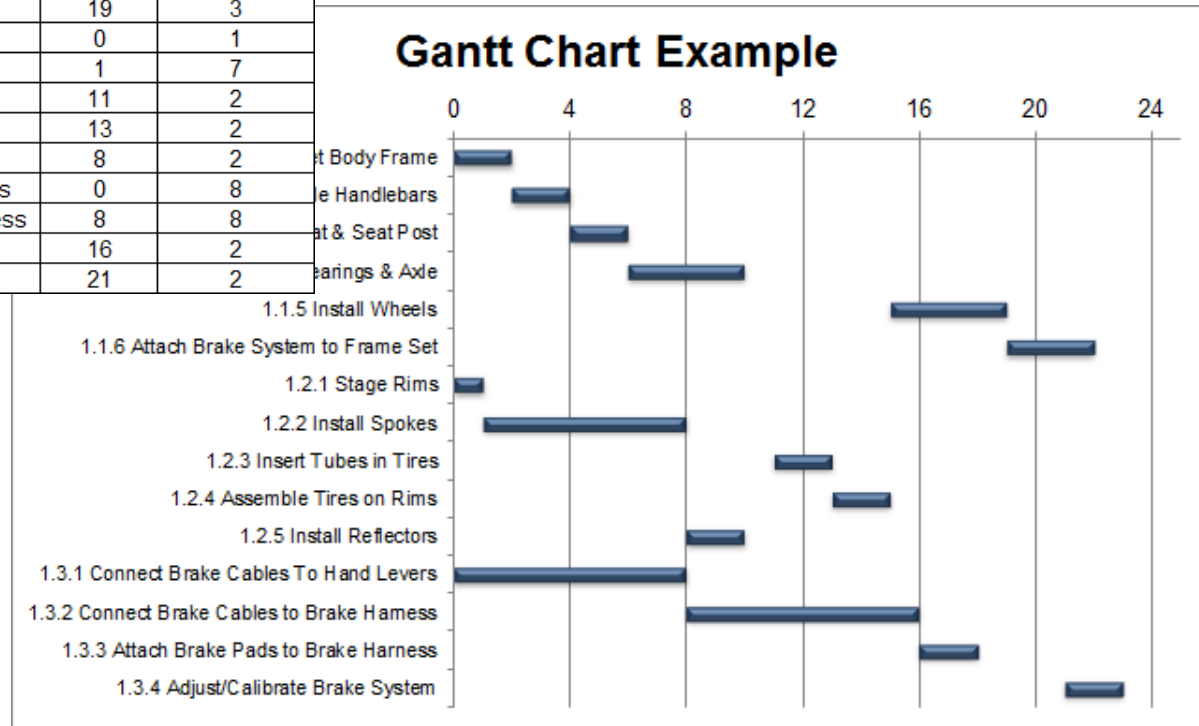

# Project Planning Activities

## Budget or Financial Plan

- Planned expenses
- Planned revenues
- Budget forecast

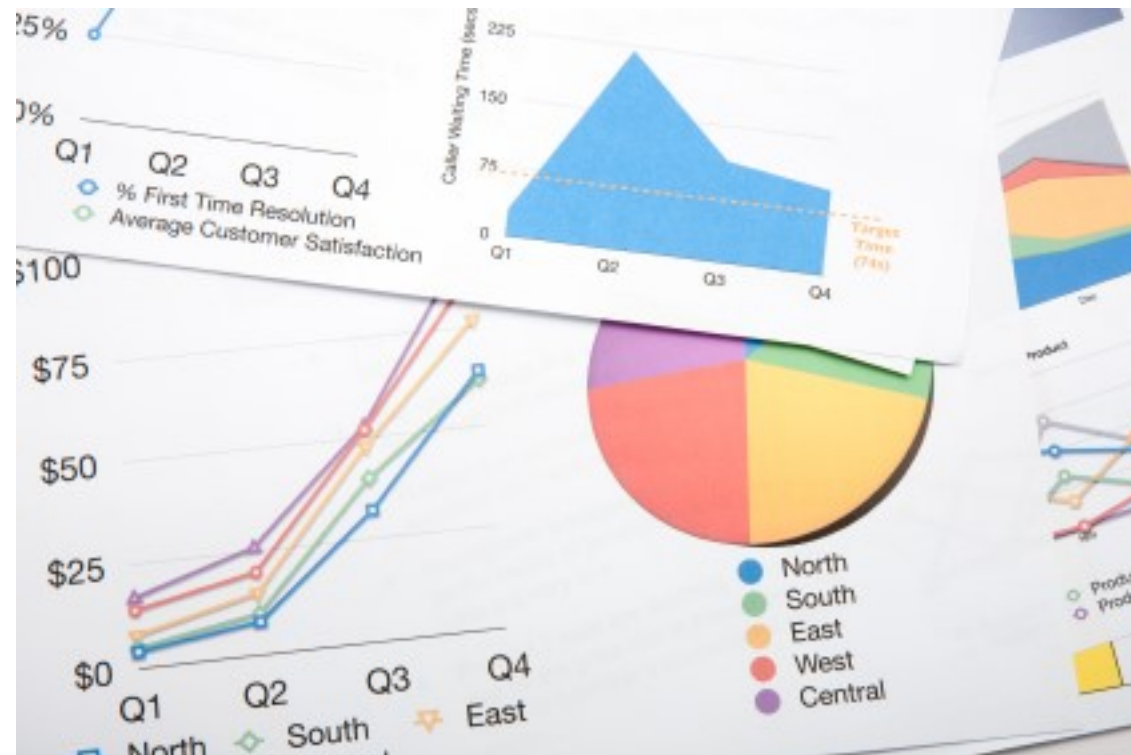


# Project Planning Activities

---

## Communication Plan

- Establish communication procedures among management, team members, and relevant stakeholders.
- Determine the communication schedule.
- Define the acceptable modes of communication.

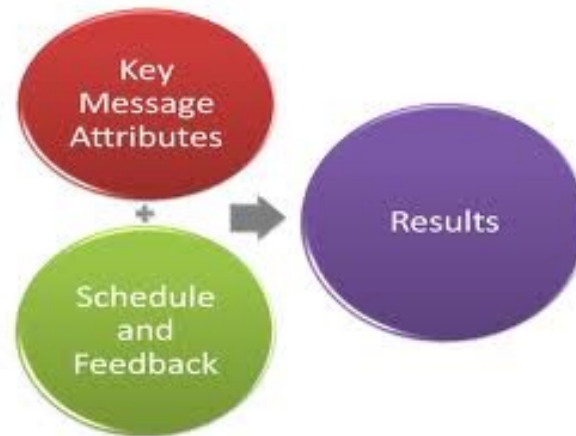

# Project Planning Activities

---

## Risk Management Plan

- Identify the sources of project risks and estimate the effects of those risks.
- Risks might arise from new technology, availability of resources, lack of inputs from customers, business risks etc.
- Assess the impact of risk to the customers/stakeholders.
- Calculate the probability of risk occurrence based on previous similar projects or industry benchmarks
- Initiate mitigation and contingency plans
- Review risks on a periodic basis



# Project Planning Tools Advantages

---

- Project planning tools are very useful to organize and communicate project plans, status, and projections.
- They help link tasks and sub-tasks or other work elements to get a whole view of what needs to be accomplished.
- They allow a more objective comparison of alternative solutions and provide consistent coverage of responsibilities.
- They allow for effective scope control and change management.
- They facilitate effective communication with all project participants and stakeholders.
- They help define management reviews.
- They act as an effective monitoring mechanism for the project.
- They establish project baselines for progress reviews and control points.



# 1.4 Lean Fundamentals





# Yellow Belt Training: Define Phase

---

## 1.1 Six Sigma Overview

- 1.1.1 What is Six Sigma
- 1.1.2 Six Sigma History
- 1.1.3 Six Sigma Approach  $Y = f(x)$
- 1.1.4 Six Sigma Methodology
- 1.1.5 Roles and Responsibilities

## 1.2 Six Sigma Fundamentals

- 1.2.1 Defining a Process
- 1.2.3 QFD
- 1.2.4 Cost of Poor Quality (COPQ)
- 1.2.5 Pareto Analysis (80:20 rule)

## 1.3 Lean Six Sigma Projects

- 1.3.1 Six Sigma Metrics
- 1.3.2 Business Case and Charter
- 1.3.3 Project Team Selection
- 1.3.4 Project Risk Management
- 1.3.5 Project Planning

## 1.4 Lean Fundamentals

- 1.4.1 Lean and Six Sigma
- 1.4.2 History of Lean
- 1.4.3 The Seven Deadly Muda
- 1.4.4 Five-S (5S)



# 1.4.1 Lean and Six Sigma



# What is Lean?

---


- A **lean enterprise** intends to eliminate waste and allow only value to be pulled through its system.
- **Lean manufacturing** is characterized by:
  - Identifying and driving value
  - Establishing flow and pull systems
  - Creating production availability and flexibility
  - Zero waste
- **Waste Elimination**
  - Waste identification and elimination is critical to any successful lean enterprise.
  - Elimination of waste enables flow, drives value, cuts cost, and provides flexible and available production.




# The 5 Lean Principles

---

- The following 5 principles of lean are taken from the book *Lean Thinking* (1996) by James P. Womack and Daniel T. Jones.
  1. Specify value desired by customers.
  2. Identify the value stream.
  3. Make the product flow continuous.
  4. Introduce pull systems where continuous flow is possible.
  5. Manage toward perfection so that the number of steps and the amount of time and information needed to serve the customer continually falls.

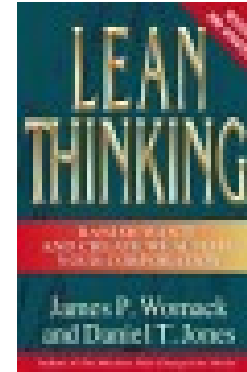

# Lean & Six Sigma

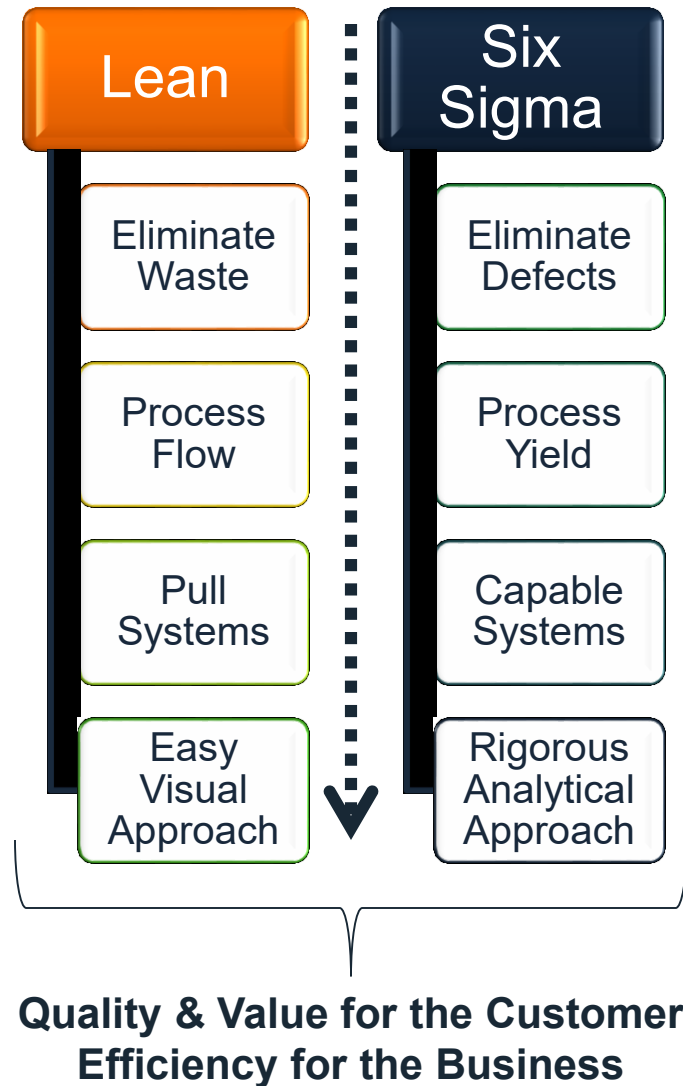

- Lean and Six Sigma both have the objectives of producing high value (**quality**) at lower costs (**efficiency**).
- They approach these objectives in somewhat different manners but in the end, both Lean and Six Sigma drive out waste, reduce defects, improve processes, and stabilize the production environment.
- Lean and Six Sigma are a perfect combination of tools for improving quality and efficiency.


## 1.4.2 History of Lean



# History of Lean

## Lean Six Sigma

*History & Timeline*

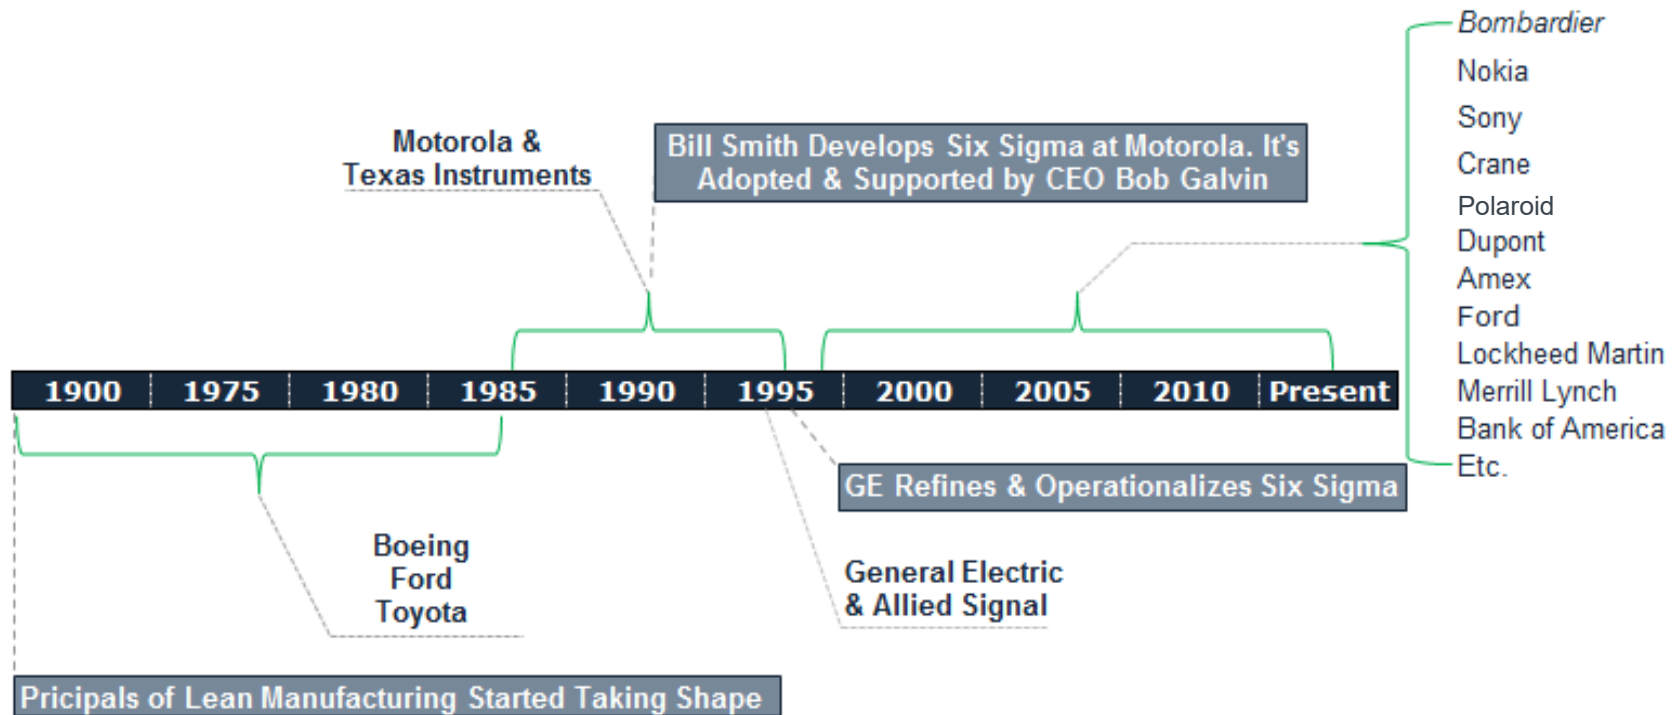

# History of Lean

---

- Lean thinking originated, as far as is known, the 1400s.
- Henry Ford established the first mass production system in 1913 by combining standard parts, conveyors, and work flow.
- Decades later, Kiichiro Toyoda and Taiichi Ohno at Toyota improved and implemented various new concepts and tools (e.g., value stream, takt time, kanban etc.) based on Ford's effort.
- Toyota developed what is known today as the Toyota Production System (TPS) based on lean principles.



# History of Lean

---

- Starting in the mid 1990s, Lean became extensively recognized and implemented when more and more Fortune 100 companies began to adopt Lean and Six Sigma.
- The term “Lean manufacturing” was introduced by James Womack in the 1990s.
- Lean and Six Sigma share similar objectives, work hand in hand, and have benefited from one another in the past 30 years.

## 1.4.3 Seven Deadly Muda



# The 7 Deadly Muda

---

- The Japanese word for waste is “muda.”
- There are 7 commonly recognized forms of waste, often referred to as the “7 deadly muda.”
  1. Defects
  2. Overproduction
  3. Over-Processing
  4. Inventory
  5. Motion
  6. Transportation
  7. Waiting



# The 7 Deadly Muda: Defects

---

- Defects or defectives are an obvious waste for any working environment or production system



- Defects require rework during production and/or after the product is returned from an unhappy customer.
- Some defects are difficult to solve and they create “workarounds” and hidden factories.
- Eliminating defects is a sure way to improve product quality, customer satisfaction, and production costs.

# The 7 Deadly Muda: Overproduction

---

- Overproduction is wasteful because your system expends energy and resources to produce more materials than the customer or next function requires.



- Overproduction is one of the most detrimental of the seven deadly muda because it leads to many others:
  - Inventory
  - Transportation
  - Waiting etc.

# The 7 Deadly Muda: Over-processing

---



**Over-processing** occurs any time more work is done than is required by the next process step, operation, or consumer.

- Over-processing also includes being over capacity (scheduling more workers than required or having more machines than necessary).
- Another form of over processing can be buying tools or software that are overkill (more precise, complex, or expensive than required).

# The 7 Deadly Muda: Inventory

---



- **Inventory** is an often overlooked waste. Look at the picture above and imagine all the time, materials, and logistics that went into establishing such an abundance of inventory.
- If this were your personal business, and inventory velocity was not matched with production, how upset would you be?

# The 7 Deadly Muda: Motion

---



- **Motion** is another form of waste often occurring as a result of poor setup, configuration, or operating procedures.
- Wasted motion can be experienced by machines or humans.
- Wasted motion is very common with workers who are unaware of the impact of small unnecessary movements in repetitive tasks.
- Wasted motion is exaggerated by repetition or recurring tasks.





# The 7 Deadly Muda: Transportation

---



- **Transportation** is considered wasteful because it does *nothing* to add value or transform the product.
- Imagine for a moment driving to and from work twice before getting out of your car to go into work. . .

- That is waste in the form of transportation.
- The less driving you have to do, the better.
- In a similar way, the less transportation a product has to endure, the better. There would be fewer opportunities for delay, destruction, loss, damage etc.

# The 7 Deadly Muda: Waiting

---



- **Waiting** is an obvious form of waste and is typically a symptom of an upstream problem.
- Waiting is usually caused by inefficiency, bottlenecks, or poorly-designed work flows within the value stream.
- Waiting can also be caused by inefficient administration.
- Reduction in waiting time will require thoughtful applications of lean and process improvement.



## 1.4.4 Five-S (5S)




# What is 5S?

---

- **5S** is systematic method to organize, order, clean, and standardize a workplace...and to keep it that way!
  - 5S is a methodology of organizing and improving the work environment.
- 5S is summarized in five Japanese words all starting with the letter S:
  - **Seiri** (sorting)
  - **Seiton** (straightening)
  - **Seiso** (shining)
  - **Seiketsu** (standardizing)
  - **Shisuke** (sustaining)
- 5S was originally developed in Japan and is widely used to optimize the workplace to increase productivity and efficiency.




# Five-S (5S)

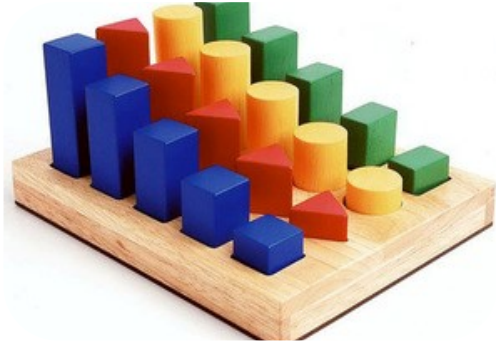

Sort




Set in Order

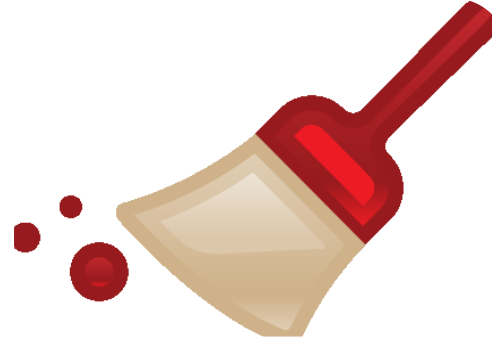

Shine



Standardize

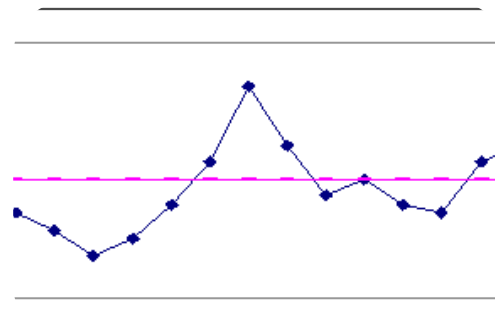

Sustain

# Goals of 5S

---

- Reduced waste
- Reduced cost
- Establish a work environment that is:
  - self-explaining
  - self-ordering
  - self-regulating
  - self-improving.
  - Where there is/are **no more**:
    - Wandering and/or searching
    - Waiting or delaying
    - Secret hiding spots for tools
    - Obstacles or detours
    - Extra pieces, parts, materials etc.
    - Injuries
    - Waste.



# Benefits of 5S Systems

---

- Reduced changeovers
- Reduced defects
- Reduced waste
- Reduced delays
- Reduced injuries
- Reduced breakdowns
- Reduced complaints
- Reduced red ink
- Higher quality
- Lower costs
- Safer work environment
- Greater associate and equipment capacity.



# Reported Results of 5S Systems

---

- Cut in floor space: 60%
- Cut in flow distance: 80%
- Cut in accidents: 70%
- Cut in rack storage: 68%
- Cut in number of forklifts: 45%
- Cut in machine changeover time: 62%
- Cut in annual physical inventory time: 50%
- Cut in classroom training requirements: 55%
- Cut in nonconformance in assembly: 96%
- Increase in test yields: 50%
- Late deliveries: 0%
- Increase in throughput: 15%





# Sorting (Seiri)

---



- Go through all the tools, parts, equipment, supply, and material in the workplace.
- Categorize them into two major groups: needed and unneeded.
- Eliminate the unneeded items from the workplace. Dispose of or recycle those items.
- Keep the needed items and sort them in the order of priority. **When in doubt...throw it out!**

# Straightening (Seiton)

---



- **Straightening** in 5S is also called **setting in order**.
- Label each needed item.
- Store items at their best locations so that the workers can find them easily whenever they needed any item.
- Reduce the motion and time required to locate and obtain any item whenever it is needed.
- Promote an efficient work flow path.
- Use visual aids like the tool board image on this page.

# Shining (Seiso)

---



- **Shining** in 5S is also called **sweeping**.
- Clean the workplace thoroughly.
- Maintain the tidiness of the workplace.
- Make sure every item is located at the specific location where it should be.
- Create the ownership in the team to keep the work area clean and organized.

# Standardizing (Seiketsu)

---

- **Standardize** the workstation and the layout of tools, equipment and parts.
- Create identical workstations with a consistent way of storing the items at their specific locations so that workers can be moved around to any workstation any time and perform the same task.



# Sustaining (Shisuke)

---

- **Sustaining** in 5S is also called **self-discipline**.
- Create the culture in the team to follow the first four S's consistently.
- Avoid falling back to the old ways of cluttered and unorganized work environment.
- Keep the momentum of optimizing the workplace.
- Promote innovations of workplace improvement.
- Sustain the first four S's using:
  - 5S Maps
  - 5S Schedules
  - 5S Job cycle charts
  - Integration of regular work duties
  - 5S Blitz schedules
- Daily workplace scans.



# Simplified Summary of 5S

---

1. **Sort** – “when in doubt, move it out.”
2. **Set in Order** – Organize all necessary tools, parts, and components of production. Use visual ordering techniques wherever possible.
3. **Shine** – Clean machines and/or work areas. Set regular cleaning schedules and responsibilities.
4. **Standardize** – Solidify previous three steps, make 5S a regular part of the work environment and everyday life.
5. **Sustain** – Audit, manage, and comply with established 5S guidelines for your business or facility.



# Five-S (5S)

---

- A few words about 5S and the Lean Enterprise
  - As a method, 5S generates immediate improvements.
  - 5S is one of many effective lean methods that create observable results.
  - It is tempting to implement 5S alone without considering the entire value stream.
  - However, it is advisable to consider a well-planned lean manufacturing approach to the entire production system.

# 2.0 Measure Phase





# Yellow Belt Training: Measure Phase

---

## 2.1 Process Definition

- 2.1.1 Cause and Effect Diagrams
- 2.1.2 Cause and Effects Matrix
- 2.1.3 Process Mapping
- 2.1.4 FMEA: Failure Modes & Effects Analysis
- 2.1.5 Theory of Constraints

## 2.2 Six Sigma Statistics

- 2.2.1 Basic Statistics
- 2.2.2 Descriptive Statistics
- 2.2.3 Distributions and Normality
- 2.2.4 Graphical Analysis

## 2.3 Measurement System Analysis

- 2.3.1 Precision and Accuracy
- 2.3.2 Bias, Linearity, and Stability
- 2.3.3 Gage R&R
- 2.3.4 Variable and Attribute MSA

## 2.4 Process Capability

- 2.4.1 Capability Analysis
- 2.4.2 Concept of Stability
- 2.4.3 Attribute and Discrete Capability
- 2.4.4 Monitoring Techniques

# 2.1 Process Definition



# Yellow Belt Training: Measure Phase

---

## 2.1 Process Definition

- 2.1.1 Cause and Effect Diagrams
- 2.1.2 Cause and Effects Matrix
- 2.1.3 Process Mapping
- 2.1.4 FMEA: Failure Modes & Effects Analysis
- 2.1.5 Theory of Constraints

## 2.2 Six Sigma Statistics

- 2.2.1 Basic Statistics
- 2.2.2 Descriptive Statistics
- 2.2.3 Distributions and Normality
- 2.2.4 Graphical Analysis

## 2.3 Measurement System Analysis

- 2.3.1 Precision and Accuracy
- 2.3.2 Bias, Linearity, and Stability
- 2.3.3 Gage R&R
- 2.3.4 Variable and Attribute MSA

## 2.4 Process Capability


- 2.4.1 Capability Analysis
- 2.4.2 Concept of Stability
- 2.4.3 Attribute and Discrete Capability
- 2.4.4 Monitoring Techniques

# 2.1.1 Cause and Effect Diagram



# What is a Cause and Effect Diagram?

- A **cause and effect diagram** is also called a *Fishbone Diagram* or *Ishikawa Diagram*. It was created by Kaoru Ishikawa and is used to identify, organize, and display the potential causes of a specific effect or event in a graphical way similar to a fishbone.
- It illustrates the relationship between one specified event (output) and its categorized potential causes (inputs) in a visual and systematic way.

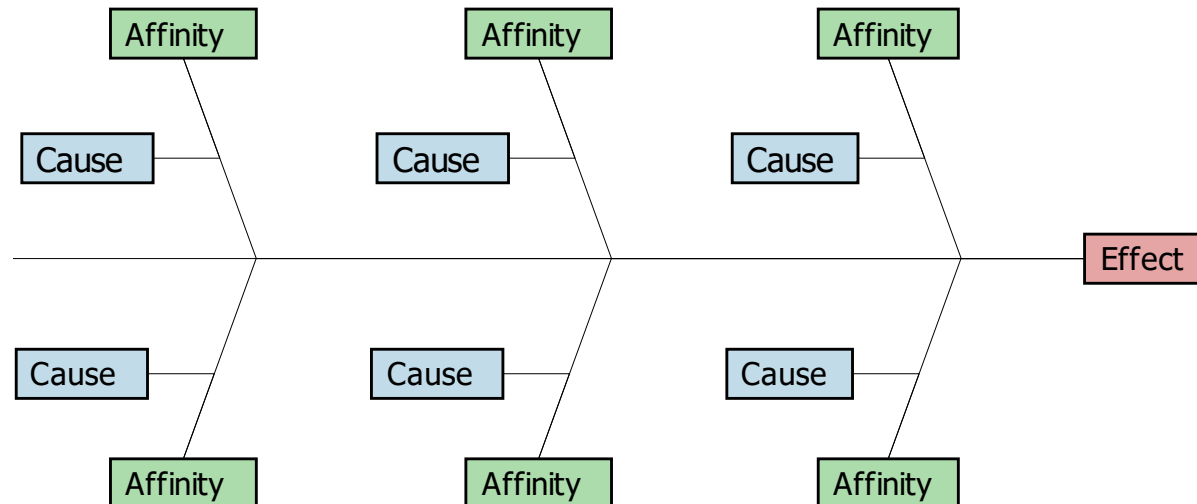

# Major Categories of Potential Causes

---

- P4ME
  - **People:** People who are involved in the process
  - **Methods:** How the process is completed (e.g., procedures, policies, regulations, laws)
  - **Machines:** Equipment or tools needed to perform the process
  - **Materials:** Raw materials or information needed to do the job
  - **Measurements:** Data collected from the process for inspection or evaluation
  - **Environment:** Surroundings of the process (e.g., location, time, culture).



# How to Plot a Cause and Effect Diagram

---

- Step 1: Identify and define the effect/event being analyzed.
  - Clearly state the operational definition of the effect/event of interest.
  - The event can be the positive outcome desired or negative problem targeted to solve.
  - Enter the effect/event in the end box of the Fishbone diagram and draw a spine pointed to it.

# How to Plot a Cause and Effect Diagram

---

- Step 1





# How to Plot a Cause and Effect Diagram


---

- Step 2: Brainstorm the potential causes or factors of the effect/event occurring.
  - Identify any factors with a potential impact on the effect/event and include them in this step.
  - Put all the identified potential causes aside for use later.

# How to Plot a Cause and Effect Diagram

---

- Step 2

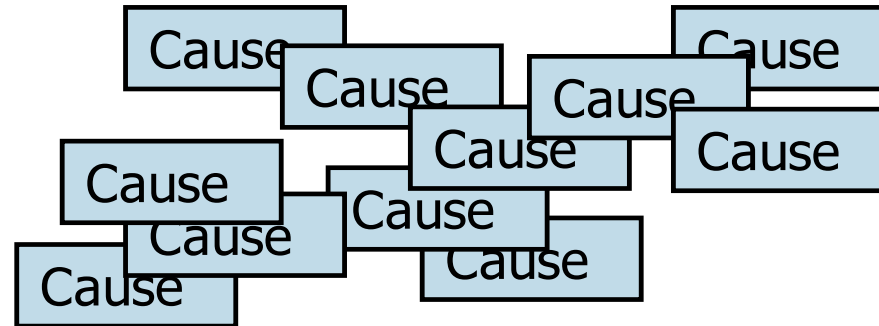

# How to Plot a Cause and Effect Diagram


---

- Step 3: Identify the main categories of causes and group the potential causes accordingly.
  - Besides P4ME (i.e., people, methods, machines, materials, measurements, and environment), you can group potential causes into other customized categories.
  - Below each major category, you can define sub-categories and then classify them to help you visualize the potential causes.
  - Enter each cause category in a box and connect the box to the spine. Link each potential cause to its corresponding cause category.



# How to Plot a Cause and Effect Diagram

- Step 3

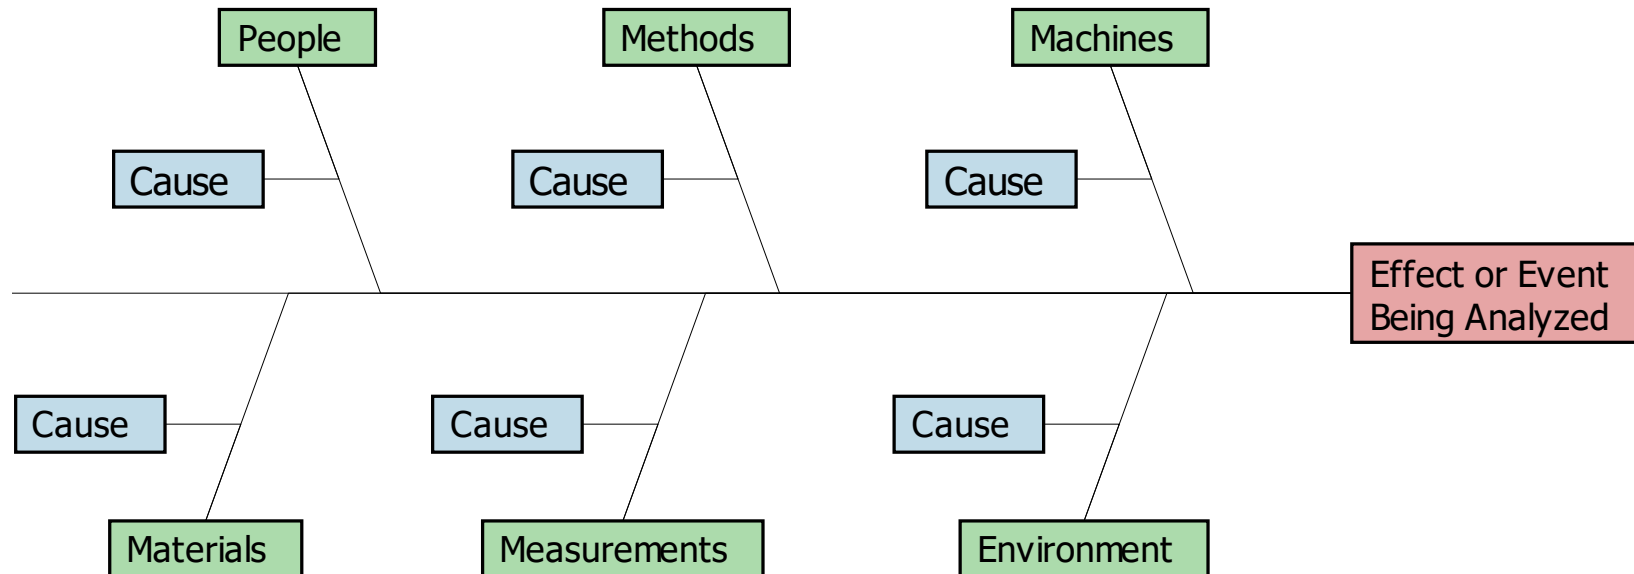

# How to Plot a Cause and Effect Diagram

---

- Step 4: Analyze the cause and effect diagram.
  - A cause and effect diagram includes all the possible factors of the effect/event being analyzed.
  - Use a Pareto chart to filter causes the project team needs to focus on.
  - Identify causes with high impact that the team can take action upon.
  - Determine how to measure causes and effects quantitatively. Prepare for further statistical analysis.



# Benefits to Using Cause and Effect Diagram

---

- Helps to quickly identify and sort the potential causes of an effect.
- Provides a systematic way to brainstorm potential causes effectively and efficiently.
- Identifies areas requiring data collection for further quantitative analysis.
- Locates “low-hanging fruit.”



# Limitation of Cause and Effect Diagrams

---

- A cause and effect diagram only provides qualitative analysis of correlation between each cause and the effect.
- One cause and effect diagram can only focus on *one* effect or event at a time.
- Further statistical analysis is required to quantify the relationship between various factors and the effect and identify the root causes.

# Cause and Effect Diagram Example

---

- *Case study:*
  - A real estate company is interested to find the root causes of high energy costs of its properties.
  - The cause and effect diagram is used to identify, organize, and analyze the potential root causes.



# Cause and Effect Diagram Example


---

- Step 1: Identify and define the effect/event being analyzed: high energy costs of buildings.




# Cause and Effect Diagram Example

- Step 2: Brainstorm the potential causes or factors of the high energy costs.

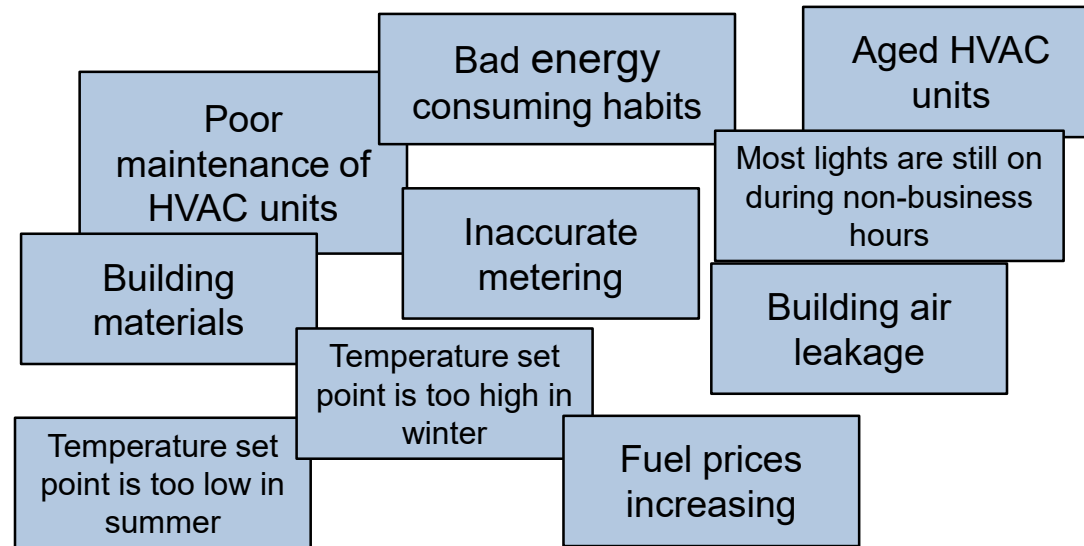

# Cause and Effect Diagram Example

- Step 3: Identify the main categories of causes and group the potential causes accordingly.

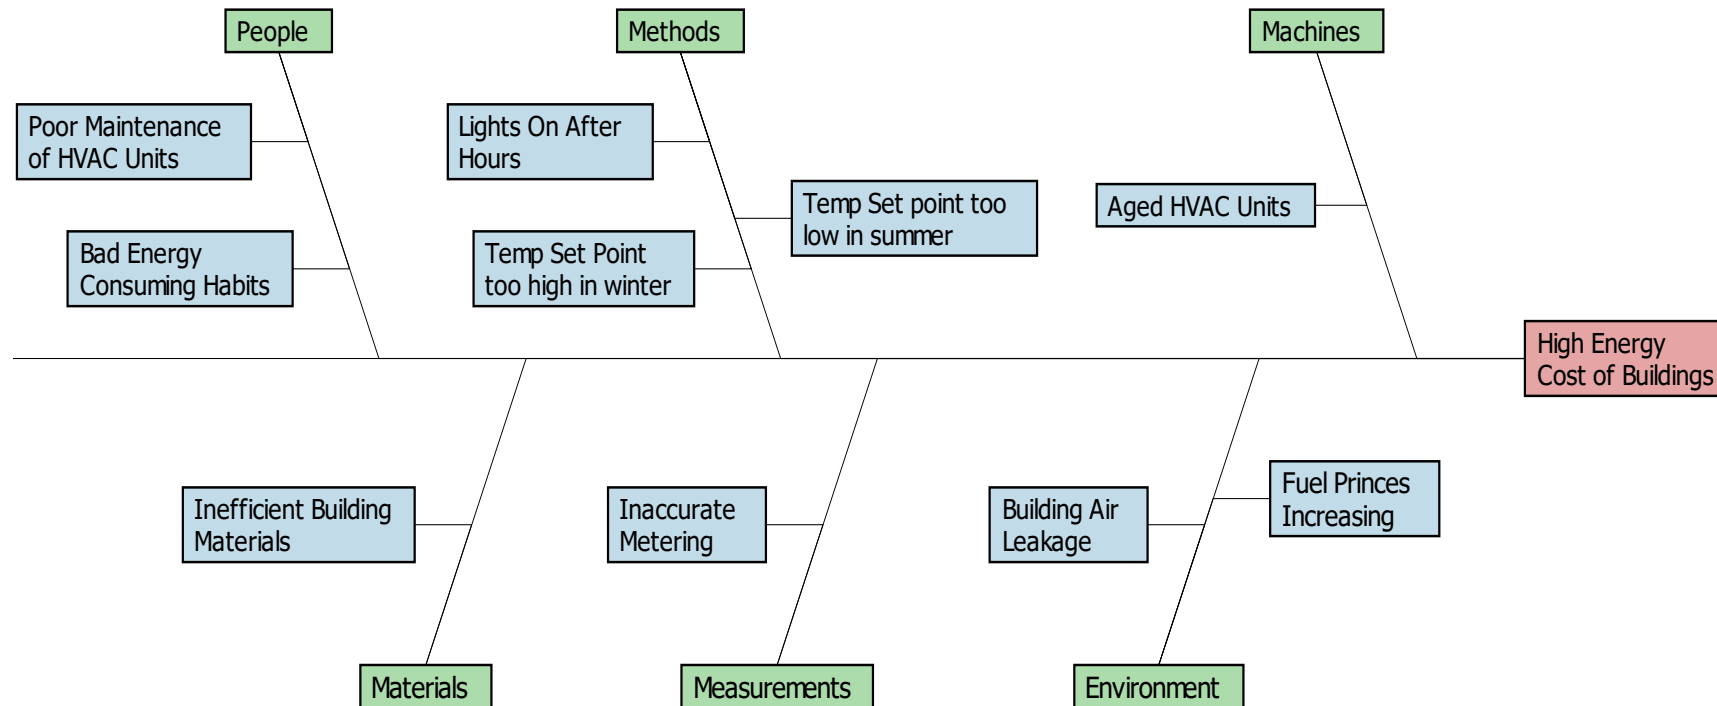

# Cause and Effect Diagram Example

---

- Step 4: Analyze the cause and effect (C&E) diagram.
  - After completing the C&E diagram, the real estate company conducts further research on each potential root cause.
  - It is discovered that:
    - The utility metering is accurate
    - The building materials are fine and there is not significant amount of air leakage from the building
    - The fuel prices increased recently but were negligible
    - Most lights are off during the non-business hours except that some lights have to be on for security purposes
    - The temperature set points in the summer and winter are both adequate and reasonable
    - The high energy costs are probably caused by the poor HVAC maintenance on aged units and the wasteful energy consuming habits.
- Next, the real estate company needs to collect and analyze the data to check whether root causes identified in the C&E diagram are statistically the causes of the high energy costs.



## 2.1.2 Cause and Effects Matrix




# What is a Cause and Effect Matrix?

---

- The **cause and effect matrix** (XY Matrix) is a tool to help subjectively quantify the relationship of several X's to several Y's.
- Among the Y's under consideration, two important ones should be the *primary* and *secondary metrics* of your Six Sigma project.
- The X's should be derived from your cause and effect diagram. Let us take a peek as what it looks like on the next page.



# Cause and Effects Matrix

Lean Six Sigma XY Matrix											
Date:											
Project:											
XY Matrix Owner:											
Output Measures (Y's)*	Y <sub>1</sub>	Y <sub>2</sub>	Y <sub>3</sub>	Y <sub>4</sub>	Y <sub>5</sub>	Y <sub>6</sub>	Y <sub>7</sub>	Y <sub>8</sub>	Y <sub>9</sub>	Y <sub>10</sub>	
Weighting (1-10):											
Input Variables (X's)#	For each X, score its impact on each Y listed above (use a 0,3,5,7 scale)										Score
X <sub>1</sub>											0
X <sub>2</sub>											0
X <sub>3</sub>											0
X <sub>4</sub>											0
X <sub>5</sub>											0
X <sub>6</sub>											0
X <sub>27</sub>											0
X <sub>28</sub>											0
X <sub>29</sub>											0
X <sub>30</sub>											0
<p><b>XY Matrix Premis:</b> The XY Matrix or "Cause &amp; Effect Matrix functions on the premis of the Y=f(x) equation.            *Rate each "Y" on a scale of 1 to 10 with 1 being the least important output measure            #For each X rate its impact on each Y using a 0,3,5,7 scale (0=No impact, 3=Weak impact, 5=Moderate impact, 7=Strong</p>											

©Copyright Lean Sigma Corporation 2013



# How to Use a Cause and Effect Matrix

---

1. Across the top enter your output measures. These are the Y's that are important to your project.
2. Next, give each Y a weight. Use a 1–10 scale, 1 being least important and 10 most important.
3. Below, in the leftmost column, enter all the variables you identified with your cause and effect diagram.
4. Within the matrix itself, rate the strength of the relationship between the X in the row and the corresponding Y in that column. Use a scale of 0, 3, 5, and 7.
5. Lastly, sort the “Score” column to order the most important X's first.





# Cause and Effect Matrix Notes

Date: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 XY Matrix Owner: \_\_\_\_\_

**Enter Y's Here and Weight on a scale of 1-10**

Output Measures (Y's)	Y <sub>1</sub>	Y <sub>2</sub>	Y <sub>3</sub>	Y <sub>4</sub>	Y <sub>5</sub>	Y <sub>6</sub>	Y <sub>7</sub>	Y <sub>8</sub>	Y <sub>9</sub>	Y <sub>10</sub>
Weighting (1-10):										

*For each X, score its impact on each Y listed above (use a 0,3,5,7 scale)*

Input Variables (X's) <sup>a</sup>											Score
X <sub>1</sub>											0
X <sub>2</sub>											0
X <sub>3</sub>											0
X <sub>4</sub>											0
X <sub>5</sub>											0
X <sub>6</sub>											0
X <sub>19</sub>											0
X <sub>20</sub>											0
X <sub>21</sub>											0
X <sub>30</sub>											0

**Enter X's here and rate them against the Y's. Use a 0,3,5,7 scale.**

**When you're done, you can sort by score and Pareto the results to show which X's are thought to have the most impact.**

**XY Matrix Premise:** The XY Matrix or Cause & Effect Matrix functions on the premise of the  $Y=f(x)$  equation. Rate each Y on a scale of 1 to 10, with 1 being the least important output measure. For each X rate its impact on each Y using a 0,3,5,7 scale (0=No impact, 3=Weak impact, 5=Moderate impact, 7=Strong)



# After You Have Completed the C&E Matrix

---

After you have completed your cause and effects matrix, build a strategy for validating and/or eliminating the x's as significant variables to the  $Y=f(x)$  equation.

- Build a data collection plan
- Prepare and execute planned studies
- Perform analytics
- Review results with SMEs
- etc.



## 2.1.3 Process Mapping



# What is a Process Map?

---

- A **process map** is a graphical representation of a process flow.
- It visualizes how the business process is accomplished step by step.
- It describes how the information or materials sequentially flow from one business entity to the next.
- It illustrates who is responsible for what between the process boundaries.
- It depicts the input and output of each individual process step.
- In the Measure phase, the project team should map the current state of the process instead of the ideal state.



# Process Map Basic Symbols

---


- The following four symbols are the most commonly used symbols in a process map.



*Terminator (Oval):*  
Shows the start/end points in the process.



*Process (Rectangle):*  
Indicates a single process step.



*Decision (Diamond):*  
Indicates a question with two choices (e.g., Yes/No).



*Flow Line (Arrow):*  
Shows the direction of the process flow.

# Additional Process Symbols

---



*Alternative Process:*

Indicates a process step as the alternate of a normal process step.



*Predefined Process:*

Indicates a formally defined process step.



*Manual Operation:*

Indicates a process step conducted manually.



*Preparation:*

Indicates a preparation step.



*Delay:*

Indicates a waiting period in the process.

# Additional Process Symbols

---

- Additional file- and information-related symbols:



*Data (I/O):*

Shows the inputs and outputs of a process.



*Document:*

Indicates a process step that results in a document.



*Multi-Document:*

Indicates a process step that results in multiple documents.



*Stored Data:*

Indicates a process step that stores data.



*Magnetic Disk:*

Indicates a database.

# Additional Process Symbols

---

- Additional control of flow symbols:



*Off-Page Connector:*

Indicates the process flow continues onto another page.



*Merge:*

Indicates multiple processes merge into one.



*Extract:*

Indicates a process splits into multiple parallel processes.



*Or:*

Indicates a single data processing flow diverges to multiple branches with different criteria requirements.



*Summing Junction:*

Indicates multiple data processing flows converge into one.



# How to Plot a Process Map

---

- Step 1: Define boundaries of the process you want to map.
  - A process map can depict the flow of an entire process or a segment of it.
  - You need to identify and define the beginning and ending points of the process before starting to plot.
  - Use operational definition.



# How to Plot a Process Map

---

- Step 2: Define and sort the process steps with the flow.
  - Consult with process owners and subject matter experts or observe the process in action to understand how the process is actually performed.
  - Record the process steps and sort them according to the order of their occurrence.




# How to Plot a Process Map

---

- Step 3: Fill the step information into the appropriate process symbols and plot the diagram.
  - In the team meeting of process mapping, place the sticky notes with different colors on a white board to flexibly adjust the under-construction process map.
  - The flow lines are plotted directly on the white board. For the decision step, rotate the sticky note by 45°.
  - When the map is completed on the white board, record the map using Excel, PowerPoint, or Visio.

# How to Plot a Process Map

- Step 3:
  - To illustrate the responsibility of different organizations involved in the process, use a Swim Lane Process Map.

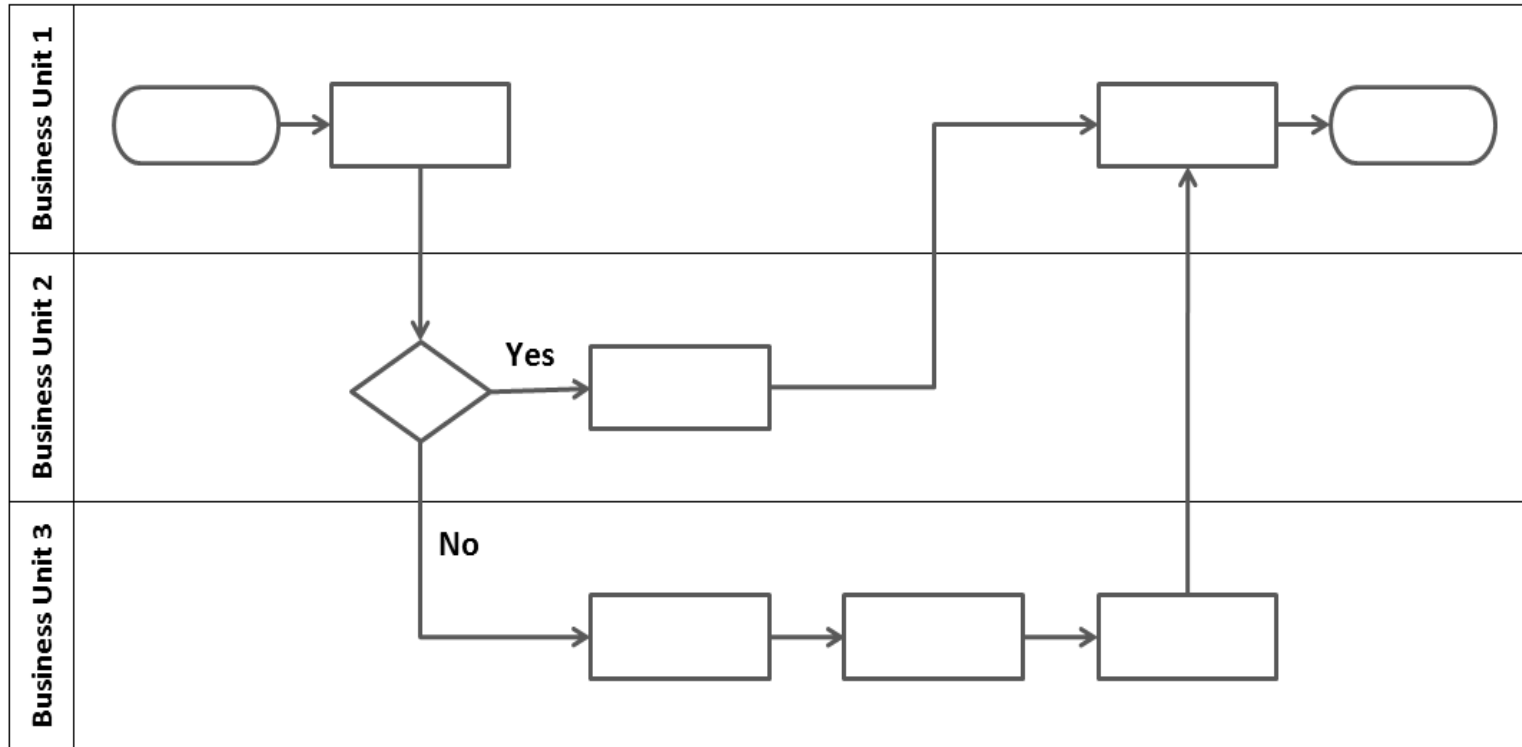

# How to Plot a Process Map

---

- Step 4: Identify and record the inputs/outputs and their corresponding specifications for each process step.
  - The process map helps in understanding and documenting  $Y=f(x)$  of a process where  $Y$  represents the outputs and  $x$  represents the inputs.
  - The inputs of each process step can be controllable or non-controllable, standardized operational procedure, or noise. They are the source of variation in the process and need to be analyzed qualitatively and quantitatively in order to identify the vital few inputs that have significant effect on the outcome of the process.
  - The outputs of each process step can be products, information, services, etc. They are the little  $Y$ 's within the process.



# How to Plot a Process Map


---

- Step 5: Evaluate the process map and adjust it if needed.
  - If the process is too complicated to be covered in one single process map, you may create additional detailed sub-process maps for further information.
  - Number the process steps in the order of their occurrence for clarity.



# High Level Process Map

- Most high-level business process maps are also referred to as **flow charts**.
- The key to a high-level process map is to over-simplify the process being depicted so that it can be understood in its most generic form.
- As a general rule, high-level process maps should be 4–6 steps and no more.
- Below is an oversimplified version of a high-level process map for cooking a 10lb prime rib for a dozen holiday guests.

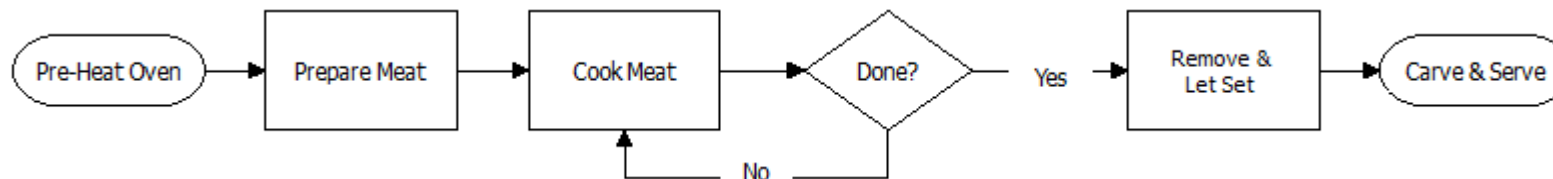

# Detailed Process Map

---


- Detailed process maps or multi-level maps take the high-level map much further.
- Detailed maps can be two, three, or more levels deeper than your high-level process map.
- A good guideline used to help create the second level is to take each step in the high-level map and break it down into another two to four steps each (no more).
- Repeat this process (level 3, level 4 etc.) until reaching the desired level of detail.
- Some detailed maps are two or three levels deep, others can be five or six levels deep. Obviously, the deeper the levels, the more complex and the more burdensome.





# Functional Process Map

- The functional map adds dimension to the high-level or detailed map.
- The dimension added is identifying which function or job performs the step or makes the decision.
- Below is a generic example of a functional map. Note that functions are identified in horizontal "lanes" and each process step is placed in the appropriate lane based on which function performs the step.

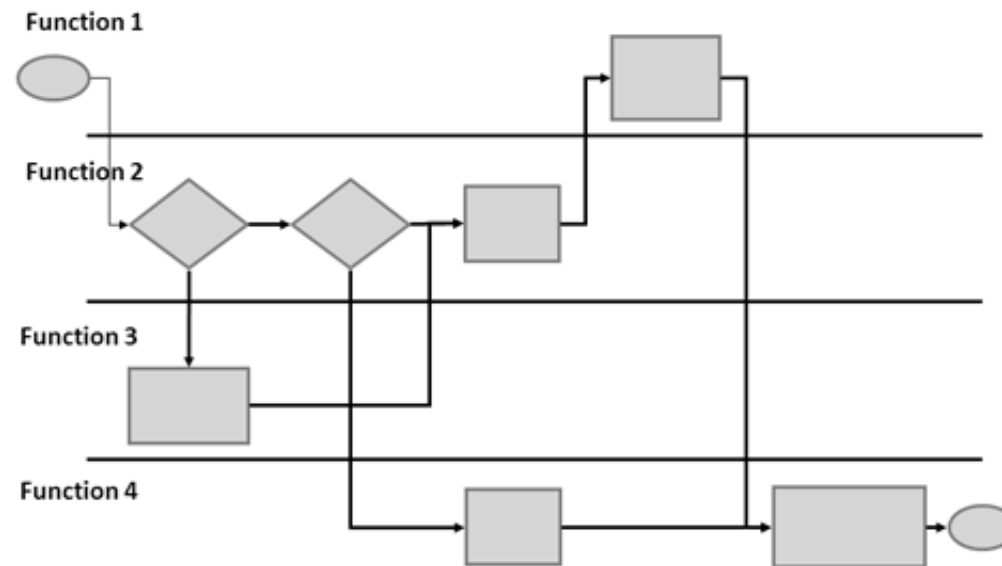

# What is SIPOC?

---

- A SIPOC (Suppliers-Input-Process-Output-Customers) is a high-level visualization tool to help identify and link the different components in a process.
- It is usually applied in the Measure phase in order to better understand the current state of the process and define the scope of the project.

# Key Components of a SIPOC

---

- **Suppliers:** vendors who provide the raw material, services, and information. Customers can also be suppliers sometimes.
- **Input:** the raw materials, information, equipment, services, people, environment involved in the process.
- **Process:** the high-level sequence of actions and decisions that results in the services or products delivered to the customers.
- **Output:** the services or products delivered to the customers and any other outcomes of the process.
- **Customers:** the end users or recipients of the services or products.



# How to Plot a SIPOC Diagram

---

- The first method:
  - Step 1: Create a template that can contain the information of the five key components in a clear way.
  - Step 2: Plot a high-level process map that covers five steps at maximum.
  - Step 3: Identify the outputs of the process.
  - Step 4: Identify the receipt of the process.
  - Step 5: Brainstorm the inputs required to run each process step.
  - Step 6: Identify the suppliers who provide the inputs.



# How to Plot a SIPOC Diagram

---

- The second method:
  - Step 1: Create a template that can contain the information of the five key components in a clear way.
  - Step 2: Identify the receipt of the process.
  - Step 3: Identify the outputs of the process.
  - Step 4: Plot a high-level process map that covers five steps at maximum.
  - Step 5: Brainstorm the inputs required to run each process step.
  - Step 6: Identify the suppliers who provide the inputs.



# Benefits of SIPOC Diagrams


---

- A SIPOC diagram provides more detailed information than process maps and it demonstrates how each component gets involved in the process.
- It helps visualize and narrow the project scope.
- It serves as a great communication tool to help different process owners understand the entire process, their specific roles and responsibilities.



# SIPOC Diagram Example

- Example of plotting a SIPOC diagram for Mom cooking scrambled eggs for two kids

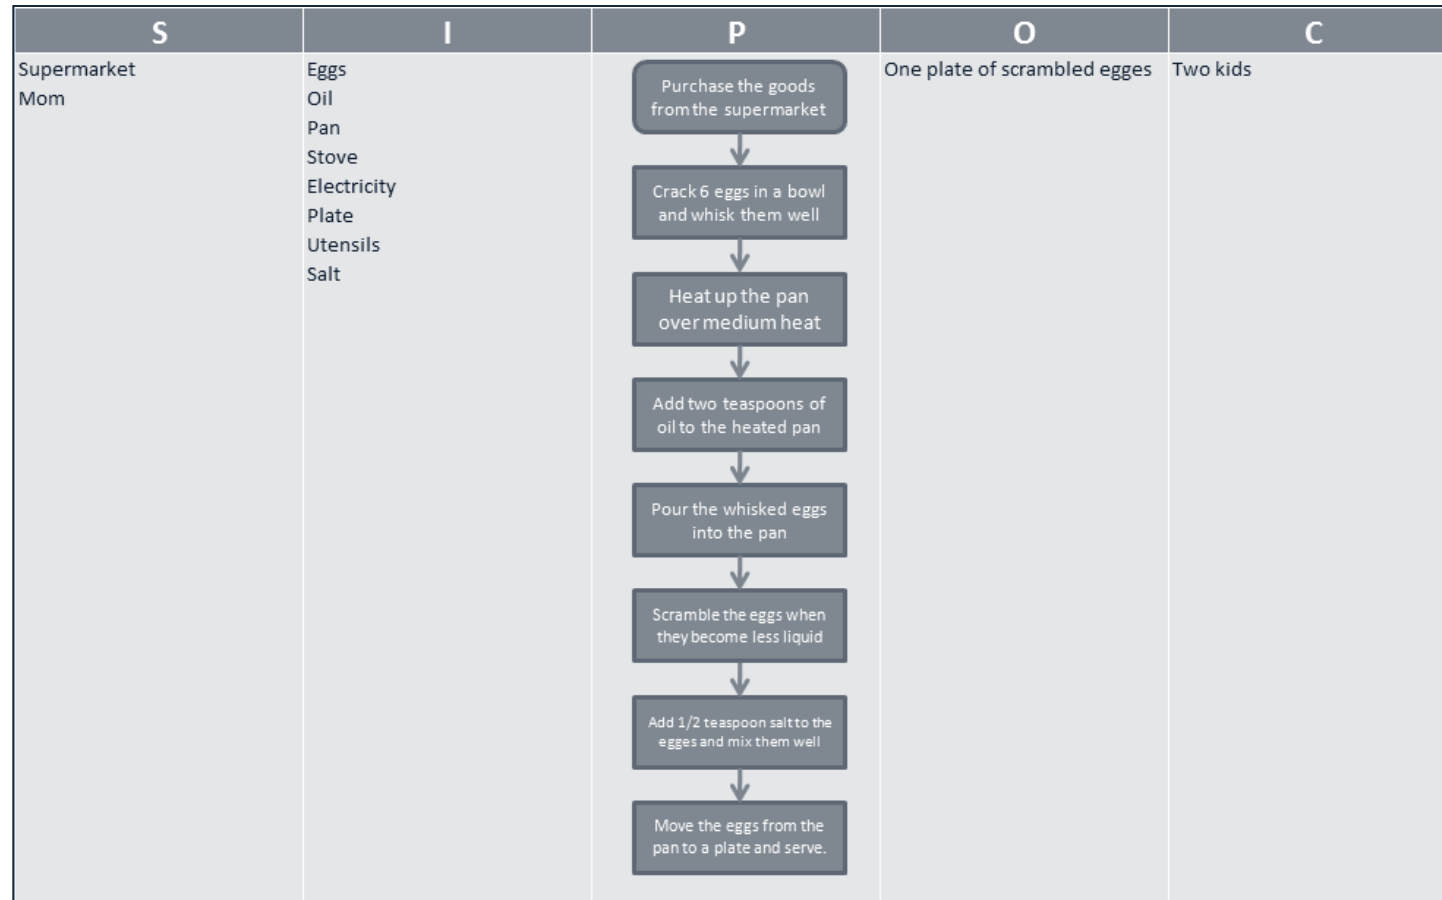

# Creating a SIPOC

- Step 1: Vertically List High-Level Process
  - If you followed the general rules for a high-level process map, then you should have no more than 4–6 steps for your process.
  - List those steps in a vertical manner as depicted below.

SUPPLIERS	INPUTS	PROCESS	OUTPUTS	CUSTOMERS
		Start		
		Step 1		
		Step 2		
		Step 3		
		Last Step		





# Creating a SIPOC

- Step 2: List Process Outputs

SUPPLIERS	INPUTS	PROCESS	OUTPUTS	CUSTOMERS
		Start		
		Step 1	Enter Step 1 Outputs	
		Step 2	Enter Step 2 Outputs	
		Step 3	Enter Step 3 Outputs	
		Last Step	Enter Step 4 Outputs	



# Creating a SIPOC

- Step 3: List Output Customers

SUPPLIERS	INPUTS	PROCESS	OUTPUTS	CUSTOMERS
		Start		
		Step 1	Enter Step 1 Outputs	Enter Step 1 Customers
		Step 2	Enter Step 2 Outputs	Enter Step 2 Customers
		Step 3	Enter Step 3 Outputs	Enter Step 3 Customers
		Last Step	Enter Step 4 Outputs	Enter Step 4 Customers



# Creating a SIPOC

- Step 4: List Process Inputs

SUPPLIERS	INPUTS	PROCESS	OUTPUTS	CUSTOMERS
		Start		
	Enter Step 1 Inputs	Step 1	Enter Step 1 Outputs	Enter Step 1 Customers
	Enter Step 2 Inputs	Step 2	Enter Step 2 Outputs	Enter Step 2 Customers
	Enter Step 3 Inputs	Step 3	Enter Step 3 Outputs	Enter Step 3 Customers
	Enter Step 4 Inputs	Last Step	Enter Step 4 Outputs	Enter Step 4 Customers



# Creating a SIPOC

- Step 5: List Suppliers of Inputs

SUPPLIERS	INPUTS	PROCESS	OUTPUTS	CUSTOMERS
		Start		
<b>Enter Step 1 Suppliers</b>	<b>Enter Step 1 Inputs</b>	Step 1	<b>Enter Step 1 Outputs</b>	<b>Enter Step 1 Customers</b>
<b>Enter Step 2 Suppliers</b>	<b>Enter Step 2 Inputs</b>	Step 2	<b>Enter Step 2 Outputs</b>	<b>Enter Step 2 Customers</b>
<b>Enter Step 3 Suppliers</b>	<b>Enter Step 3 Inputs</b>	Step 3	<b>Enter Step 3 Outputs</b>	<b>Enter Step 3 Customers</b>
<b>Enter Step 4 Suppliers</b>	<b>Enter Step 4 Inputs</b>	Last Step	<b>Enter Step 4 Outputs</b>	<b>Enter Step 4 Customers</b>



# SIPOC Benefits

---

- Visually communicate project scope
- Identify key inputs and outputs of a process
- Identify key suppliers and customers of a process
- Verify:
  - Inputs match outputs for upstream processes
  - Outputs match inputs for downstream processes.
- This type of mapping is effective for identifying opportunities for improvement of your process.
  
- If you have completed your high-level process map, follow the outlined steps to create a process map of **S**uppliers, **I**nputs, **P**rocess, **O**utputs, and **C**ustomer.

# What is Value Stream Mapping?

---

- **Value stream mapping** is a method to visualize and analyze the path of how information and raw materials are transformed into products or services customers receive.
- It is used to identify, measure, and decrease the non-value-adding steps in the current process.



# Non-Value-Added Activities

---

- **Non-value-adding activities** are activities in a process that do not add any other value to the products or services customers demand.
- Example of non-value-adding activities:
  - Rework
  - Overproduction
  - Excess transportation
  - Excess stock
  - Waiting
  - Unnecessary motion.
- Not all non-value-adding activities are unnecessary.



# How to Plot a Value Stream Map


---

- Plot the entire high-level process flow from when the customer places the order to when the customer receives the products or services in the end.
- A value stream map requires more detailed information for each step than the standard process map.
  - Cycle time
  - Preparation time
  - Actual working time
  - Available time
  - Scrap rate
  - Rework rate
  - Number of operators
- Assess the value stream map of current process, identify and eliminate the waste.





# Basic Value Stream Map Prototype

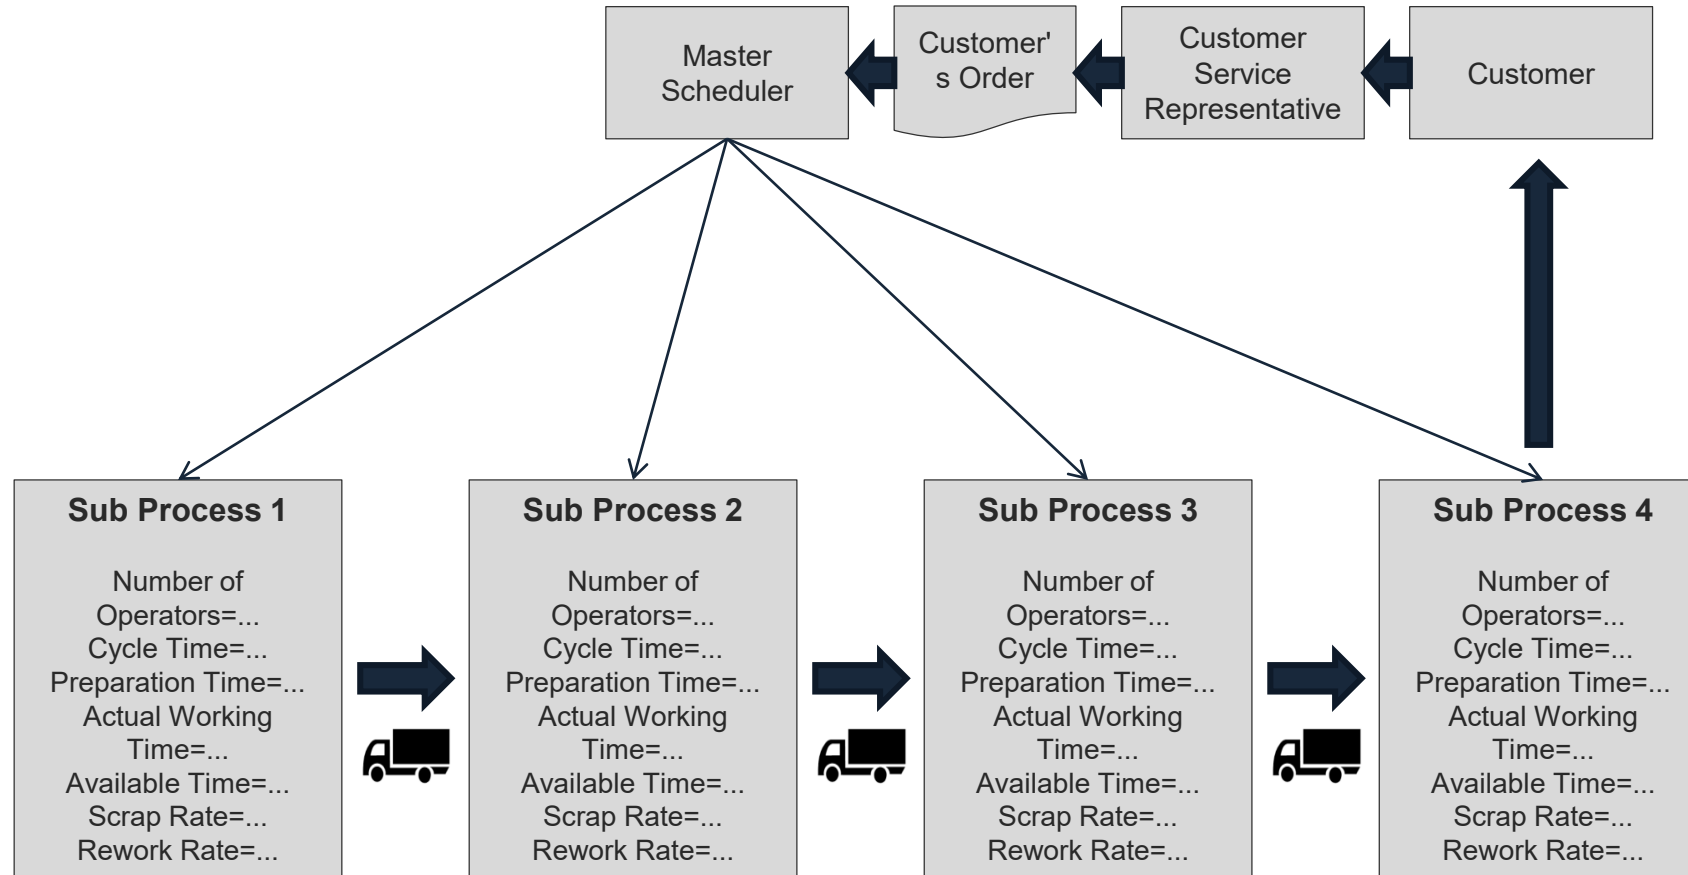

# Additional Mapping Techniques

---

- Spaghetti Chart
- Thought Process Mapping



# Spaghetti Chart

---

- A **spaghetti chart** is a graphical tool to map out the physical flow of materials, information, and people involved in a process. It can also reflect the distances between multiple workstations the physical flow has been through.
- A process that has not been streamlined has messy and wasteful movements of materials, information, and people, resembling a bowl of cooked spaghetti.


# How to Plot a Spaghetti Chart

---

- Step 1: Create a map of the work area layout.
- Step 2: Observe the current work flow and draw the actual work path from the very beginning of work to the end when products exit the work area.
- Step 3: Analyze the spaghetti chart and identify improvement opportunities.



# Spaghetti Chart Example

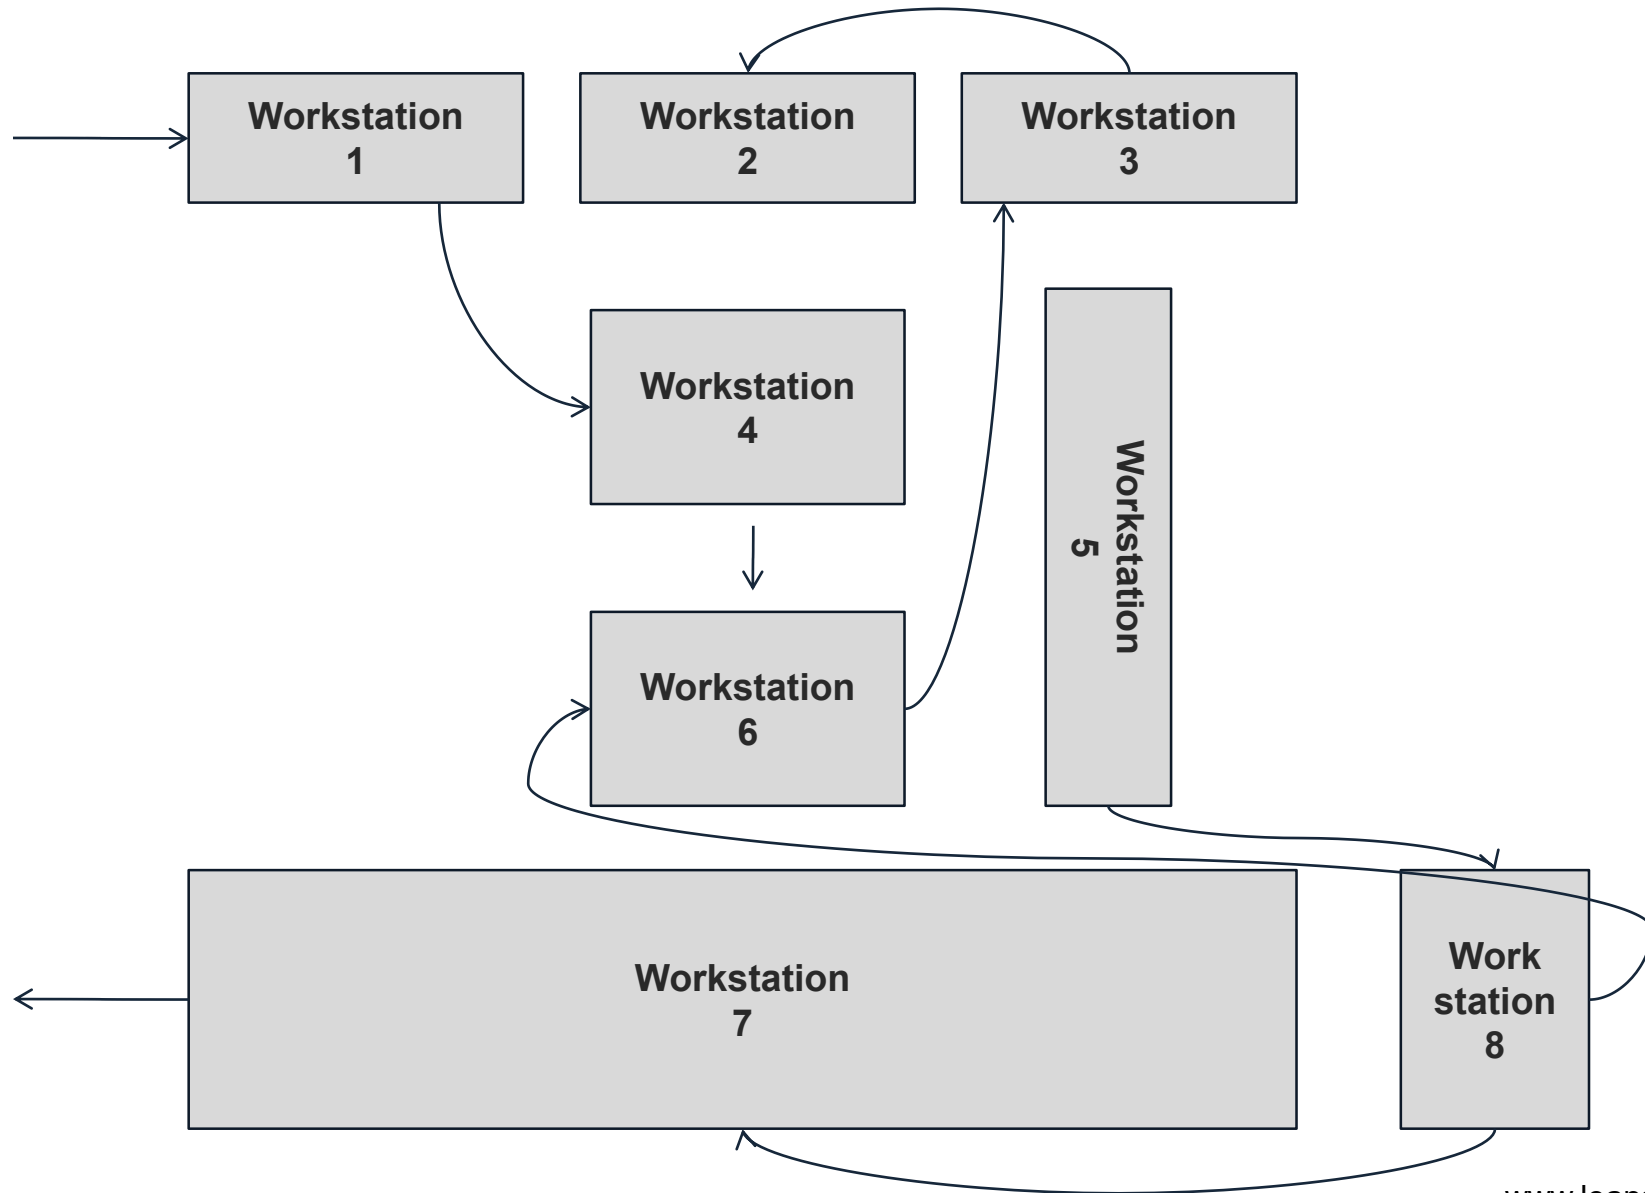

# Thought Process Mapping

---

- A **thought process map** is a graphical tool to help brainstorm, organize, and visualize the information, ideas, questions, or thoughts regarding reaching the project goal.
- It is a popular tool generally used at the beginning of a project in order to:
  - identify knowns and unknowns
  - communicate assumptions and risks
  - discover potential problems and solutions
  - identify resources, information, and actions required to meet the goal
  - present relationship of thoughts.




# How to Plot a Thought Process Map

---

- Step 1: Define the project goal.
- Step 2: Brainstorm knowns and unknowns about the project.
- Step 3: Brainstorm questions and group the unknowns and questions into five phases (**D**efine, **M**easure, **A**nalyze, **I**mprove, and **C**ontrol).
- Step 4: Sequence the questions below the project goal and link the related questions.
- Step 5: Identify tools or methods that would be used to answer the questions.
- Step 6: Repeat steps 3 to 5 as the project continues.



# Thought Process Map Example

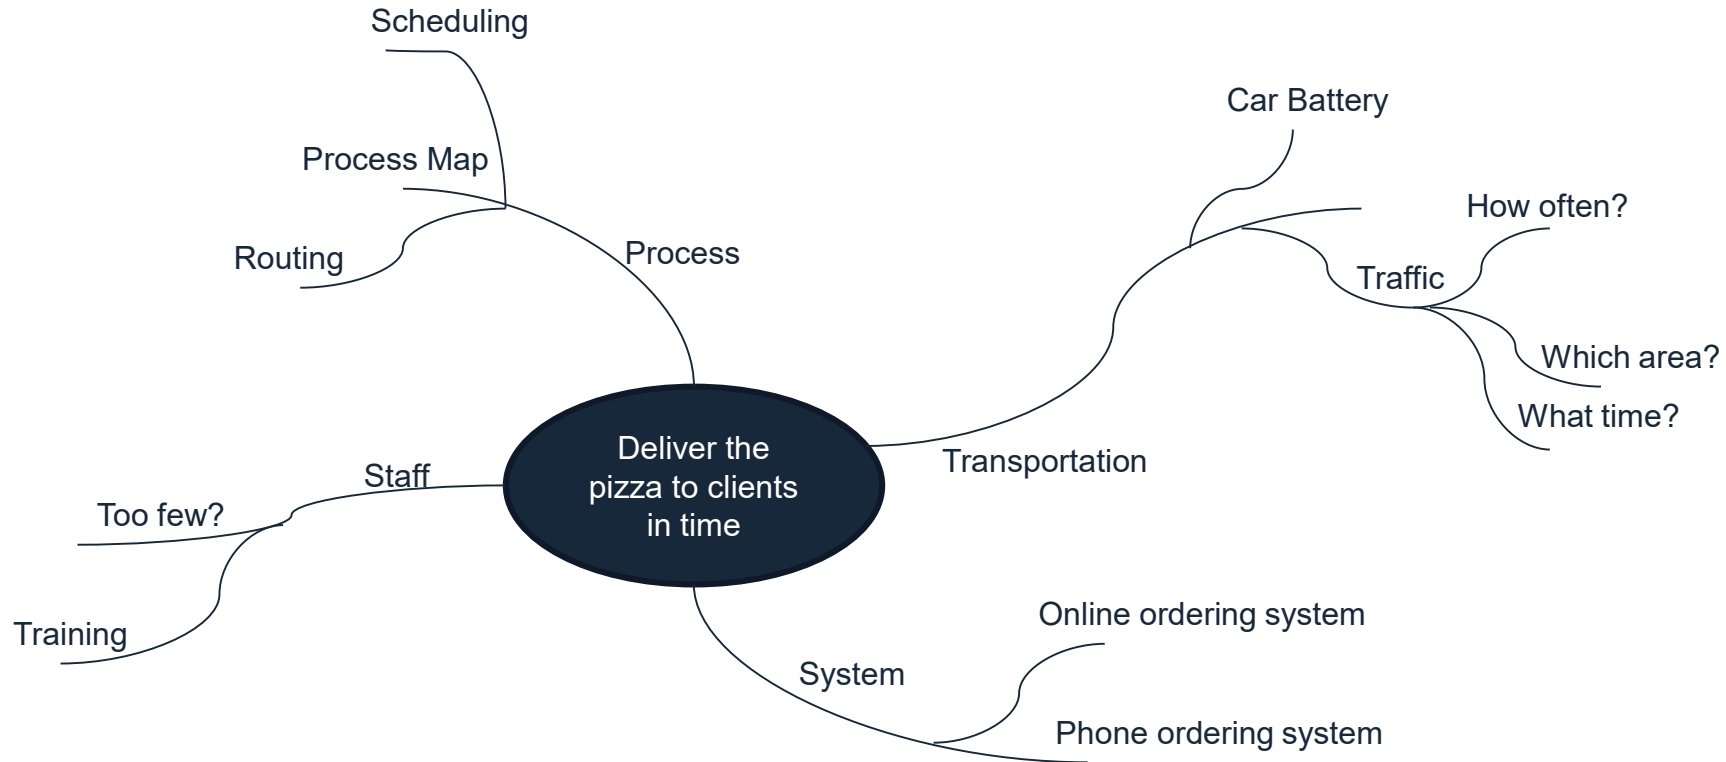



# 2.1.4 FMEA



# What is FMEA?

- The **FMEA (Failure Modes and Effects Analysis)** is an analysis technique to identify, evaluate, and prioritize a potential deficiency in a process so that the project team can design action plans to reduce the probability of the failure/deficiency occurring.

Failure Modes & Effects Analysis - FMEA

Product or Process Step	Potential Failure Mode	Potential Failure Effects	S	Potential Causes	O	Current Controls	D	RPN	Recommended Actions	Responsible	Actions Taken	S	O	D	RPN
								o							o
								o							o
								o							o
								o							o
								o							o
								o							o
								o							o
								o							o
								o							o
								o							o
								o							o
								o							o
								o							o
								o							o
								o							o
								o							o
								o							o
								o							o
								o							o
								o							o
								o							o

©Copyright Lean Sigma Corporation 2013

- FMEA is completed in cross-functional brainstorming sessions in which attendees have a good understanding of the entire process or of a segment of it.



# Basic FMEA Terms

---

- **Process Functions**

- Process steps depicted in the process map. FMEA is based on a process map and one step/function is analyzed at a time.

- **Failure Modes**

- Potential and actual failure in the process function/step. It usually describes the way in which failure occurs. There might be more than one failure mode for one process function.

- **Failure Effects**

- Impact of failure modes on the process or product. One failure mode might trigger multiple failure effects.

- **Failure Causes**

- Potential defect of the design that might result in the failure modes occurring. One failure mode might have multiple potential failure causes.

- **Current Controls**

- Procedures currently conducted to prevent failure modes from happening or to detect the failure mode occurring.



# Basic FMEA Terms

---

- **Severity Score**

- The seriousness of the consequences of a failure mode occurring.
- Ranges from 1 to 10, with 10 indicating the most severe consequence.

- **Occurrence Score**

- The frequency of the failure mode occurring.
- Ranges from 1 to 10, with 10 indicating the highest frequency.

- **Detection Score**

- How easily failure modes can be detected.
- Ranges from 1 to 10, with 10 indicating the most difficult detection.



# Basic FMEA Terms

---

- **RPN (Risk Prioritization Number)**
  - The product of the severity, occurrence, and detection scores.
  - Ranges from 1 to 1000.
  - The higher RPN is, the more focus the particular step/function needs.
- **Recommended Actions**
  - The action plan recommended to reduce the probability of failure modes occurring.



# How to Conduct an FMEA

---

- Step 1: List the critical functions of the process based on the process map created.
- Step 2: List all potential failure modes that might occur in each function. One function may have multiple potential failures.
- Step 3: List all potential failure effects that might affect the process or product.
- Step 4: List all possible causes that may lead to the failure mode happening.
- Step 5: List the current control procedures for each failure mode.

# How to Conduct an FMEA

---

- Step 6: Determine the severity rating for each potential failure mode.
- Step 7: Determine the occurrence rating for each potential failure cause.
- Step 8: Determine the detection rating for each current control procedure.
- Step 9: Calculate RPN (Risk Prioritization Number).
- Step 10: Rank the failures using RPN and determine the precedence of problems or critical inputs of the process. A Pareto chart might help to focus on the failure modes with high RPNs. The higher the RPN, the higher the priority the correction action plan.



# How to Conduct an FMEA

---

- Step 11: Brainstorm and create recommended action plans for each failure mode.
- Step 12: Determine and assign the task owner and projected completion date to take actions.
- Step 13: Determine the new severity rating if the actions are taken.
- Step 14: Determine the new occurrence rating if the actions are taken.
- Step 15: Determine the new detection rating if the actions are taken.
- Step 16: Update the RPN based on new severity, occurrence, and detection ratings.





# FMEA Example

---

## *Case study:*

- Joe is trying to identify, analyze, and eliminate the failure modes he experienced in the past when preparing his work bag before heading to the office every morning. He decides to run an FMEA for his process of work bag preparation.
- There are only two steps involved in the process.
  - Putting the work files in the bag
  - Putting a water bottle in the bag.

# FMEA Example

- Step 1: List the critical functions of the process based on the process map created.

Product or Process Step	Potential Failure Mode	Potential Failure Effects
Place files in bag		
Put water bottle in bag		

- Step 2: List all the potential failure modes for each function.

Product or Process Step	Potential Failure Mode	Potential Failure Effects
Place files in bag	Incorrect files put in the bag	
Put water bottle in bag	Water leaks	

- Step 3: List potential failure effects that might affect the process.

Product or Process Step	Potential Failure Mode	Potential Failure Effects
Place files in bag	Incorrect files put in the bag	Work is delayed
Put water bottle in bag	Water leaks	Files in bag damaged



# FMEA Example

- Step 4: List all possible causes to the failure mode.

Potential Failure Effects	S	Potential Causes	O
Work is delayed		Files are not organized well	
Files in bag damaged		Cap on water bottle not tight	

- Step 5: List any control procedures for each failure mode.

Potential Causes	O	Current Controls	D
Files are not organized well		Check if files are needed	
Cap on water bottle not tight		Check bottle cap before inserting	

- Step 6: Determine the severity rating for each failure mode.

Potential Failure Effects	S	Potential Causes	O	Current Controls
Work is delayed	9	Files are not organized well		Check if files are needed
Files in bag damaged	7	Cap on water bottle not tight		Check bottle cap before inserting



# FMEA Example

- Step 7: Determine the occurrence rating for each failure cause.

Potential Failure Effects	S	Potential Causes	O	Current Controls
Work is delayed	9	Files are not organized well	3	Check if files are needed
Files in bag damaged	7	Cap on water bottle not tight	5	Check bottle cap before inserting

- Step 8: Determine the detection rating for each control.

S	Potential Causes	O	Current Controls	D	RPN
9	Files are not organized well	3	Check if files are needed	5	135
7	Cap on water bottle not tight	5	Check bottle cap before inserting	5	175

- Step 9: Calculate the RPN (Risk Prioritization Number).

S	Potential Causes	O	Current Controls	D	RPN
9	Files are not organized well	3	Check if files are needed	5	135
7	Cap on water bottle not tight	5	Check bottle cap before inserting	5	175



# FMEA Example

- Step 10: Rank the failures using the RPN and determine the precedence of problems or critical inputs of process.

Current Controls	D	RPN	Recommended Actions
Check bottle cap before inserting	5	175	Organize & Categorize Files
Check if files are needed	5	135	Obtain new water bottle

- Step 11: Brainstorm and create recommended action plans.
- Step 12: Determine and assign owners with completion dates.

D	RPN	Recommended Actions	Responsible
5	175	Organize & Categorize Files	Joe
5	135	Obtain new water bottle	Joe



# FMEA Example

- Steps 13-15: Determine new severity, occurrence and detection ratings if actions are taken.

Recommended Actions	Responsible	Actions Taken	S	O	D	RPN
Organize & Categorize Files	Joe					0
Obtain new water bottle						
Recommended Actions	Responsible	Actions Taken	S	O	D	RPN
Organize & Categorize Files	Joe					0
Obtain new water bottle						
Recommended Actions	Responsible	Actions Taken	S	O	D	RPN
Organize & Categorize Files	Joe					0
Obtain new water bottle	Joe					0

- Step 16: Update RPN based on new ratings.

Recommended Actions	Responsible	Actions Taken	S	O	D	RPN
Organize & Categorize Files	Joe					0
Obtain new water bottle	Joe					0



# 2.1.5 Theory of Constraints



# What is the Theory of Constraints?

---

- Processes, systems, and organizations are vulnerable to their weakest part.
- Any manageable system is limited by constraints in its ability to produce more (and there is always at least one constraint).





# Performance Measures

---

Making sound financial decisions based on these three measures is a critical requirement.

- **Throughput** – rate at which a system generates money through sales.
- **Operational Expense** – money spent by the system to turn inventory into throughput.
- **Inventory** – money the system has invested in purchasing things it intends to sell.



# Five Focusing Steps

---

*Objective:* To ensure ongoing improvement efforts are focused on the constraints of a system.

1. Identify the system's constraint(s).
2. Decide how to exploit the constraint(s).
3. Subordinate everything else to the decision in step 2.
4. Elevate the constraint(s).
5. If in previous steps a constraint has been broken, return to step 1, but do not allow inertia to cause a system's constraint.



# Logical Thinking Processes

	Focusing Step	Thinking Process	Tools
1	Identify the system's constraint(s)	<ul style="list-style-type: none"> <li>Identify the problems</li> <li>Find the root causes</li> </ul>	Cause and effect diagram
2	Decide how to exploit the constraint(s)	<ul style="list-style-type: none"> <li>Develop a solution</li> </ul>	Future reality tree
3	Subordinate everything else to the decision in step 2	<ul style="list-style-type: none"> <li>Identify the conflict preventing the solution</li> <li>Remove the conflict</li> </ul>	Evaporating cloud
4	Elevate the constraint	<ul style="list-style-type: none"> <li>Construct and execute an implementation plan</li> </ul>	Prerequisite tree Transition tree
5	If in previous steps a constraint has been broken, return to step 1, but do not allow inertia to cause a system's constraint		




# Simulation Exercise

---

Resources needed:

- 3 “production line” participants
- 1 timer per each “production line” participant
- 5 small boxes of 15 widgets each (paperclips, pens/pencils, candy, etc.)

Widget Value Chain:

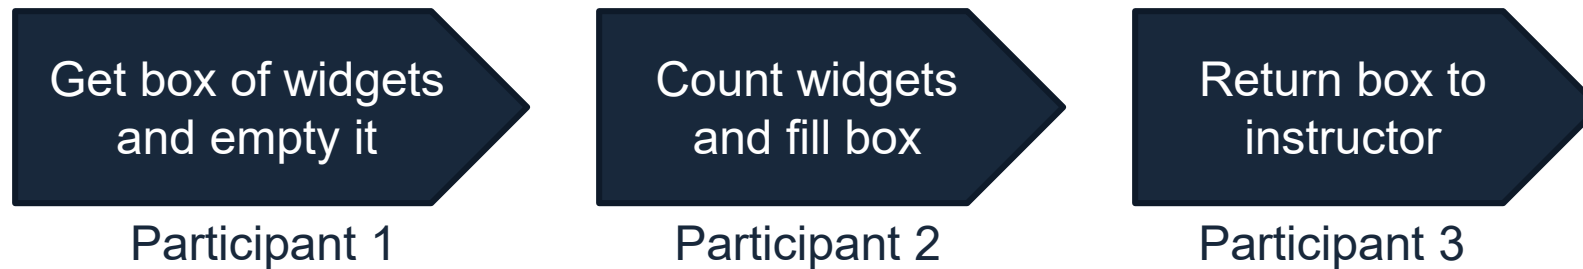

# Simulation Exercise

---

## Widget Value Chain:



### Five focusing steps:

1. Identify the system's constraint(s).
2. Decide how to exploit the constraint(s).
3. Subordinate everything else to the decision in step 2.
4. Elevate the constraint(s).
5. If in previous steps a constraint has been broken, return to step 1, but do not allow inertia to cause a system's constraint.

## 2.2 Six Sigma Statistics



# Yellow Belt Training: Measure Phase

---

## 2.1 Process Definition

- 2.1.1 Cause and Effect Diagrams
- 2.1.2 Cause and Effects Matrix
- 2.1.3 Process Mapping
- 2.1.4 FMEA: Failure Modes & Effects Analysis
- 2.1.5 Theory of Constraints

## 2.2 Six Sigma Statistics

- 2.2.1 Basic Statistics
- 2.2.2 Descriptive Statistics
- 2.2.3 Distributions and Normality
- 2.2.4 Graphical Analysis

## 2.3 Measurement System Analysis

- 2.3.1 Precision and Accuracy
- 2.3.2 Bias, Linearity, and Stability
- 2.3.3 Gage R&R
- 2.3.4 Variable and Attribute MSA

## 2.4 Process Capability

- 2.4.1 Capability Analysis
- 2.4.2 Concept of Stability
- 2.4.3 Attribute and Discrete Capability
- 2.4.4 Monitoring Techniques

## 2.2.1 Basic Statistics





# What is Statistics?

---

- **Statistics** is the science of collection, analysis, interpretation, and presentation of data.
- In Six Sigma, we apply statistical methods and principles to quantitatively measure and analyze the process performance to reach statistical conclusions and help solve business problems.



# Types of Statistics

---

- Descriptive Statistics
  - Describing what was going on
- Inferential Statistics
  - Making inferences from the data at hand to more general conditions

# Descriptive Statistics

---

- **Descriptive statistics** is applied to describe the main characteristics of a collection of data.
- Descriptive statistics summarizes the features of the data quantitatively.
- Descriptive statistics is descriptive only and it does not make any generalizations beyond the data at hand.
- The data used for descriptive statistics are for the purpose of representing or reporting.

# Inferential Statistics

---

- **Inferential statistics** is applied to infer the characteristics or relationships of the populations from which the data are collected.
- Inferential statistics draws statistical conclusions about the population by analyzing the sample data subject to random variation.
- A complete data analysis includes both descriptive statistics and inferential statistics.



# Statistics vs. Parameters

---

- The word *statistic* refers to a numeric measurement calculated using a sample data set, for example, sample mean or sample standard deviation. Its plural is *statistics* (the same spelling as “statistics” which refers to the scientific discipline).
- The *parameter* refers to a numeric metric describing the population, for example, population mean and population standard deviation. Unless you have the full data set of the population, you will not be able to know the population parameters.



# Continuous Variable vs. Discrete Variable

---

- Continuous Variable
  - Measured
  - There is an infinite number of values possible
  - Examples: temperature, height, weight, money, time
- Discrete Variable
  - Counted
  - There is a finite number of values available
  - Examples: count of people, count of countries, count of defects, count of defectives



# Types of Data

---

- Nominal
  - Categorical data
  - Examples: a set of colors, the social security number
- Ordinal
  - Rank-ordering data
  - Examples: the first, second place in a race, scores of exams
- Interval
  - Equidistant data
  - Examples: temperature with Fahrenheit or Celsius scale
- Ratio
  - The ratio between the magnitude of a continuous value and the unit value of the same category
  - Examples: weight, length, time



## 2.2.2 Descriptive Statistics





# Basics of Descriptive Statistics

---

- Descriptive statistics provides a quantitative summary for the data collected.
- It summarizes the main features of the collection of data.
  - Shape
  - Location
  - Spread
- It is a presentation of data collected and it does *not* provide any inferences about a more general condition.



# Shape of the Data

---

- **Distribution** is used to describe the shape of the data.
- Distribution (also called frequency distribution) summarizes the frequency of an individual value or a range of values of a variable (either continuous or discrete).
- Distribution is depicted as a table or graph.



# Shape of the Data

---

- Simple example of distribution
  - We are tossing a fair die. The possible value we obtain from each tossing is a value between 1 and 6.
  - Each value between 1 and 6 has a  $1/6$  chance to be hit for each tossing.
  - The distribution of this game describes the relationship between every possible value and the percentage of times the value is being hit (or count of times the value is being hit).

# Shape of the Data

---

- Examples of continuous distribution
  - Normal Distribution
  - T distribution
  - Chi-square distribution
  - F distribution
- Examples of discrete distribution
  - Binomial distribution
  - Poisson distribution



# Location of the Data

---

- The **location** (i.e. central tendency) of the data describes the value where the data tend to cluster around.
- There are multiple measurements to capture the location of the data:
  - Mean
  - Median
  - Mode.

# Mean

---

- The **mean** is the arithmetic average of a data set.

$$\bar{x} = \frac{1}{n} \sum_{i=1}^n x_i$$

$n$  is the number of values in the data set

- For example, we have a set of data: 2, 3, 5, 8, 5, and 9. The arithmetic mean of the data set is

$$\frac{2+3+5+8+5+9}{6} = 5.33$$

# Median

---

- The **median** is the middle value of the data set in numeric order.
- It separates the finite set of data into two parts: one with values higher than the median and the other with values lower than the median.
- For example, we have a set of data: 45, 32, 67, 12, 37, 54, and 28. The median is 37 since it is the middle value of the sorted list of values (i.e., 12, 28, 32, 37, 45, 54, and 67).



# Mode

---

- The **mode** is the value that occurs most often in the data set.
- If no number is repeated, there is no mode for the data set.
- For example, we have a data set: 55, 23, 45, 45, 68, 34, 45, 55. The mode is 45 since it occurs most frequently.





# Spread of the Data

---

- The **spread** (i.e. variation) of the data describes the degree of data dispersing around the center value.
- There are multiple measurements to capture the spread of the data:
  - Range
  - Variance
  - Standard Deviation.

# Range

---

- The **range** is the numeric difference between the greatest and smallest values in a data set.
- Only two data values (i.e., the greatest and the smallest values) are accounted for calculating the range.
- For example, we have a set of data: 34, 45, 23, 12, 32, 78 and 23. The range of the data is  $78 - 12 = 66$ .

# Variance

---

- The **variance** measures how far on average the data points spread out from the mean.
- It is the average squared deviation of each value from its mean.
- All the data points are accounted for calculating the variance.

$$s^2 = \frac{1}{n} \sum_{i=1}^n (x_i - \bar{x})^2$$

where

$n$  is the number of values in the data set

$$\bar{x} = \frac{1}{n} \sum_{i=1}^n x_i$$

# Standard Deviation

---

- **Standard deviation** describes how far the data points spread away from the mean.
- It is simply the square root of the variance.
- All the data points are accounted for calculating the standard deviation.

$$s = \sqrt{\frac{1}{n} \sum_{i=1}^n (x_i - \bar{x})^2}$$

where

$n$  is the number of values in the data set

$$\bar{x} = \frac{1}{n} \sum_{i=1}^n x_i$$

## 2.2.3 Normal Distribution & Normality



# What is Normal Distribution?

---

- The **normal distribution** is a probability distribution of a continuous random variable whose values spread symmetrically around the mean.
- A normal distribution can be completely described by using its mean ( $\mu$ ) and variance ( $\sigma^2$ ).
- When a variable  $x$  is normally distributed, we denote  $x \sim N(\mu, \sigma^2)$ .



# Z Distribution

---

- The **Z distribution** is the simplest normal distribution with the mean equal to zero and the variance equal to one.
- Any normal distribution can be transferred to a Z distribution by applying

$$z = \frac{x - \mu}{\sigma}$$

where

$$x \sim N(\mu, \sigma^2) \quad \sigma \neq 0$$

# Z Score

---

- The **Z Score** is the measure of how many standard deviations an observation is above or below the mean.
- Positive Z Scores indicate the observation is above the mean or “right of the mean”.
- Negative Z Scores indicate the observation is below the mean of “left of the mean”
- Calculate Z Score using the formula below:

$$Z = \frac{x - \mu}{\sigma}$$

where

x is the observation

$\mu$  is the mean of the population

$\sigma$  is the standard deviation of the population






# Shape of Normal Distribution

- The probability density function curve of normal distribution is bell-shaped.
- Probability density function of normal distribution

$$f(x) = \frac{1}{\sqrt{2\pi\sigma^2}} e^{-\frac{(x-\mu)^2}{2\sigma^2}}$$

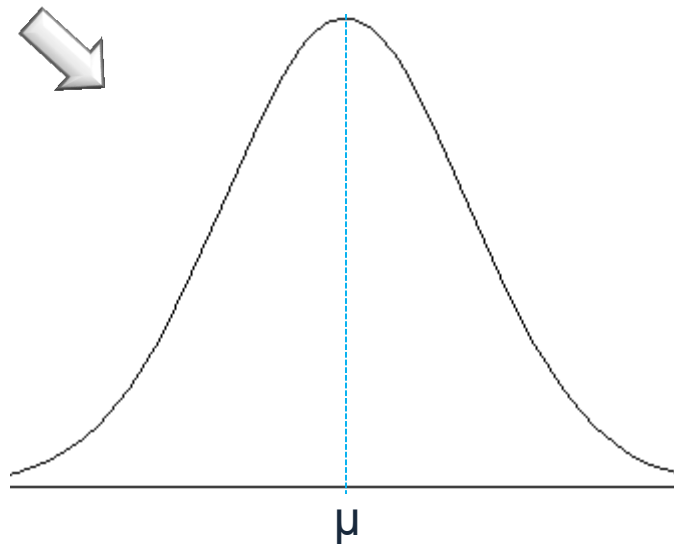

# Location of Normal Distribution

---

- If a variable is normally distributed, the mean, the median, and the mode have the same value.
- The probability density curve of normal distribution is symmetric around a center value which is the mean, the median, and the mode at the same time.



# Spread of Normal Distribution

---

- The spread or variation of the normally-distributed data can be described using the variance or the standard deviation.
- The smaller the variance or the standard deviation, the less variability in the data set.



# 68-95-99.7 Rule


---

- The 68-95-99.7 rule or the *empirical rule in statistics* states that for a normal distribution:
  - About 68% of the data fall within one standard deviation of the mean
  - About 95% of the data fall within two standard deviations of the mean
  - About 99.7% of the data fall within three standard deviations of the mean.



# 68-95-99.7 Rule

---

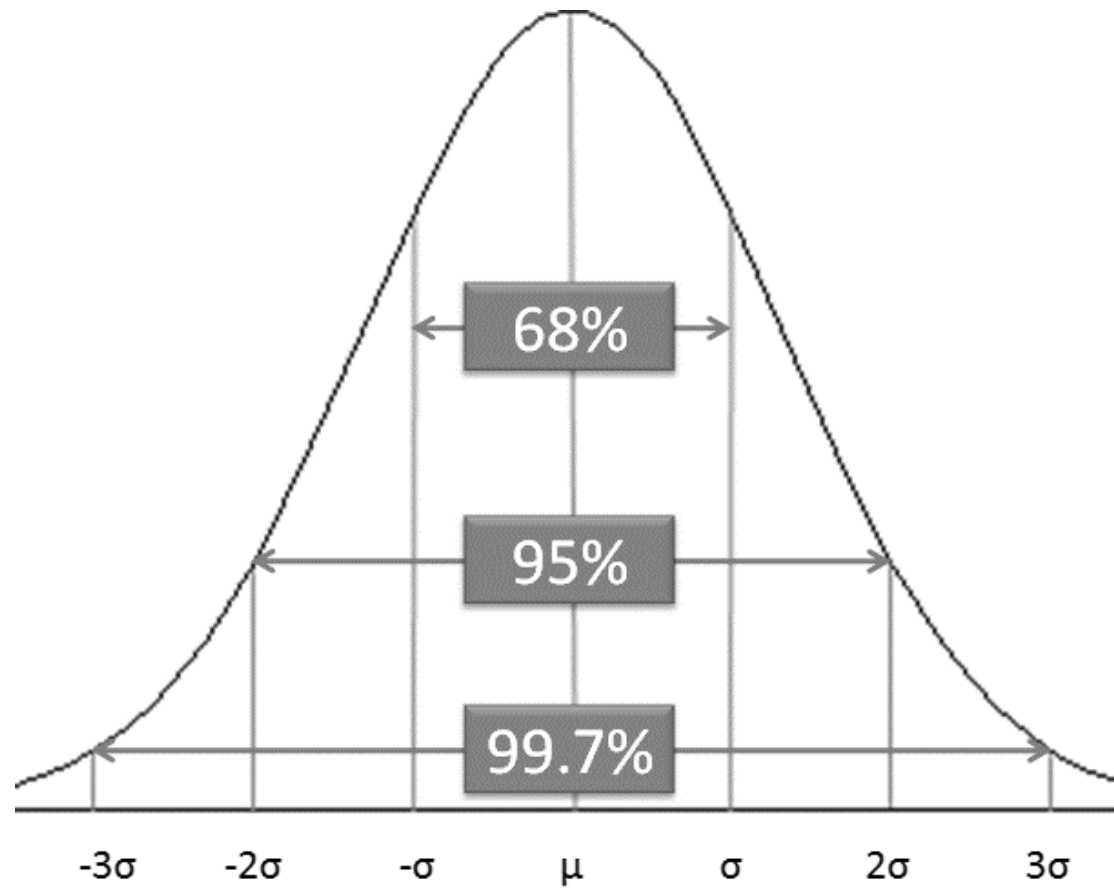

# Normality

---

- Not all the distributions with a bell shape are normal distributions.
- To check whether a group of data points are normally distributed, we need to run a *normality test*.
- There are different normality tests available:
  - Anderson-Darling test
  - Shapiro-Wilk test
  - Jarque-Bera test.
- More details of normality test will be introduced in the Analyze module.


# Normality Testing

---

- To check whether the population of our interest is normally distributed, we need to run normality test.
  - Null Hypothesis ( $H_0$ ): The data points *are* normally distributed.
  - Alternative Hypothesis ( $H_a$ ): The data points are *not* normally distributed.
- There are many normality tests available. For example, Anderson-Darling test, Sharpiro-Wilk test, Jarque-Bera test, and so on.

# Use Minitab to Run a Normality Test

---



- Case study: we are interested to know whether the height of basketball players is normally distributed.
- Data File: “One Sample T-Test” tab in “Sample Data.xlsx”

- Null Hypothesis ( $H_0$ ): the height of basketball players is normally distributed.
- Alternative Hypothesis ( $H_a$ ): the height of basketball players is not normally distributed.



# Use Minitab to Run a Normality Test

---

- Steps to run a normality test in Minitab
  - 1) Click Stat → Basic Statistics → Normality Test.
  - 2) A new window named “Normality Test” pops up.
  - 3) Select “HtBk” as the “Variable.”
  - 4) Click “OK.”
  - 5) The normality test results appear in the new window.




# Use Minitab to Run a Normality Test

The image shows a sequence of three screenshots from the Minitab software interface. The first screenshot shows the 'Stat' menu with 'Basic Statistics' expanded, and 'Normality Test...' selected. An arrow points to the second screenshot, which is the 'Normality Test' dialog box. In this dialog, the 'Variable' field is empty, and the 'Tests for Normality' section has 'Anderson-Darling' selected. A second arrow points to the third screenshot, which is the same 'Normality Test' dialog box, but now the 'Variable' field contains the text 'HTBK'.



# Use Minitab to Run a Normality Test

- Null Hypothesis ( $H_0$ ): The data are normally distributed.
- Alternative Hypothesis ( $H_a$ ): The data are not normally distributed.
- Since the p-value of the normality is 0.275 greater than alpha level (0.05), we fail to reject the null and claim that the data are normally distributed.

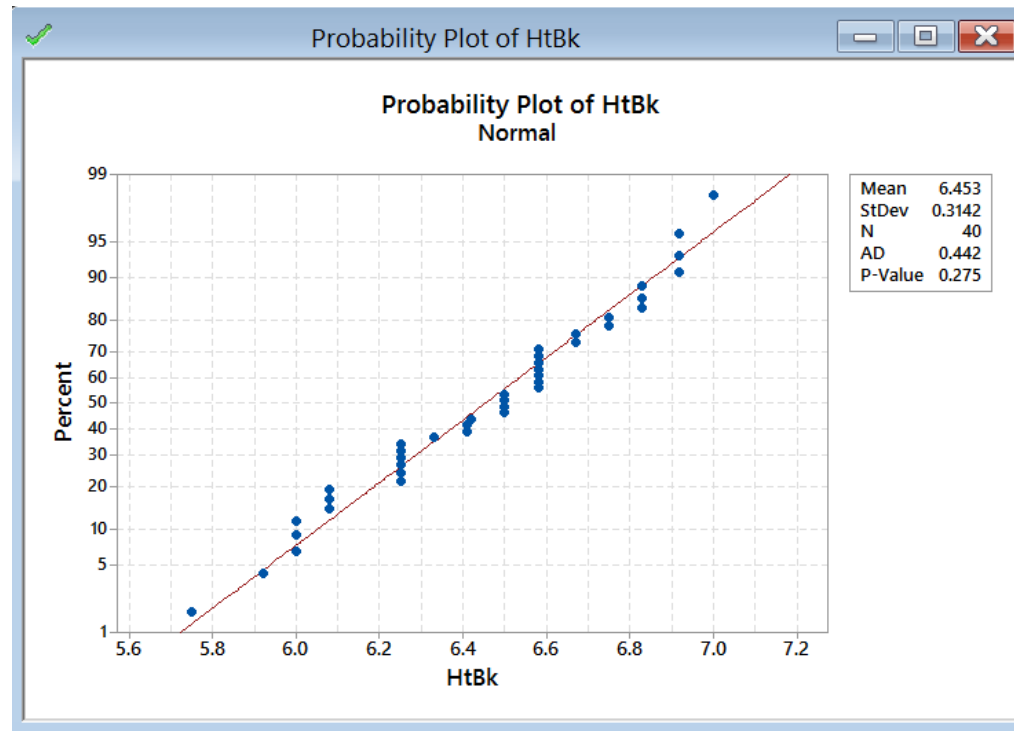

## 2.2.4 Graphical Analysis



# What is Graphical Analysis?

---

- In statistics, **graphical analysis** is a method to visualize the quantitative data.
- Graphical analysis is used to discover the structure and patterns in the data, explaining and presenting the statistical conclusions.
- A complete statistical analysis includes both quantitative analysis and graphical analysis.



# Graphical Analysis Example

---

- There are various graphical analysis tools available. Here are four most commonly used examples:
  - Box Plot
  - Histogram
  - Scatter Plot
  - Run Chart.




# Box Plot

---

- A **box plot** is a graphical method to summarize a data set by visualizing the minimum value, 25<sup>th</sup> percentile, median, 75<sup>th</sup> percentile, the maximum value, and potential outliers.
- A percentile is the value below which a certain percentage of data fall. For example, if 75% of the observations have values lower than 685 in a data set, then 685 is the 75<sup>th</sup> percentile of the data.



# Box Plot

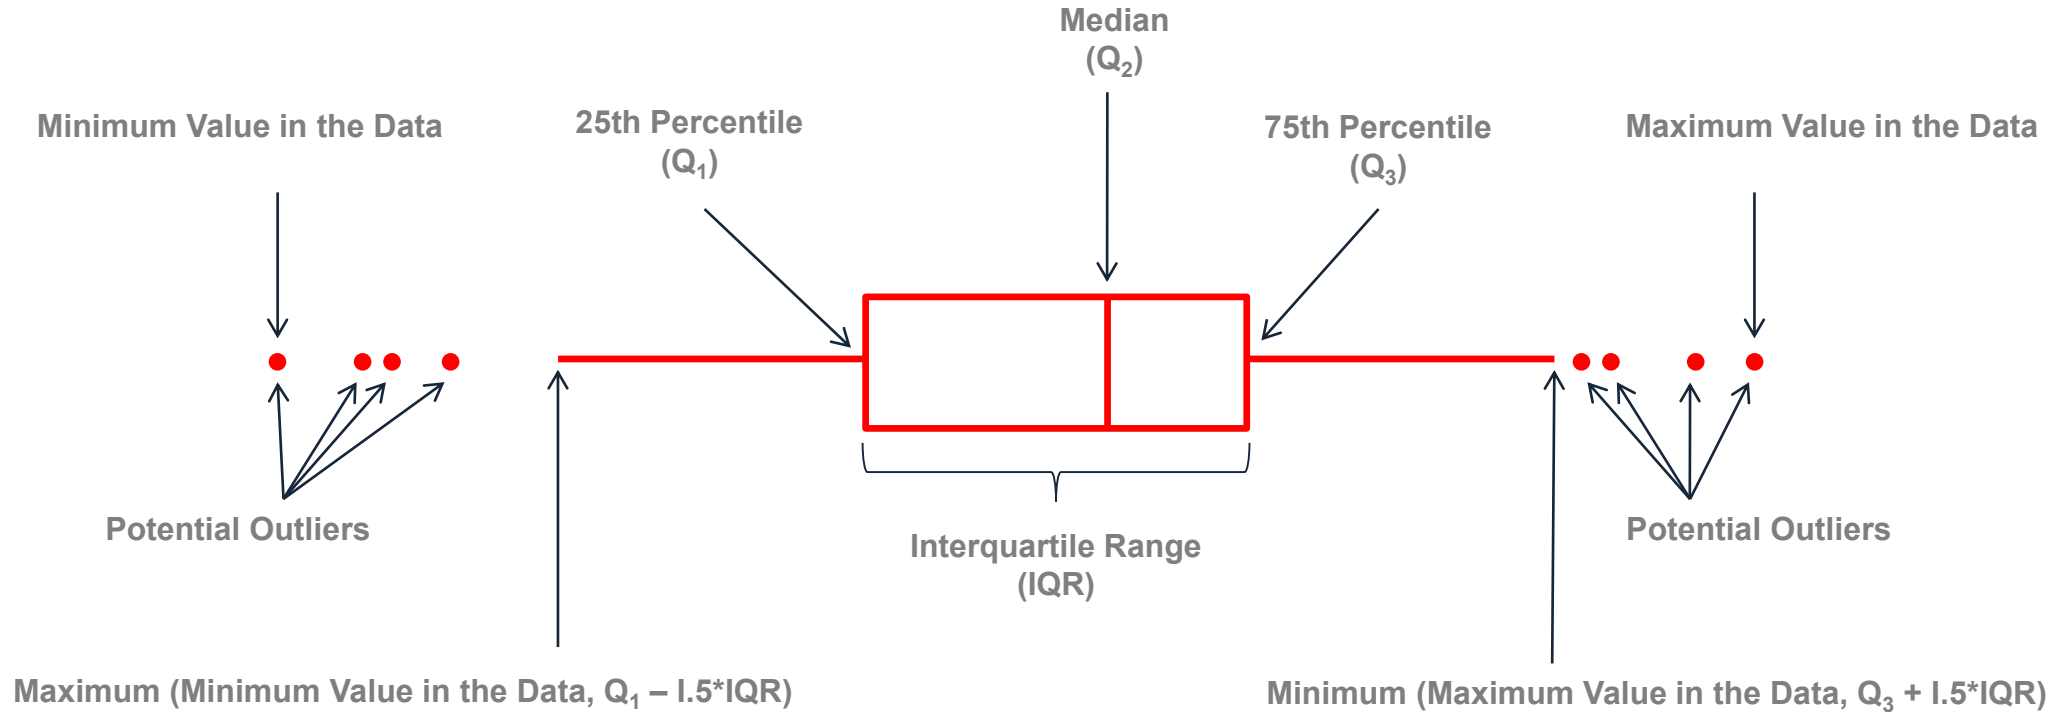

$$\text{Interquartile Range} = 75^{\text{th}} \text{ Percentile} - 25^{\text{th}} \text{ Percentile}$$




# How to Use Minitab to Generate a Box Plot

---


- Data File: “Box Plot” tab in “Sample Data.xlsx”
- Steps to render a Box Plot in Minitab
  - 1) Click Graph → Boxplot.
  - 2) A new window named “Boxplots” pops up.
  - 3) Click “OK” in the window “Boxplots.”
  - 4) Another new window named “Boxplot – One Y, Simple” pops up.
  - 5) Select “HtBk” as the “Graph Variables.”
  - 6) Click the “Data View” button and a new window named “Boxplot – Data View” pops up.
  - 7) Check the boxes “Median symbol” and “Mean symbol.”
  - 8) Click “OK” in the window “Boxplot – Data View.”
  - 9) Click “OK” in the window “Boxplot – One Y, Simple.”
  - 10) The box plot appears automatically in the new window.



# How to Use Minitab to Generate a Box Plot

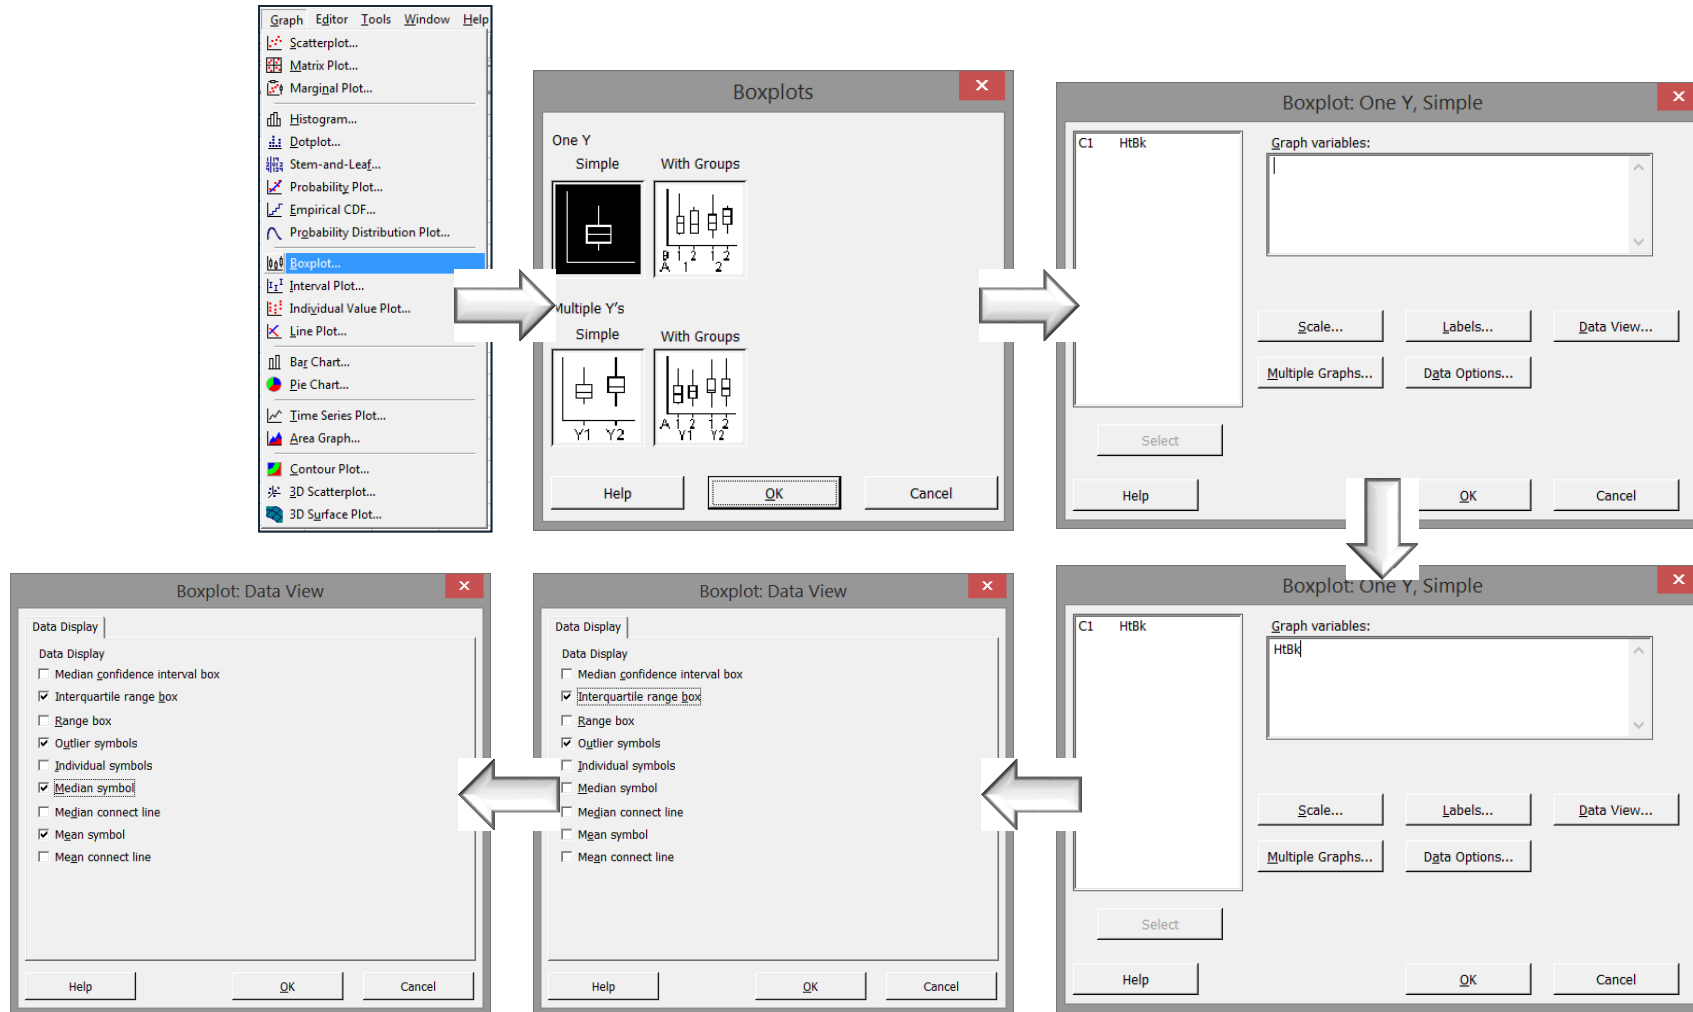

# How to Use Minitab to Generate a Box Plot

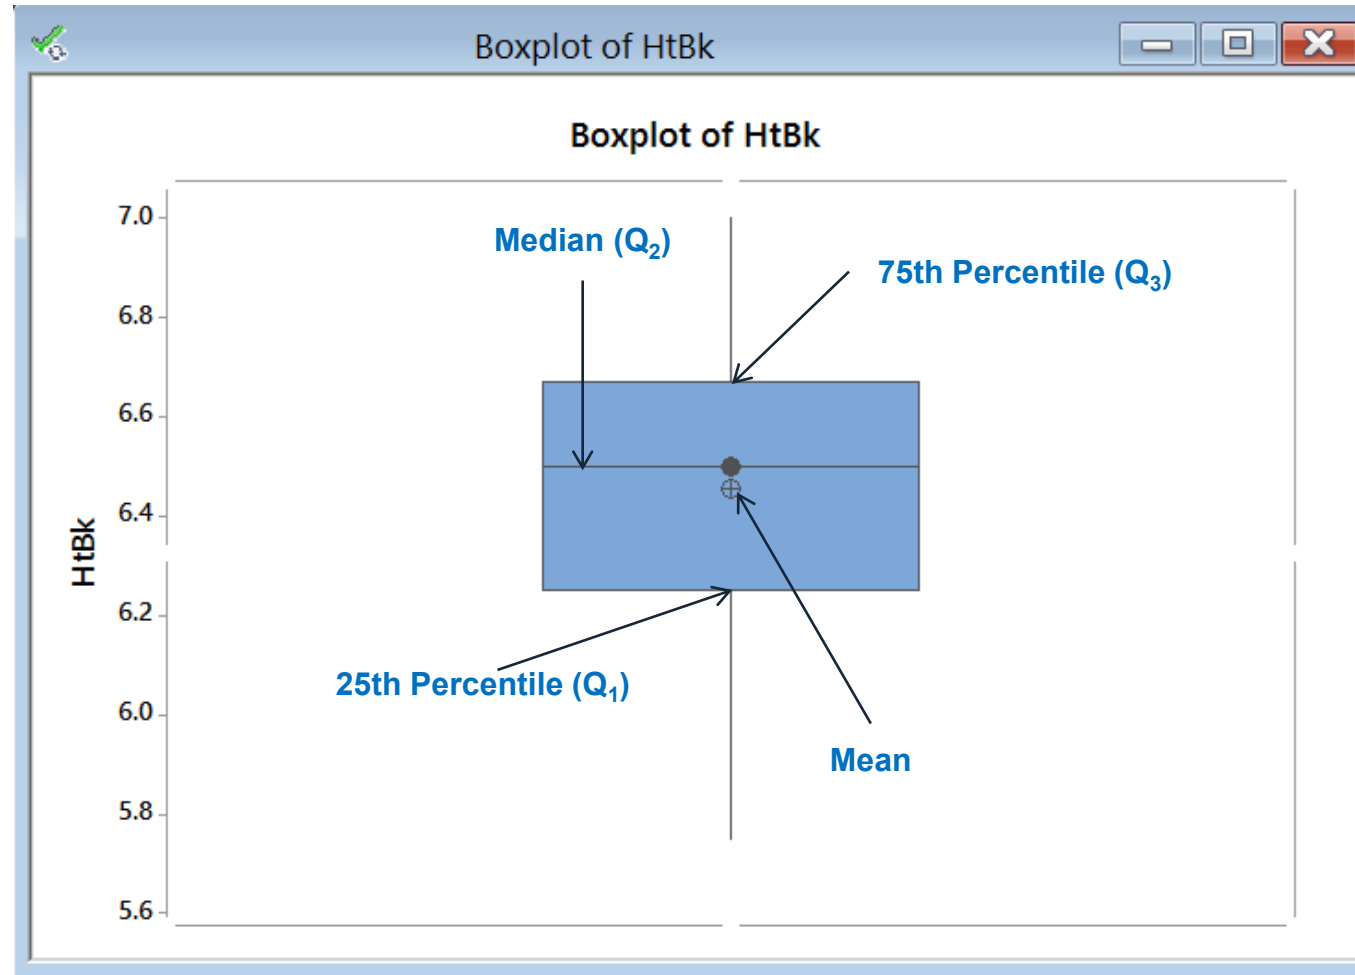

# Histogram

---


- A **histogram** is a graphical tool to present the distribution of the data.
- The X axis represents the possible values of the variable and the Y axis represents the frequency of the value occurring.
- A histogram consists of adjacent rectangles erected over intervals with heights equal to the frequency density of the interval.
- The total area of all the rectangles in a histogram is the number of data values.

# Histogram

---


- A histogram can also be normalized. In this case, the X axis still represents the possible values of the variable, but the Y axis represents the percentage of observations that fall into each interval on the X axis.
- The total area of all the rectangles in a normalized histogram is 1.
- With the histogram, we have a better understanding of the shape, location, and spread of the data.

# Histogram

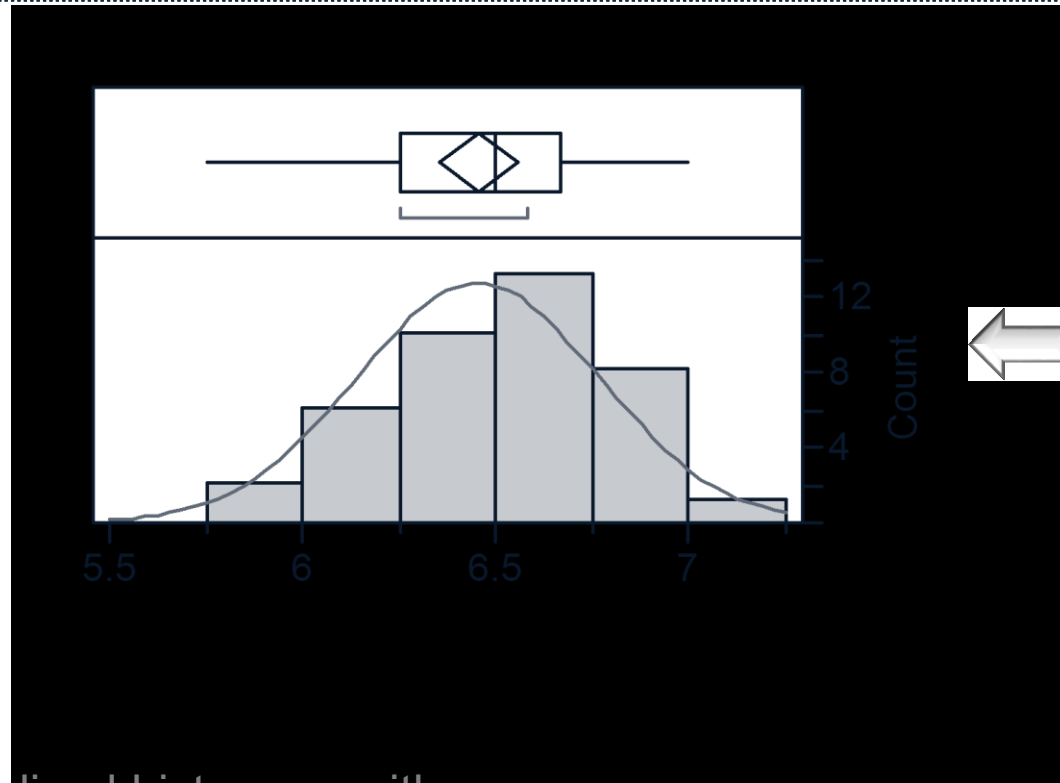

Histogram with frequency (count) as the Y axis

Normalized histogram with proportion (probability) as the Y axis

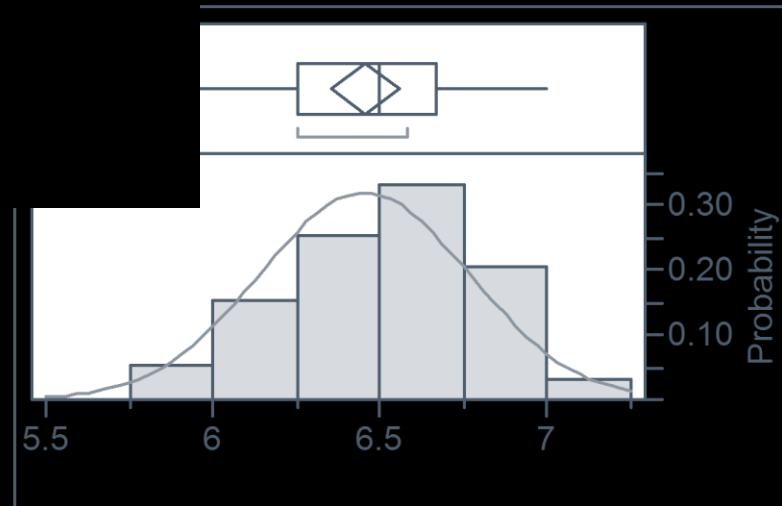

# How to Use Minitab to Generate a Histogram

---

- Data File: “Histogram” tab in “Sample Data.xlsx”
- Steps to render a histogram in Minitab
  - 1) Click Stat → Basic Statistics → Graphical Summary.
  - 2) A new window named “Graphical Summary” pops up.
  - 3) Select “HtBk” as the “Variables.”
  - 4) Click “OK.”
  - 5) The histogram appears in the new window.



# How to Use Minitab to Generate a Histogram

The image illustrates the steps to generate a histogram in Minitab. It shows the 'Stat' menu with 'Graphical Summary...' selected. An arrow points to the 'Graphical Summary' dialog box, which is initially empty. A second arrow points to the same dialog box after the variable 'HTBk' has been entered in the 'Variables:' field. The 'Confidence level' is set to 95.0.

Stat Graph Editor Tools Window Help Assistant

- Basic Statistics
- Regression
- ANOVA
- DOE
- Control Charts
- Quality Tools
- Reliability/Survival
- Multivariate
- Time Series
- Tables
- Nonparametrics
- Equivalence Tests
- Power and Sample Size

Display Descriptive Statistics...  
Store Descriptive Statistics...  
Graphical Summary...  
1-Sample Z...  
1-Sample t...  
2-Sample t...  
Paired t...  
1 Proportion...  
2 Proportions...  
1-Sample Poisson Rate...  
2-Sample Poisson Rate...  
1 Variance...  
2 Variances...  
Correlation...  
Covariance...  
Normality Test...  
Outlier Test...  
Goodness-of-Fit Test for Poisson...

Graphical Summary

C1 HTBk

Variables:

By variables (optional):

Confidence level: 95.0

Select

Help OK Cancel

Graphical Summary

C1 HTBk

Variables:

HTBk

By variables (optional):


Confidence level: 95.0

Select

Help OK Cancel



# How to Use Minitab to Generate a Histogram

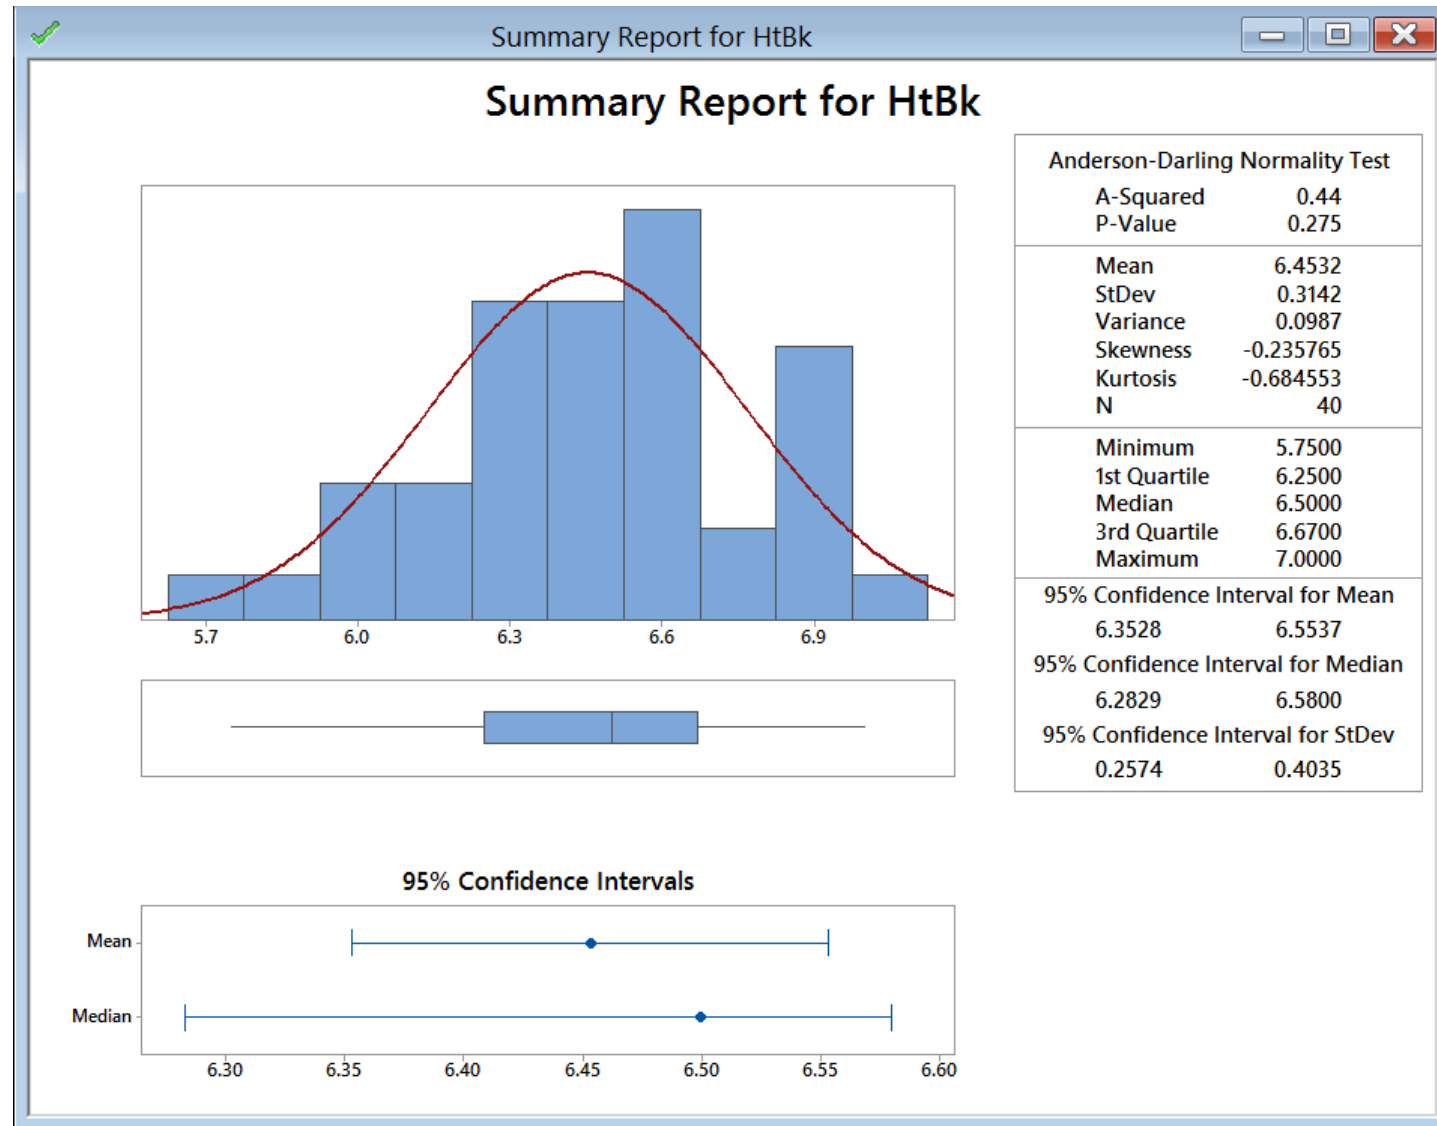

# Scatter Plot

---

- A **scatter plot** is a diagram to present the relationship between two variables of a data set.
- A scatter plot consists of a set of data points.
- On the scatter plot, a single observation is presented by a data point with its horizontal position equal to the value of one variable and its vertical position equal to the value of the other variable.



# Scatter Plot

---

- A scatter plot helps to understand:
  - Whether the two variables are related to each other or not
  - How is the strength of their relationship
  - What is the shape of their relationship
  - What is the direction of their relationship
  - Whether outliers are present.



# How to Use Minitab to Generate a Scatter Plot

---

- Data File: “Scatter Plot” tab in “Sample Data.xlsx”
- Steps to render a histogram in Minitab:
  - 1) Click Graph → Scatterplot.
  - 2) A new window named “Scatterplots” pops up.
  - 3) Click “OK” in the window “Scatterplots” and another window named “Scatterplot – Simple” pops up.
  - 4) Select “MPG” as the “Y variables.”
  - 5) Select “weight” as the “X variables.”
  - 6) Click “OK.”
  - 7) The scatter plot appears in the new window.



# How to Use Minitab to Generate a Scatter Plot

The image illustrates the steps to create a scatter plot in Minitab. It shows the 'Graph' menu with 'Scatterplot...' selected. The 'Scatterplots' dialog box is open, showing options like 'Simple', 'With Groups', 'With Regression', and 'With Regression and Groups'. The 'Simple' option is selected. The 'Scatterplot: Simple' dialog box is shown twice, with the first one having 'MPG' in the 'Y variables' column and 'weight' in the 'X variables' column. The second dialog box is identical but with empty fields for 'Y variables' and 'X variables'.

**Graph** Editor Tools Window

- Scatterplot...
- Matrix Plot...
- Bubble Plot...
- Marginal Plot...
- Histogram...
- Dotplot...
- Stem-and-Leaf...
- Probability Plot...
- Empirical CDF...
- Probability Distribution Plot...
- Boxplot...
- Interval Plot...
- Individual Value Plot...
- Line Plot...
- Bar Chart...
- Pie Chart...
- Time Series Plot...
- Area Graph...
- Contour Plot...
- 3D Scatterplot...
- 3D Surface Plot...

**Scatterplots**

Simple With Groups With Regression With Regression and Groups

With Connect Line With Connect and Groups

Help OK Cancel

**Scatterplot: Simple**

	Y variables	X variables
1	MPG	weight
2		
3		
4		
5		
6		

Scale... Labels... Data View... Multiple Graphs... Data Options... Select Help OK Cancel


**Scatterplot: Simple**

	Y variables	X variables
1		
2		
3		
4		
5		
6		

Scale... Labels... Data View... Multiple Graphs... Data Options... Select Help OK Cancel



# How to Use Minitab to Generate a Scatter Plot

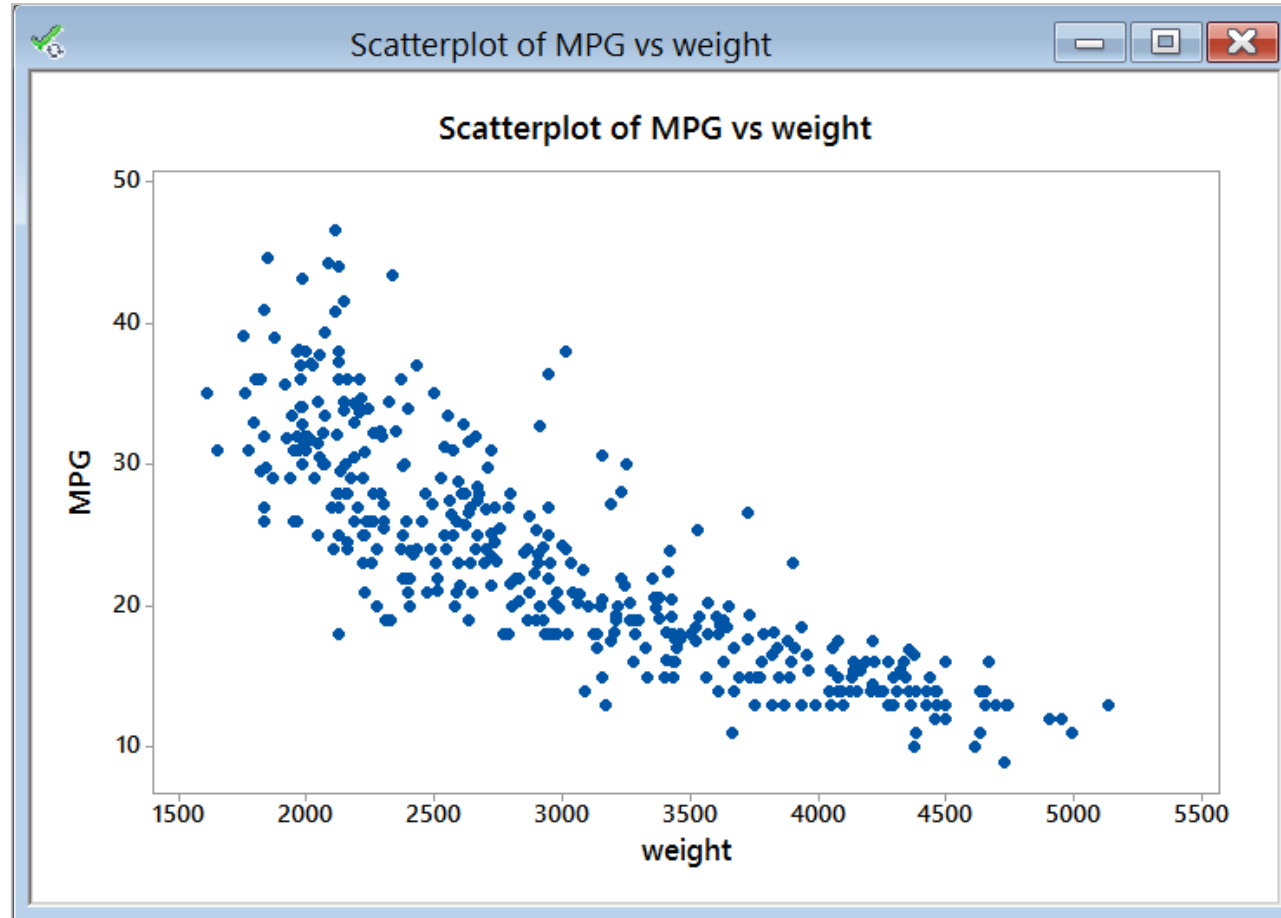

# Run Chart

---

- A **run chart** is a chart used to present the data in time order. It captures the process performance over time.
- The X axis of the run chart indicates the time and the Y axis indicates the observed values.
- Run chart looks similar to control charts except that a run chart does not have control limits plotted. It is easier to produce a run chart than a control chart.
- It is often used to identify the anomalies in the data and discover the pattern of data changing over time.



# How to Plot a Run Chart in Minitab

---

- Steps to plot a run chart in Minitab:
  - 1) Data File: “Run Chart” tab in “Sample Data.xlsx.”
  - 2) Click Stat → Quality Tools → Run Chart.
  - 3) A new window named “Run Chart” pops up.
  - 4) Select “Measurement” as the “Single Column.”
  - 5) Enter “1” as the “Subgroup Size.”
  - 6) Click “OK.”
  - 7) The run chart appears automatically in the new window.






# How to Plot a Run Chart in Minitab

The image illustrates the steps to create a Run Chart in Minitab. It shows the 'Stat' menu path: Stat > Quality Tools > Run Chart... This opens the 'Run Chart' dialog box. The 'Data are arranged as' section has 'Single column:' selected, with 'Measurement' entered in the text box. The 'Subgroup size:' is set to '1'. Under 'For data in subgroups', 'Plot subgroup means' is selected. The 'Options...' button is visible in the top right of the dialog box.




# How to Plot a Run Chart in Minitab

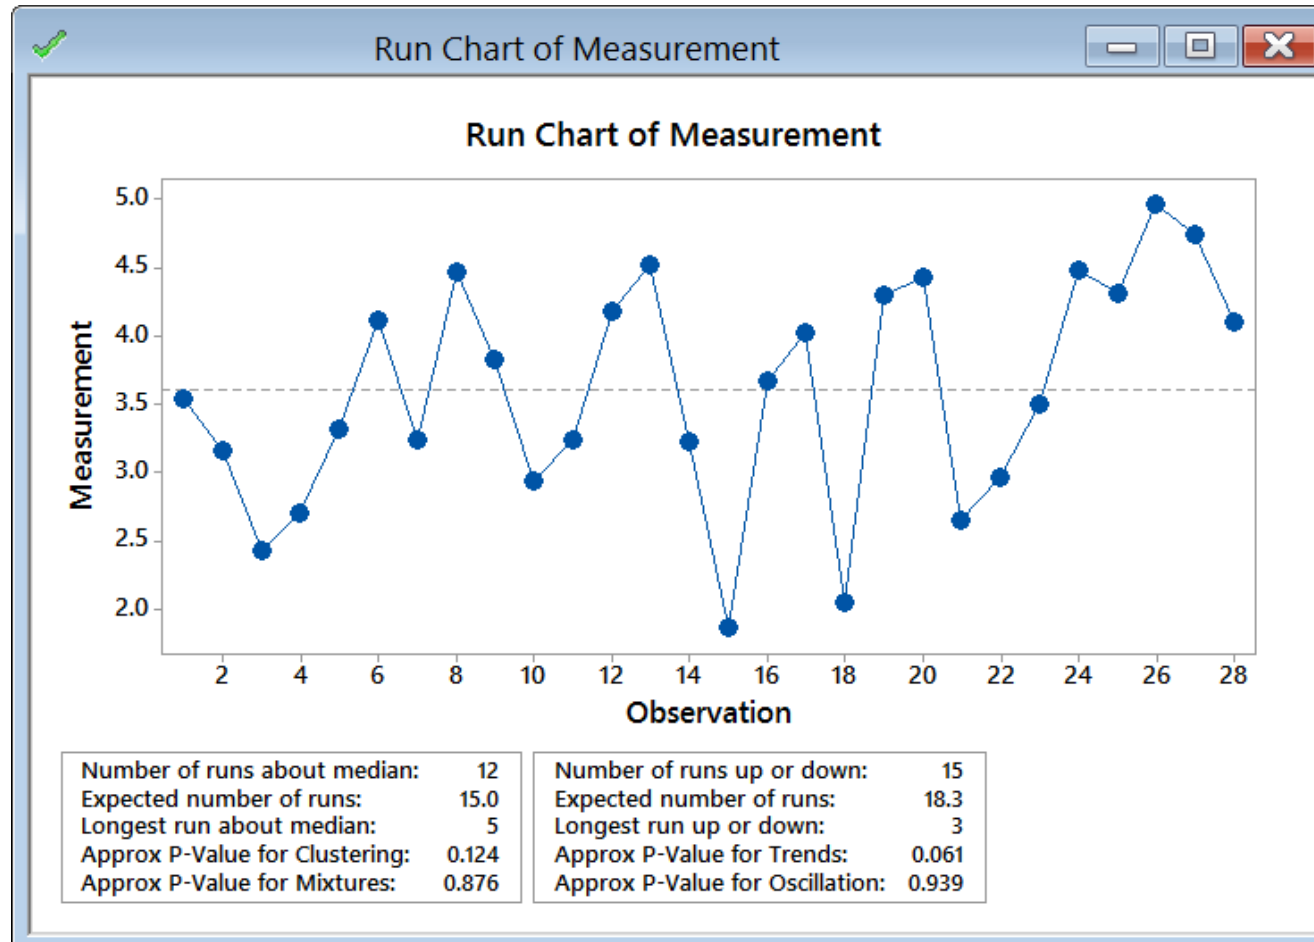

# Run Chart Example



- Run charts are used to identify the trend, cycle, seasonal pattern, or abnormality in the data.

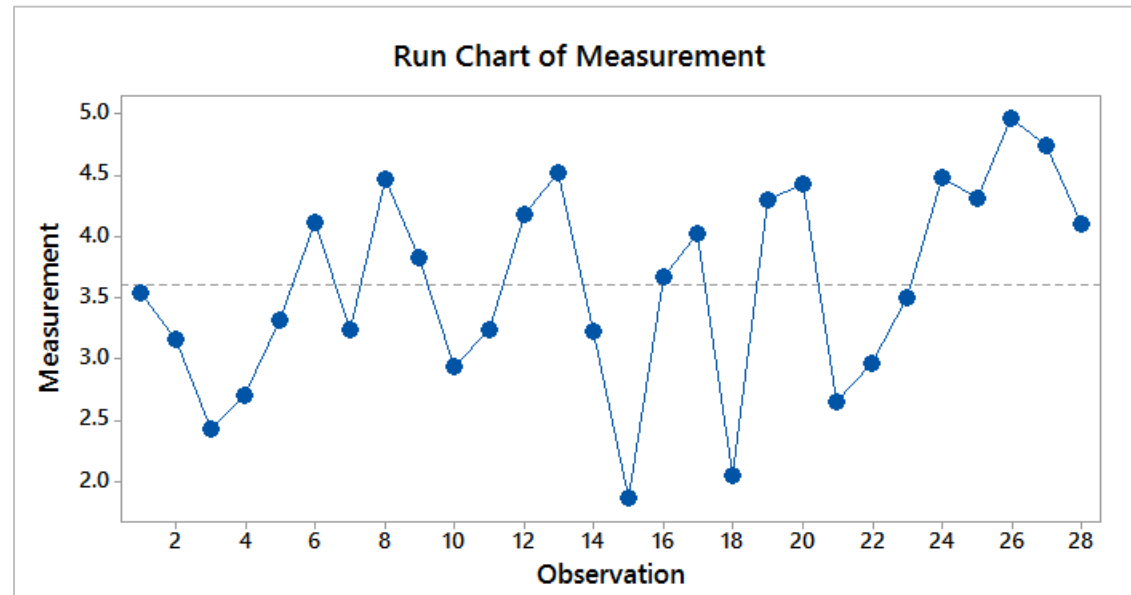

- The time series in this chart appears stable.
- There are no extreme outliers, trending or seasonal patterns.

# Run Chart Example



- Create another run chart using the data listed in column “Cycle” in the “Run Chart” tab of “Sample Data.xlsx.”

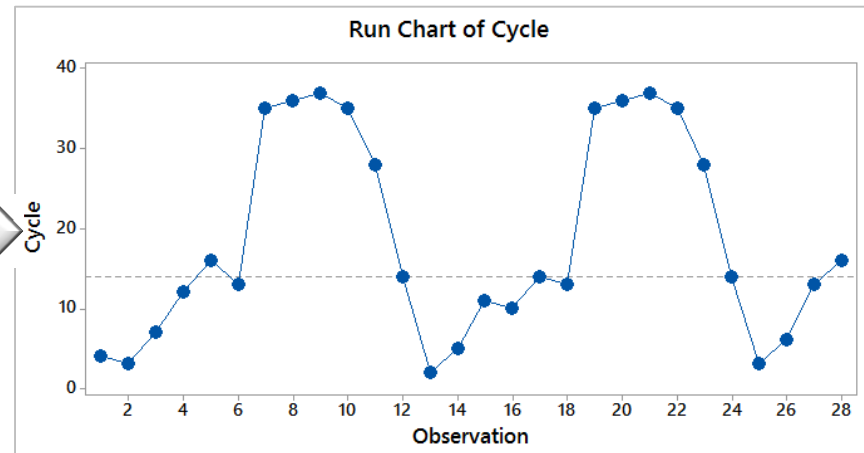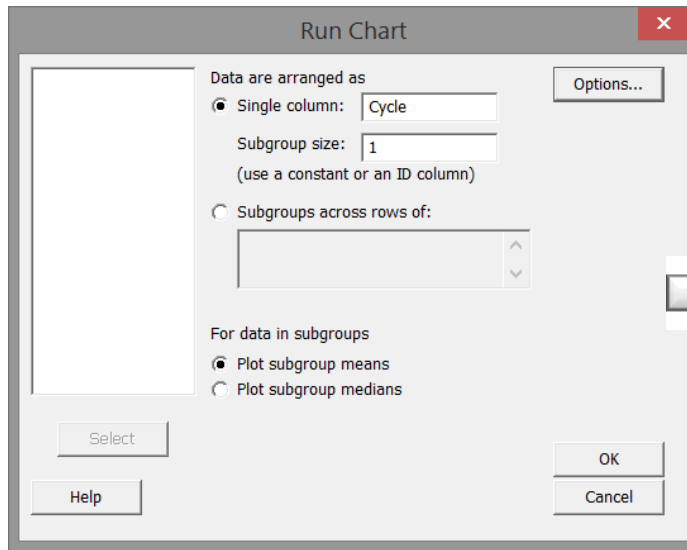

Seasonal Pattern

# Run Chart Example

- Create another run chart using the data listed in column “Trend” in the “Run Chart” tab of “Sample Data.xlsx.”

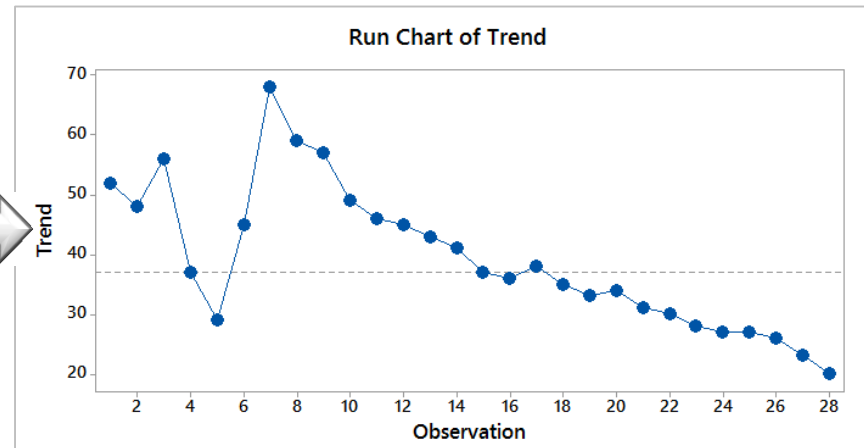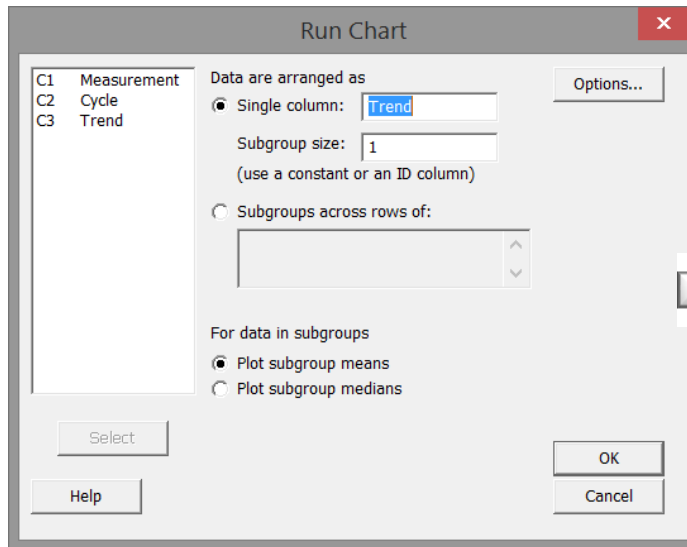

Trending Pattern

## 2.3 MSA (Measurement System Analysis)



# Yellow Belt Training: Measure Phase

---

## 2.1 Process Definition

- 2.1.1 Cause and Effect Diagrams
- 2.1.2 Cause and Effects Matrix
- 2.1.3 Process Mapping
- 2.1.4 FMEA: Failure Modes & Effects Analysis
- 2.1.5 Theory of Constraints

## 2.2 Six Sigma Statistics

- 2.2.1 Basic Statistics
- 2.2.2 Descriptive Statistics
- 2.2.3 Distributions and Normality
- 2.2.4 Graphical Analysis

## 2.3 Measurement System Analysis

- 2.3.1 Precision and Accuracy
- 2.3.2 Bias, Linearity, and Stability
- 2.3.3 Gage R&R
- 2.3.4 Variable and Attribute MSA

## 2.4 Process Capability

- 2.4.1 Capability Analysis
- 2.4.2 Concept of Stability
- 2.4.3 Attribute and Discrete Capability
- 2.4.4 Monitoring Techniques

## 2.3.1 Precision and Accuracy





# What is Measurement System Analysis

---

- **Measurement System Analysis (MSA)** is a systematic method to identify and analyze the variation components in the measurement.
- It is a mandatory step in any Six Sigma project to ensure the data are reliable before making any data-based decisions.
- The MSA is the check point of data quality before we start any further analysis and draw any conclusions from the data.



# Data-Based Analysis

---


- Here are some examples of data-based analysis where MSA is the prerequisite:
  - Correlation analysis
  - Regression analysis
  - Hypothesis testing
  - Analysis of variance
  - Design of experiments
  - Multivariate analysis
  - Statistical process control.



# Measurement System

---

- A measurement system is a process to obtain data.

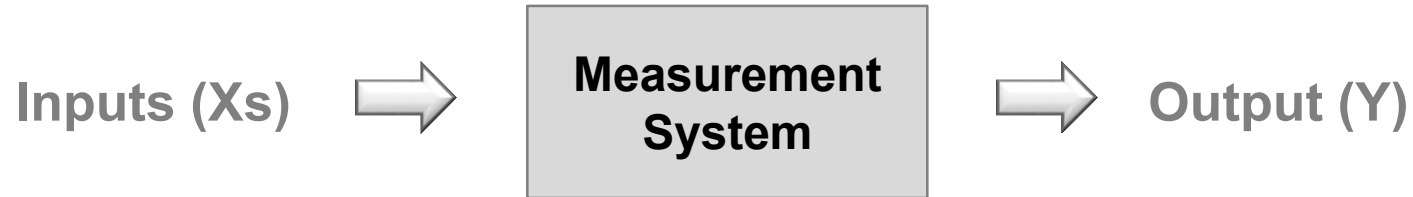

- Y (output of the measurement system)
  - Observed values
- X's (inputs of the measurement system)
  - True values
  - Measurement errors

# Measurement Errors

---

$$\text{Observed Value} = \text{True Value} + \text{Measurement Error}$$

- **True Value**
  - The actual value we are interested to measure
  - It reflects the true performance of the process we are measuring
- **Measurement Error**
  - The errors brought in by measurement system
- **Observed Value**
  - The observed/measured value obtained by the measurement system

# Measurement Errors

---

- Types of Observed Values:
  - Continuous measurements
    - Weight
    - Height
    - Money
  - Discrete measurements
    - Red/Yellow/Green
    - Yes/No
    - Ratings of 1–10
- A *variable MSA* is designed for continuous measurements and an *attribute MSA* is for discrete measurements.

# Measurement Errors

---

- Sources of measurement errors:
  - Human
  - Environment
  - Equipment
  - Sample
  - Process
  - Material
  - Method.
- Fishbone diagrams can help to brainstorm the potential factors affecting the measurement system.

# Measurement Errors

---

- The more errors the measurement system brings in, the less reliable the observed values are.
- A valid measurement system brings in minimum amount of measurement errors.
- The goal of MSA is to qualify the measurement system by quantitatively analyzing its characteristics.



# Characteristics of a Measurement System

---

- Any measurement systems can be characterized by two aspects:
  - Accuracy (location related)
  - Precision (variation related).
- A valid measurement system is *both* accurate and precise.
  - Being accurate does not guarantee the measurement system is precise.
  - Being precise does not guarantee the measurement system is accurate.





# Accuracy vs. Precision

---


- Accuracy:
  - The level of closeness between the average observed value and the true value
  - How well the observed value reflects the true value.
- Precision:
  - The spread of measurement values
  - How consistent the repeated measurements deliver the same values under the same circumstances.



# Accuracy vs. Precision

---


- Accurate and precise
  - high accuracy and high precision

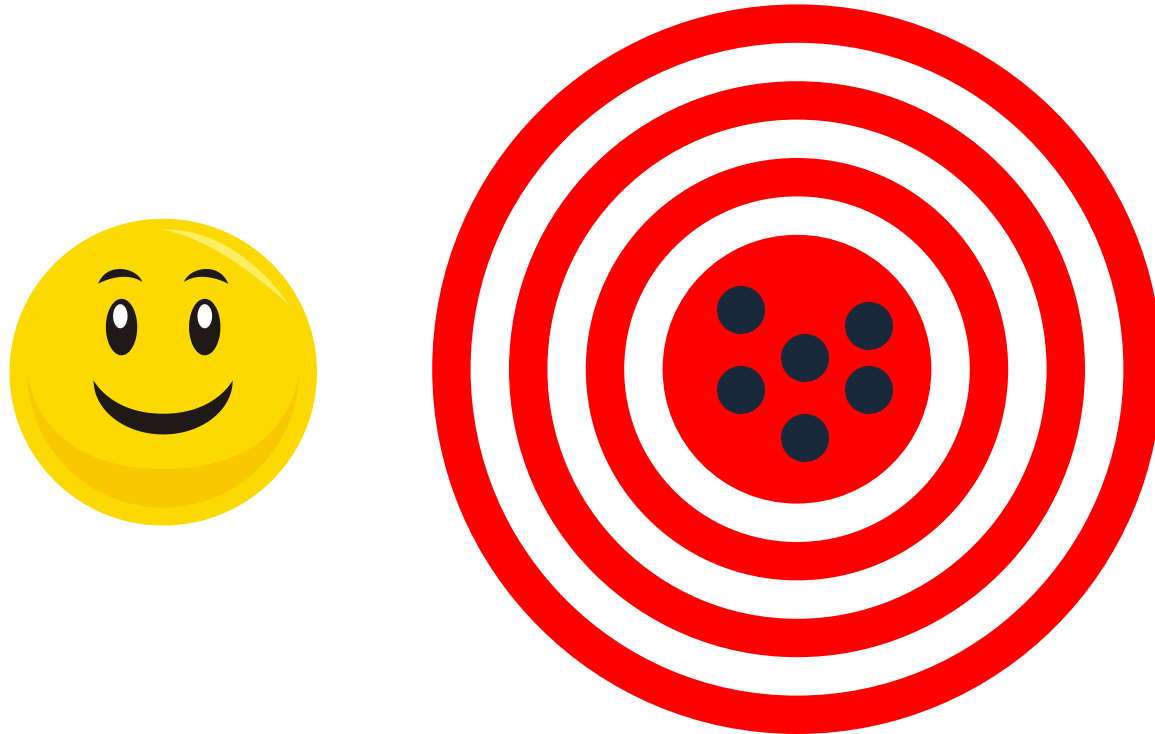

# Accuracy vs. Precision

---


- Accurate and not precise
  - high accuracy and low precision

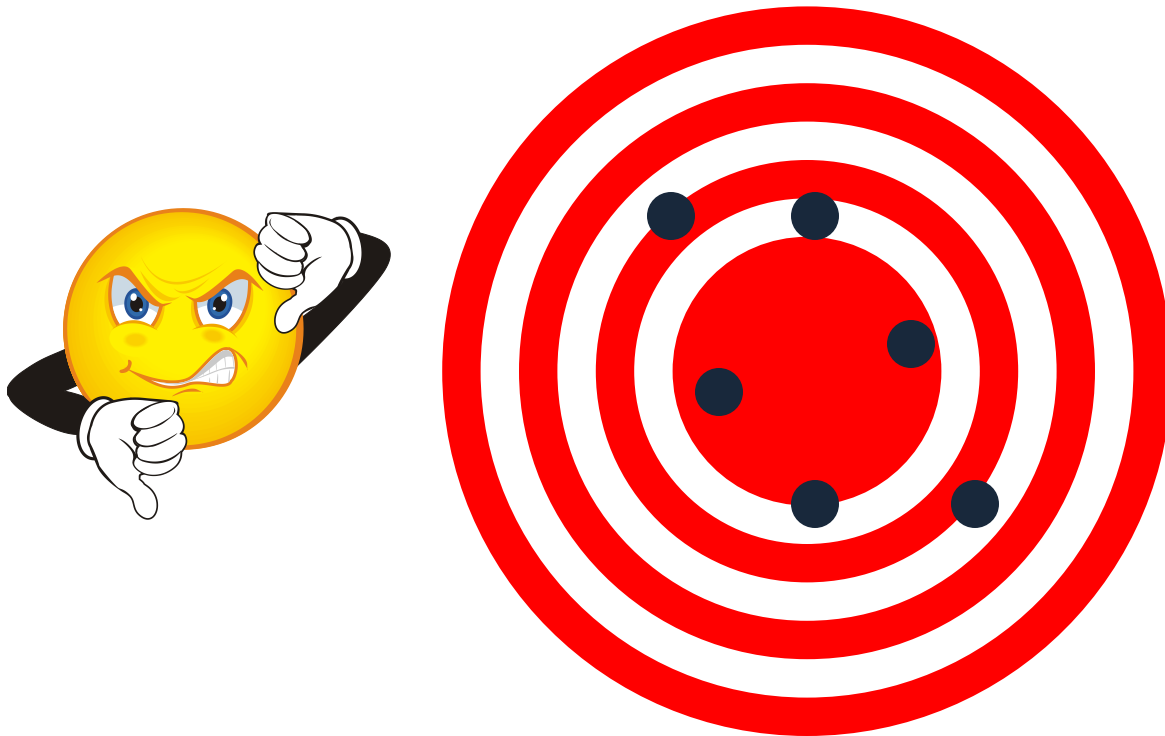

# Accuracy vs. Precision

---


- Precise and not accurate
  - high precision and low accuracy

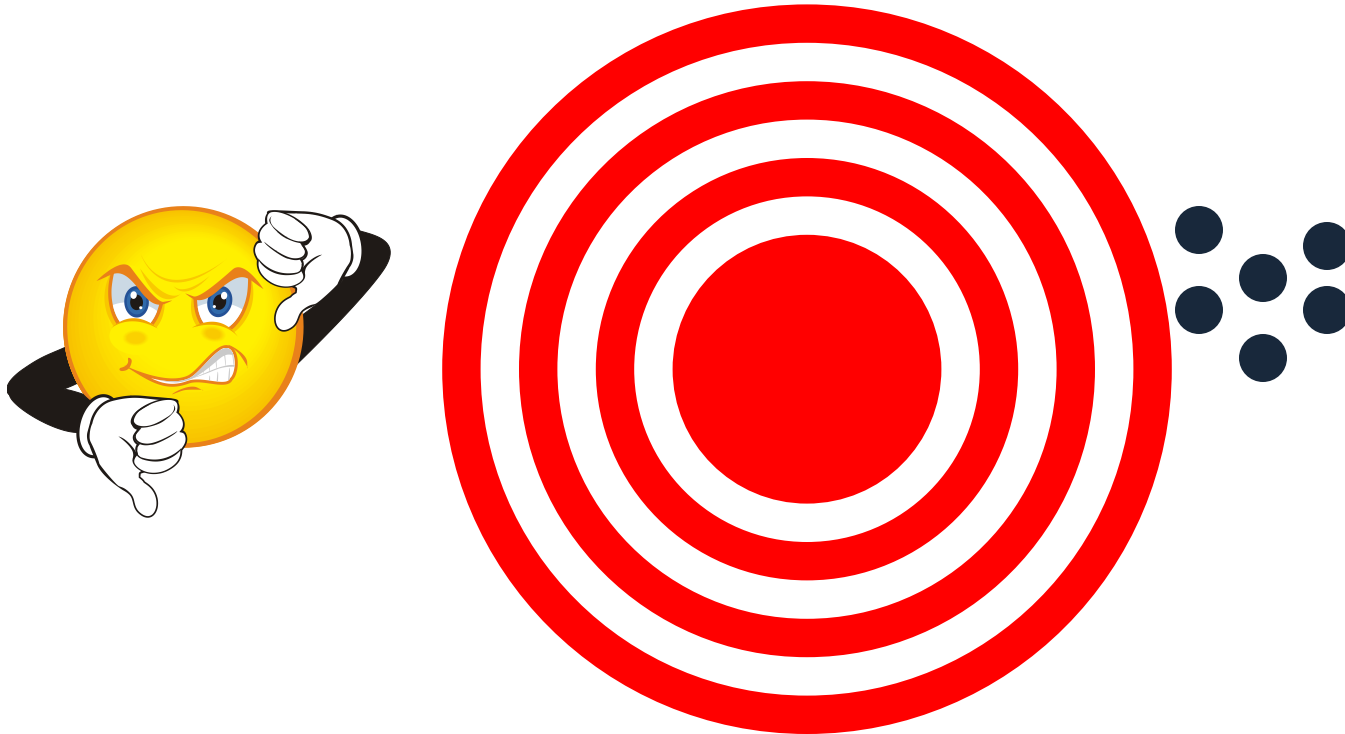

# Accuracy vs. Precision

---

- Not accurate and not precise
  - low accuracy and low precision

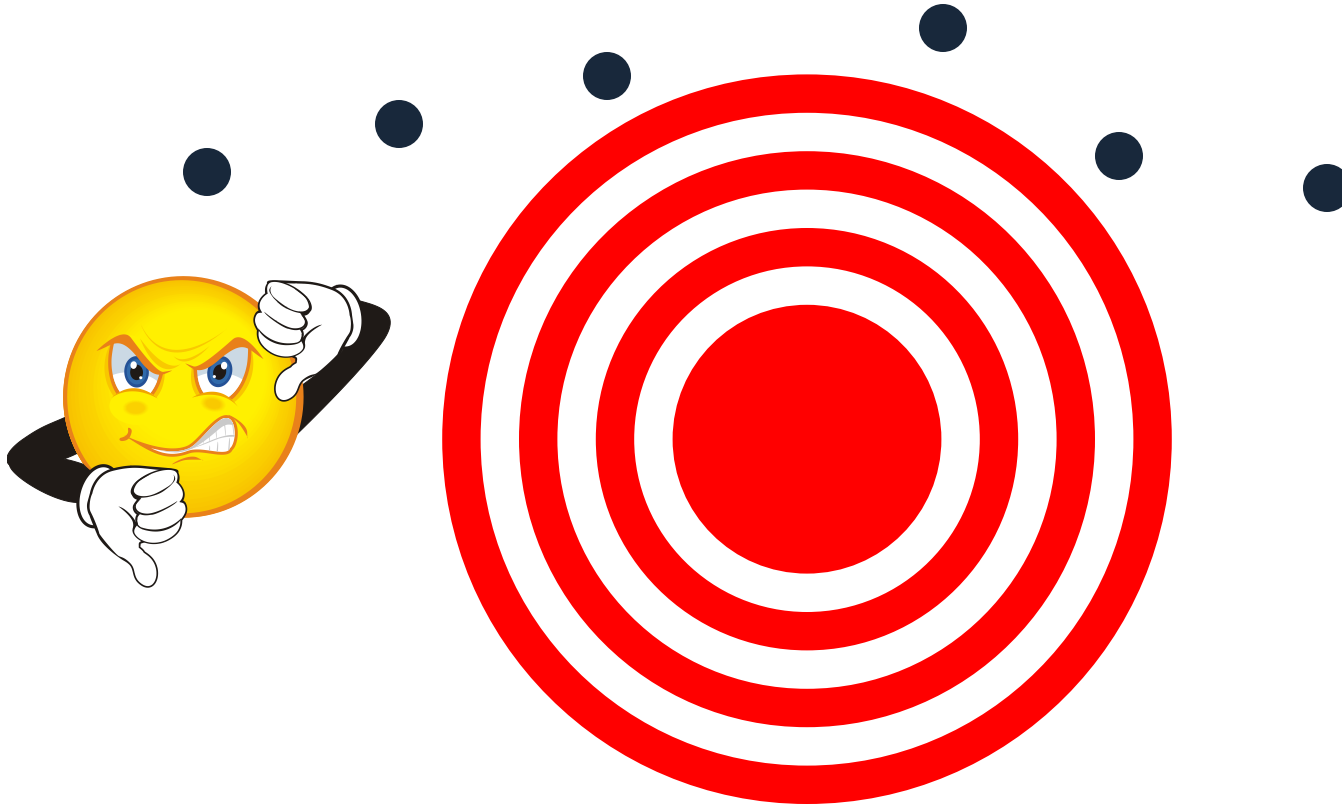

# MSA Conclusions

---

- If the measurement system is considered *both* accurate and precise, we can start the data-based analysis or decision making.
- If the measurement system is either not accurate or not precise, we need to identify the factor(s) affecting it and calibrate the measurement system until it is both accurate and precise.



# Stratification of Accuracy and Precision

---

- Accuracy
  - Bias
  - Linearity
  - Stability
- Precision
  - Repeatability
  - Reproducibility



## 2.3.2 Bias, Linearity and Stability





# Bias

---


- **Bias** is the difference between the observed value and the true value of a parameter or metric being measured.
- It is calculated by subtracting the reference value from the average value of the measurements.

$$\text{Bias} = \text{Grand Mean} - \text{Reference Value}$$

where the reference value is a standard agreed upon

# Bias

---

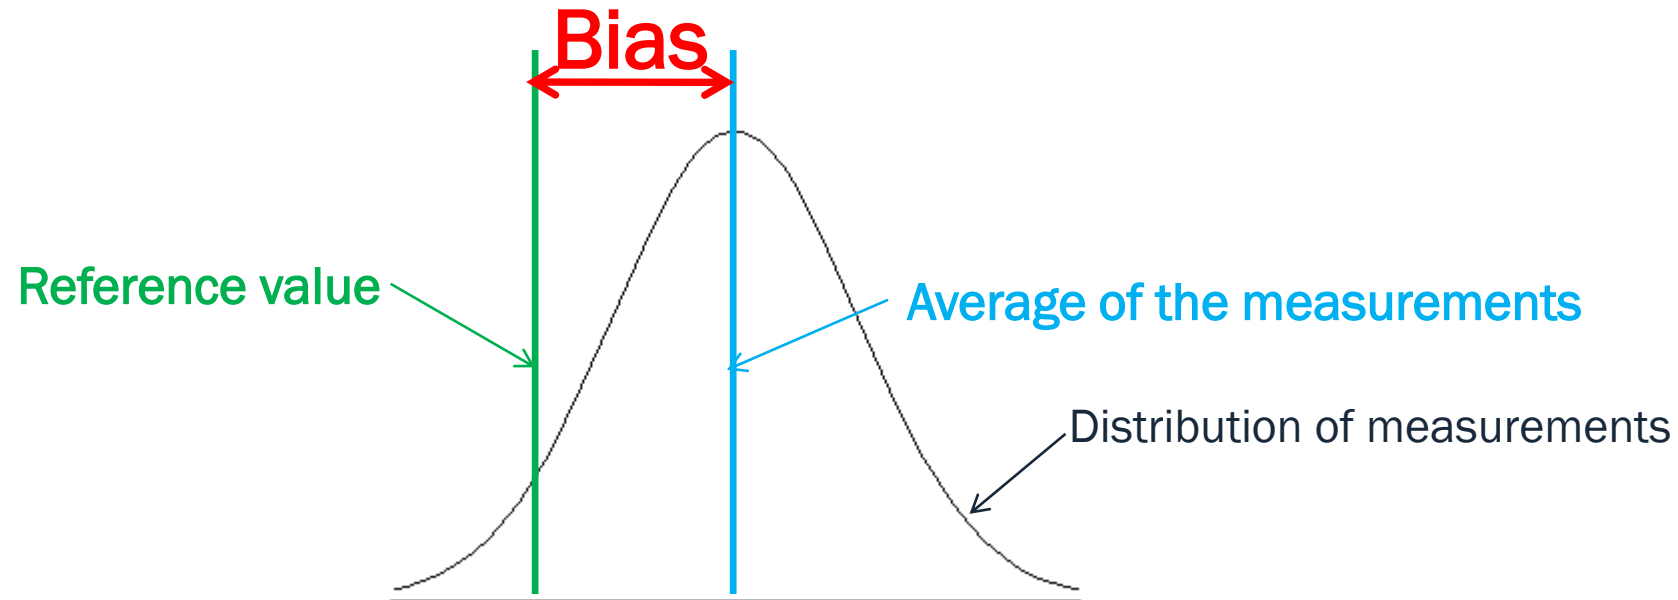

- The closer the average of all measurements is to the reference level, the smaller the bias.
- The reference level is the average of measurements of the same items using the master or standard instrument.

# Bias

---

- To determine whether the difference between the average of observed measurement and the reference value is statistically significant (we will explain more details about statistical significance in the Analyze module), we can either conduct a *hypothesis testing* or *compare* the reference value against the confidence intervals of the average measurements.
- If the reference value falls into the confidence intervals, the bias is not statistically significant and can be ignored. Otherwise, the bias is statistically significant and must be fixed.

# Bias

---

- Potential causes of bias:
  - Errors in measuring the reference value
  - Lack of proper training for appraisers
  - Damaged equipment or instrument
  - Measurement instrument not calibrated precisely
  - Appraisers read the data incorrectly.

# Linearity


---

- **Linearity** is the degree of the consistency of bias over the entire expected measurement range.
- It quantifies how the bias changes over the range of measurement.
- For example, a scale is off by 0.01 pounds when measuring an object of 10 pounds. However, it is off by 10 pounds when measuring an object of 100 pounds. The scale's bias is not linear.



# Linearity


---

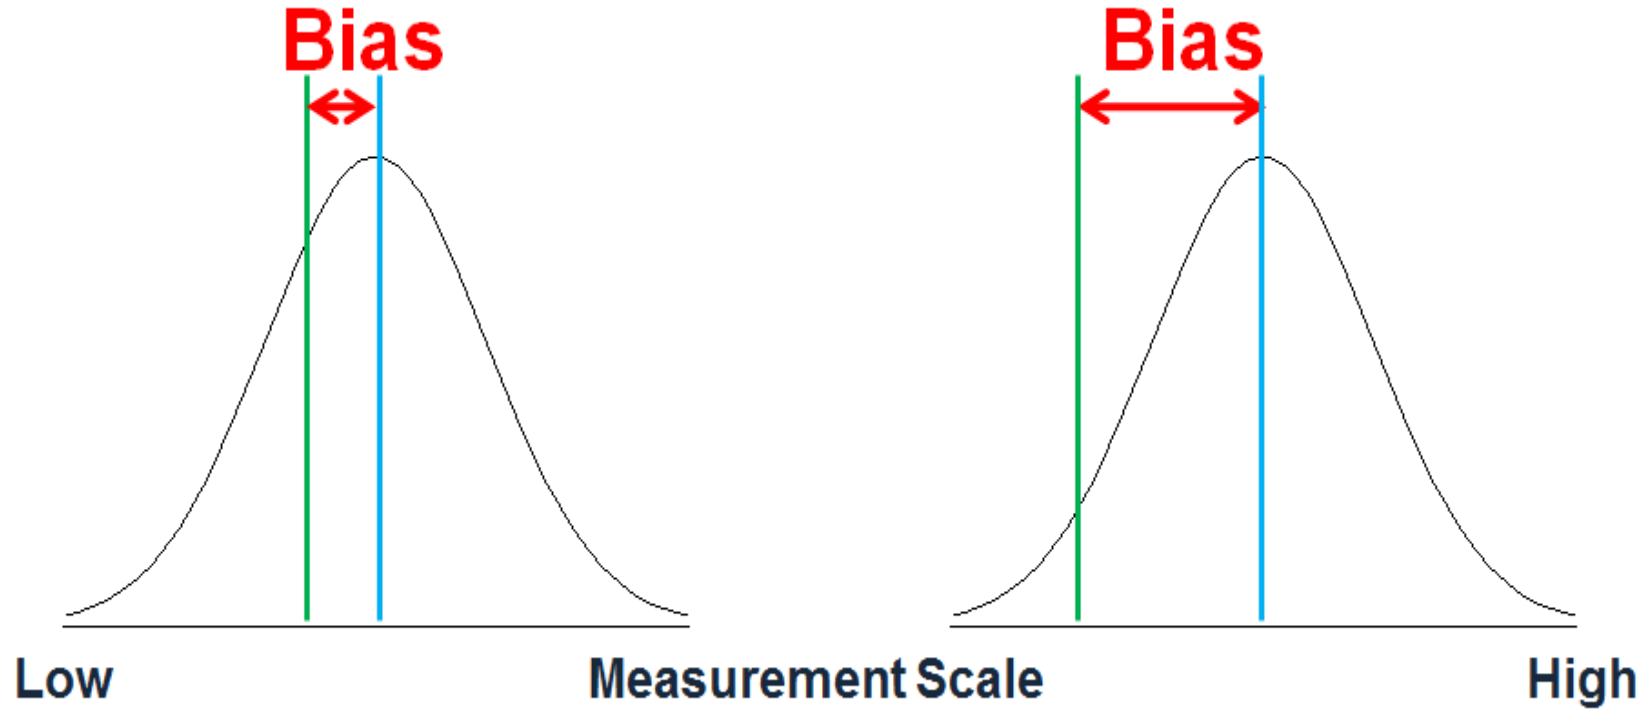

# Linearity

---

- Create a scatter plot for bias (Y-axis) and reference level (X-axis).
- Find a best fit linear regression line and compute the slope of the line.
- The closer the slope is to zero, the better the measurement system performs.

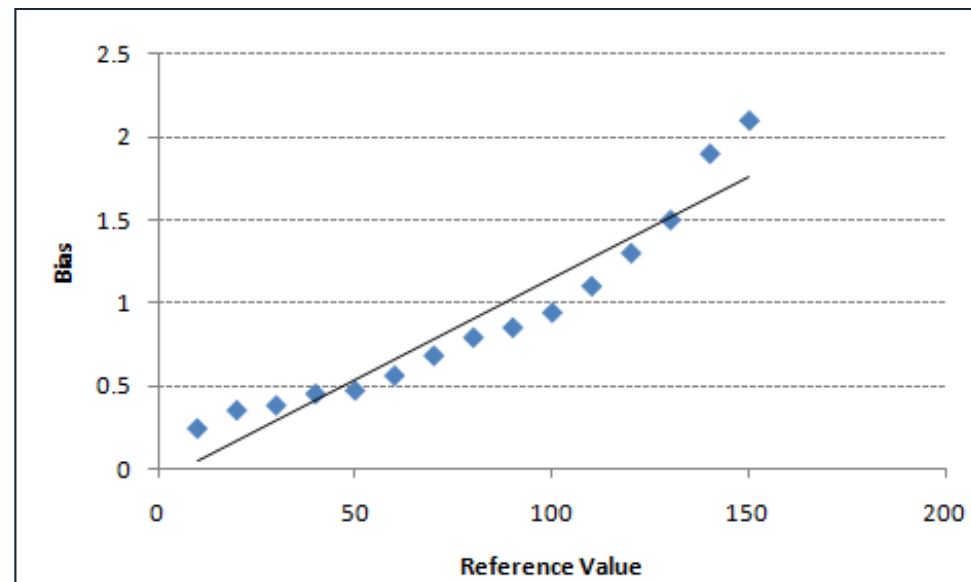

# Linearity

---

- Formula of the linearity of a measurement system:

$$\text{Linearity} = |\text{Slope}| \times \text{Process Variation}$$

where

$$\text{Slope} = \frac{\sum_{i=1}^n x_i y_i - \frac{1}{n} \sum_{i=1}^n x_i \sum_{i=1}^n y_i}{\sum_{i=1}^n (x_i^2) - \frac{1}{n} \left( \sum_{i=1}^n x_i \right)^2}$$

$x_i$  is the reference value;  
 $y_i$  is the bias at each reference level;  
 $n$  is the sample size.



# Linearity

---

- Potential causes of linearity:
  - Errors in measuring the lower end or higher end of the reference value
  - Lack of proper training for appraisers
  - Damaged equipment or instrument
  - Measurement instrument not calibrated correctly at the lower or higher end of the measurement scale
  - Innate nature of the instrument.




# Stability

---

- **Stability** is the consistency level needed to obtain the same values when measuring the same objects over an extended period of time.
- A measurement system that has low bias and linearity close to zero but cannot consistently perform well would not deliver reliable data.
- Stability is evaluated using control charts.




# Stability

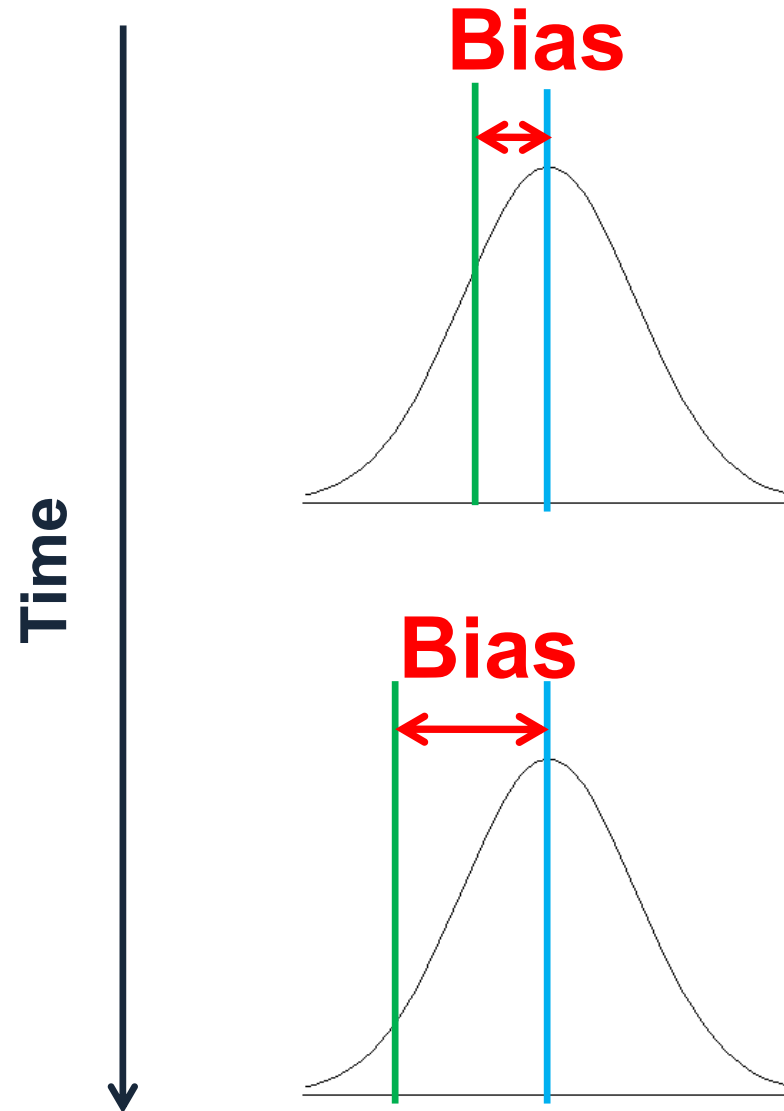

# Stability

- Control charts are used to evaluate the stability of a measurement system.
- When there are no data points out of control, the measurement system is considered stable.

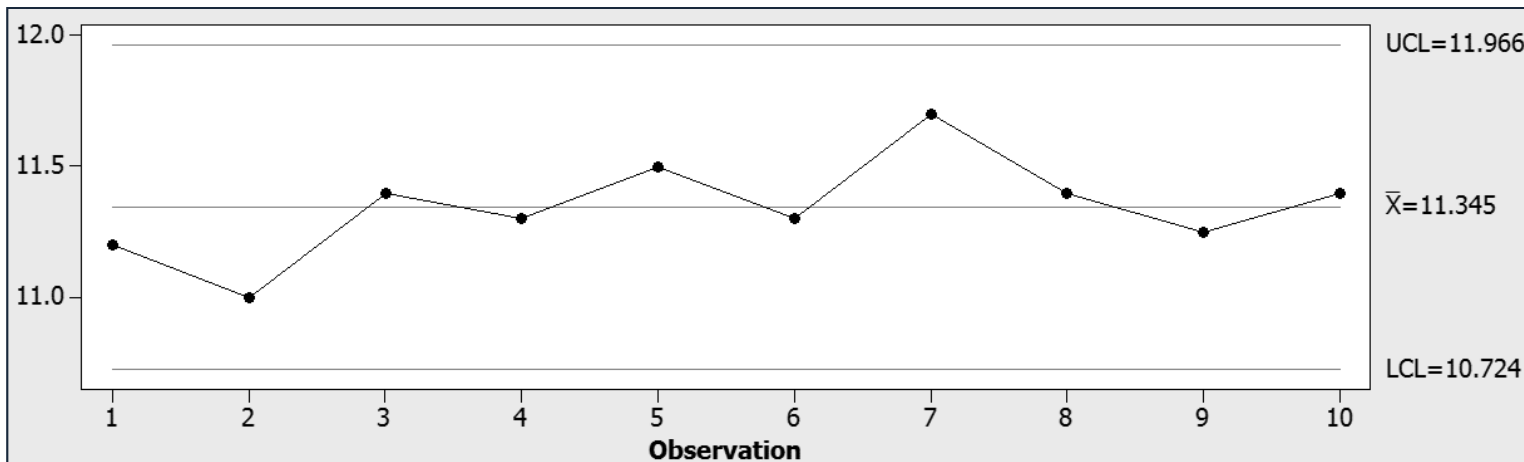

# Stability

---

- Potential causes of instability:
  - Inconsistent training for appraisers
  - Damaged equipment or instrument
  - Worn equipment or instrument
  - Measurement instrument not calibrated
  - Appraisers do not follow the procedure consistently.



## 2.3.3 Gage R&R



# Repeatability

---

- **Repeatability** evaluates whether the same appraiser can obtain the same value multiple times when measuring the same object using the same equipment under the same environment.
- It refers to the level of agreement between the repeated measurements of the same appraiser under the same condition.
- Repeatability measures the inherent variation of the measurement instrument.



# Reproducibility

---

- **Reproducibility** evaluates whether different appraisers can obtain the same value when measuring the same object independently.
- It refers to the level of agreement between different appraisers.
- It is not caused by the inherent variation of the measurement instrument. It reflects the variability caused by different appraisers, locations, gauges, environments etc.





# Gauge R&R

---

- Gauge R&R (i.e. Gauge Repeatability & Reproducibility) is a method to analyze the variability of a measurement system by partitioning the variation of the measurements using ANOVA (Analysis of Variance).
- Gauge R&R only addresses the precision of a measurement system.

# Gauge R&R

---

- Data collection of a gauge R&R study:
  - let  $k$  appraisers measure  $n$  random samples independently and repeat the process  $p$  times.
- Different appraisers perform the measurement independently.
- The order of measurement (e.g., sequence of samples and sequence of appraisers) is randomized.



# Gauge R&R

---

- The potential sources of variance in the measurement:
  - Appraisers:  $\sigma_{appraisers}^2$
  - Parts:  $\sigma_{parts}^2$
  - Appraisers × Parts:  $\sigma_{appraisers \times parts}^2$
  - Repeatability:  $\sigma_{repeatability}^2$
- Variance Components

$$\sigma_{total}^2 = \sigma_{appraisers}^2 + \sigma_{parts}^2 + \sigma_{appraisers \times parts}^2 + \sigma_{repeatability}^2$$

# Gauge R&R

- A valid measurement system has low variability in both repeatability and reproducibility so that the total variability observed can reflect the true variability in the objects (parts) being measured.

$$\sigma_{total}^2 = \sigma_{reproducibility}^2 + \sigma_{repeatability}^2 + \sigma_{parts}^2$$

where

$$\sigma_{reproducibility}^2 = \sigma_{appraisers}^2 + \sigma_{appraisers \times parts}^2$$

- Gauge R&R variance reflects the precision level of the measurement system.

$$\sigma_{R\&R}^2 = \sigma_{repeatability}^2 + \sigma_{reproducibility}^2$$

# Gauge R&R

---

- Variation Components

$$\textit{Variation}_{total} = Z_0 \times \sigma_{total}$$

$$\textit{Variation}_{repeatability} = Z_0 \times \sigma_{repeatability}$$

$$\textit{Variation}_{reproducibility} = Z_0 \times \sigma_{reproducibility}$$

$$\textit{Variation}_{parts} = Z_0 \times \sigma_{parts}$$

where

$$\sigma_{total}^2 = \sigma_{reproducibility}^2 + \sigma_{repeatability}^2 + \sigma_{parts}^2$$

$Z_0$  is a sigma multiplier that assumes a specific confidence level in the spread of the data.



# Gauge R&R

- The percentage of variation R&R contributes to the total variation in the measurement:

$$\text{Contribution}\%_{R\&R} = \frac{\text{Variation}_{R\&R}}{\text{Variation}_{total}} \times 100\%$$

$$\text{where } \text{Variation}_{R\&R} = Z_0 \times \sqrt{\sigma_{repeatability}^2 + \sigma_{reproducibility}^2}$$

Measurement System	% Study Var	% Contribution	Distinct Categories
Acceptable	10% or less	1% or Less	5 or Greater
Marginal	10% - 30%	1% - 9%	
Unacceptable	30% or Greater	9% or Greater	Less than 5



## 2.3.4 Variable and Attribute MSA



# Variable Gage R&R

---

- Whenever something is measured repeatedly or by different people or processes, the results of the measurements will vary. Variation comes from two primary sources:
  1. Differences between the parts being measured
  2. The measurement system.
- We can use a gage R&R to conduct a measurement system analysis to determine what portion of the variability comes from the parts and what portion comes from the measurement system.
- There are key study results that help us determine the components of variation within our measurement system.





# Key Measures of a Variable Gage R&R

---

- %Contribution: The percent of contribution for a source is 100 times the variance component for that source divided by the total variation.
- %Study Var ( $6*SD$ ): The percent of study variation for a source is 100 times the study variation for that source divided by the total variation.
- %Tolerance ( $SV/Tolerance$ ): The percent of spec range taken up by the total width of the distribution of the data based on variation from that source.
- Distinct Categories: The number of distinct categories of parts that the measurement system is able to distinguish. If a measurement system is not capable of distinguishing at least five types of parts, it is probably not adequate.



# Variable Gage R&R Guidelines (AIAG)

---

- **Percent Tolerance and Percent Study Variation**
  - 10% or less – Acceptable
  - 10% to 30% – Marginal
  - 30% or greater – Unacceptable
- **Percent Contribution**
  - 1% or less – Acceptable
  - 1% to 9% – Marginal
  - 9% or greater – Unacceptable
- **Distinct Categories**
  - Look for five or more distinct categories to indicate that your measurement system is acceptable.



# Guidelines for Distinct Categories

---

- Distinct categories is the number of categories of parts that your measurement system can distinguish. If it is below five, it is likely not able to distinguish between parts.

Number of Categories	Conclusion
Distinct Categories = 1	Measurement system cannot discriminate between parts
Distinct Categories = 2	Measurement system can only distinguish between high/low or big/small
Distinct Categories = 3 or 4	Measurement system is of little or no value
Distinct Categories = 5+	According to AIAG, the measurement system can acceptably discriminate parts







# Use Minitab to Implement a Variable MSA

---

- Data File: “Variable MSA” tab in “Sample Data.xlsx” (an example in the AIAG MSA Reference Manual, 3rd Edition)
- Step 1: Initiate the MSA study
  - 1) Click on Stat → Quality Tools → Gage Study → Create Gage R&R Study Worksheet.
  - 2) A new window named “Create Gage R&R Study Worksheet” pops up.
  - 3) Select 10 as the “Number of Parts.”
  - 4) Select 3 as the “Number of Operators.”
  - 5) Select 3 as the “Number of Replicates.”
  - 6) Enter the part name (e.g., Part 01, Part 02, Part 03, ...).
  - 7) Enter the operator name (e.g., Operator A, Operator B, Operator C).
  - 8) Click on the “Options” button and another window named “Create Gage R&R Study Worksheet – Options” pops up.
  - 9) Select the radio button “Do not randomize.”
  - 10) Click “OK” in the window “Create Gage R&R Study Worksheet – Options.”
  - 11) Click “OK” in the window “Create Gage R&R Study Worksheet.”
  - 12) A new data table is generated.




# Use Minitab to Implement a Variable MSA

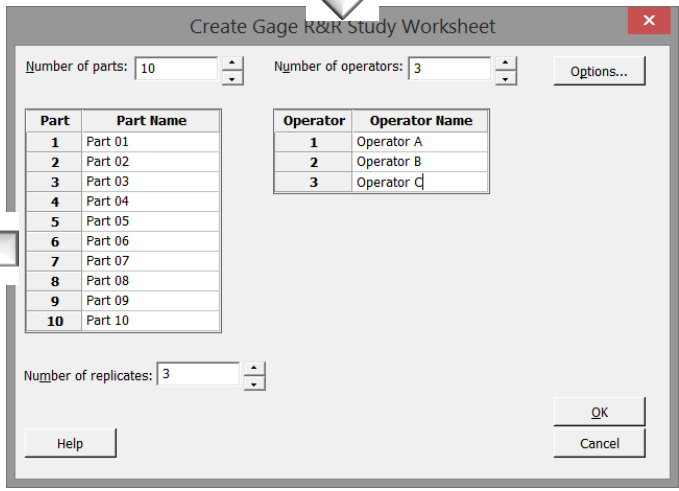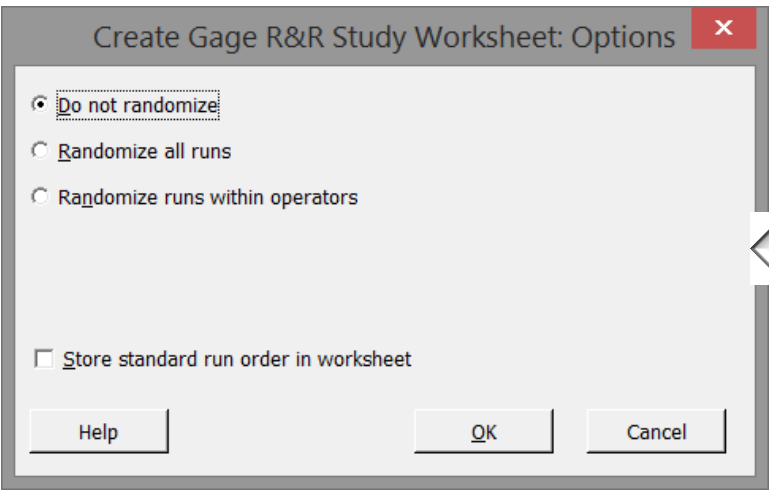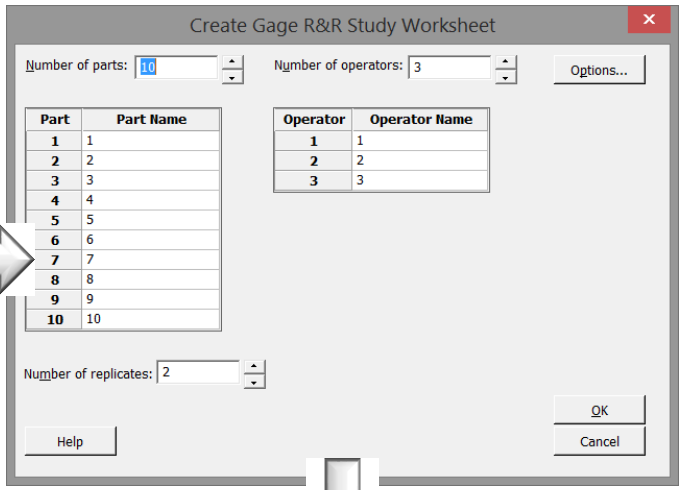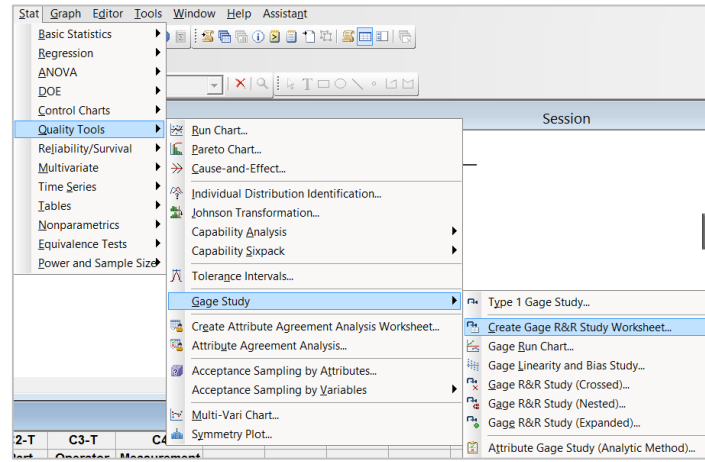

# Use Minitab to Implement a Variable MSA

- Step 2: Data collection
  - In the newly-generated data table, Minitab has provided the template where we organize the data.
  - In the “Variable MSA” tab in “Sample Data.xlsx,” there are all the measurement data collected by three operators (i.e., operator A, B, and C). The data are listed in the standardized order.

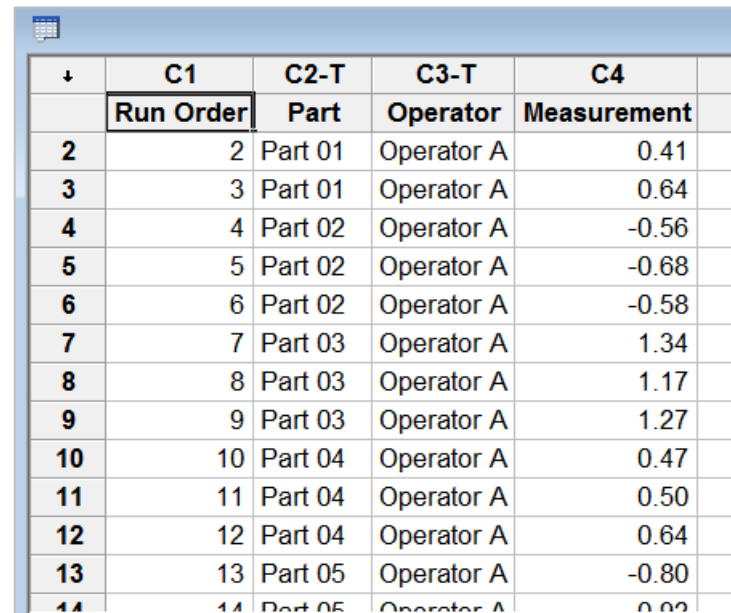

↓	C1	C2-T	C3-T	C4
	Run Order	Part	Operator	Measurement
2	2	Part 01	Operator A	0.41
3	3	Part 01	Operator A	0.64
4	4	Part 02	Operator A	-0.56
5	5	Part 02	Operator A	-0.68
6	6	Part 02	Operator A	-0.58
7	7	Part 03	Operator A	1.34
8	8	Part 03	Operator A	1.17
9	9	Part 03	Operator A	1.27
10	10	Part 04	Operator A	0.47
11	11	Part 04	Operator A	0.50
12	12	Part 04	Operator A	0.64
13	13	Part 05	Operator A	-0.80
14	14	Part 05	Operator A	0.02



# Use Minitab to Implement a Variable MSA

- Step 3: Enter the data into the MSA template generated in Minitab
  - Transfer the data from the “Measurement” column in “Variable MSA” tab of “Sample Data.xlsx” to the last column in the MSA template Minitab generates.
  - Although the run order in the “Variable MSA” tab of “Sample Data.xlsx” is different from the run order in the Minitab MSA template, we can directly use the raw data listed in the “Variable MSA” tab of “Sample Data.xlsx” for our MSA purpose.

+	C1	C2-T	C3-T	C4
	RunOrder	Parts	Operators	Measurement
1	1	Part 01	Operator A	0.29
2	2	Part 01	Operator B	0.41
3	3	Part 01	Operator C	0.64
4	4	Part 02	Operator A	-0.56
5	5	Part 02	Operator B	-0.68
6	6	Part 02	Operator C	-0.58
7	7	Part 03	Operator A	1.34
8	8	Part 03	Operator B	1.17
9	9	Part 03	Operator C	1.27
10	10	Part 04	Operator A	0.47



# Use Minitab to Implement a Variable MSA

---

- Step 4: Implement Gauge R&R
  - 1) Click Stat → Quality Tools → Gage Study → Gage R&R Study (Crossed).
  - 2) A new window named “Gage R&R Study (Crossed)” appears.
  - 3) Select “Part” as “Part numbers.”
  - 4) Select “Operator” as “Operators.”
  - 5) Select “Measurement” as “Measurement data.”
  - 6) Click on the “Options” button and another new window named “Gage R&R Study (Crossed) – ANOVA Options” pops up.
  - 7) Enter 5.15 as the “Study variation (number of standard deviations)”.
  - 8) Click “OK” in the window “Gage R&R Study (Crossed) – ANOVA Options.”
  - 9) Click “OK” in the window “Gage R&R Study (Crossed).”
  - 10) The MSA analysis results appear in the new window and the session window.





# Use Minitab to Implement a Variable MSA

The image illustrates the steps to set up a Gage R&R Study (Crossed) in Minitab:

- Minitab Main Menu:** The 'Stat' menu is open, and 'Quality Tools' is selected. The 'Gage Study' option is highlighted.
- Gage R&R Study (Crossed) Dialog:** The 'Gage R&R Study (Crossed)' dialog box is shown. The 'Part numbers' field is empty. The 'Operators' field is empty. The 'Measurement data' field is empty. The 'Method of Analysis' is set to 'ANOVA'.
- Gage R&R Study (Crossed) ANOVA Options Dialog:** The 'Gage R&R Study (Crossed): ANOVA Options' dialog box is shown. The 'Study variation' is set to 5.15. The 'Process tolerance' is set to 'Enter at least one specification limit'. The 'Alpha to remove interaction term' is set to 0.05.
- Gage R&R Study (Crossed) Dialog (Completed):** The 'Gage R&R Study (Crossed)' dialog box is shown with the 'Part numbers' field set to 'Parts', the 'Operators' field set to 'Operators', and the 'Measurement data' field set to 'Measurement'.



# Use Minitab to Implement a Variable MSA

- 5.15 is the recommended standard deviation multiplier by the Automotive Industry Action Group (AIAG). It corresponds to 99% of data in the normal distribution. If we use 6 as the standard deviation multiplier, it corresponds to 99.73% of the data in the normal distribution.

Confidence Level	Sigma Multiplier
90%	3.29
95%	3.92
99%	5.15
99.73%	6

# Use Minitab to Implement a Variable MSA

- Step 5: Analyze the MSA results

Gage R&R			
Source	VarComp	%Contribution (of VarComp)	
Total Gage R&R	0.09143	7.76	
Repeatability	0.03997	3.39	
Reproducibility	0.05146	4.37	
Operator	0.05146	4.37	
Part-To-Part	1.08645	92.24	
Total Variation	1.17788	100.00	


  

Source	StdDev (SD)	Study Var (5.15 × SD)	%Study Var (%SV)
Total Gage R&R	0.30237	1.55721	27.86
Repeatability	0.19993	1.02966	18.42
Reproducibility	0.22684	1.16821	20.90
Operator	0.22684	1.16821	20.90
Part-To-Part	1.04233	5.36799	96.04
Total Variation	1.08530	5.58929	100.00

The percentage of variation R&R contribution to the total variation is 27.86% and the precision level of this measurement system is not good. Actions are required to calibrate the measurement system.



# Use Minitab to Implement a Variable MSA

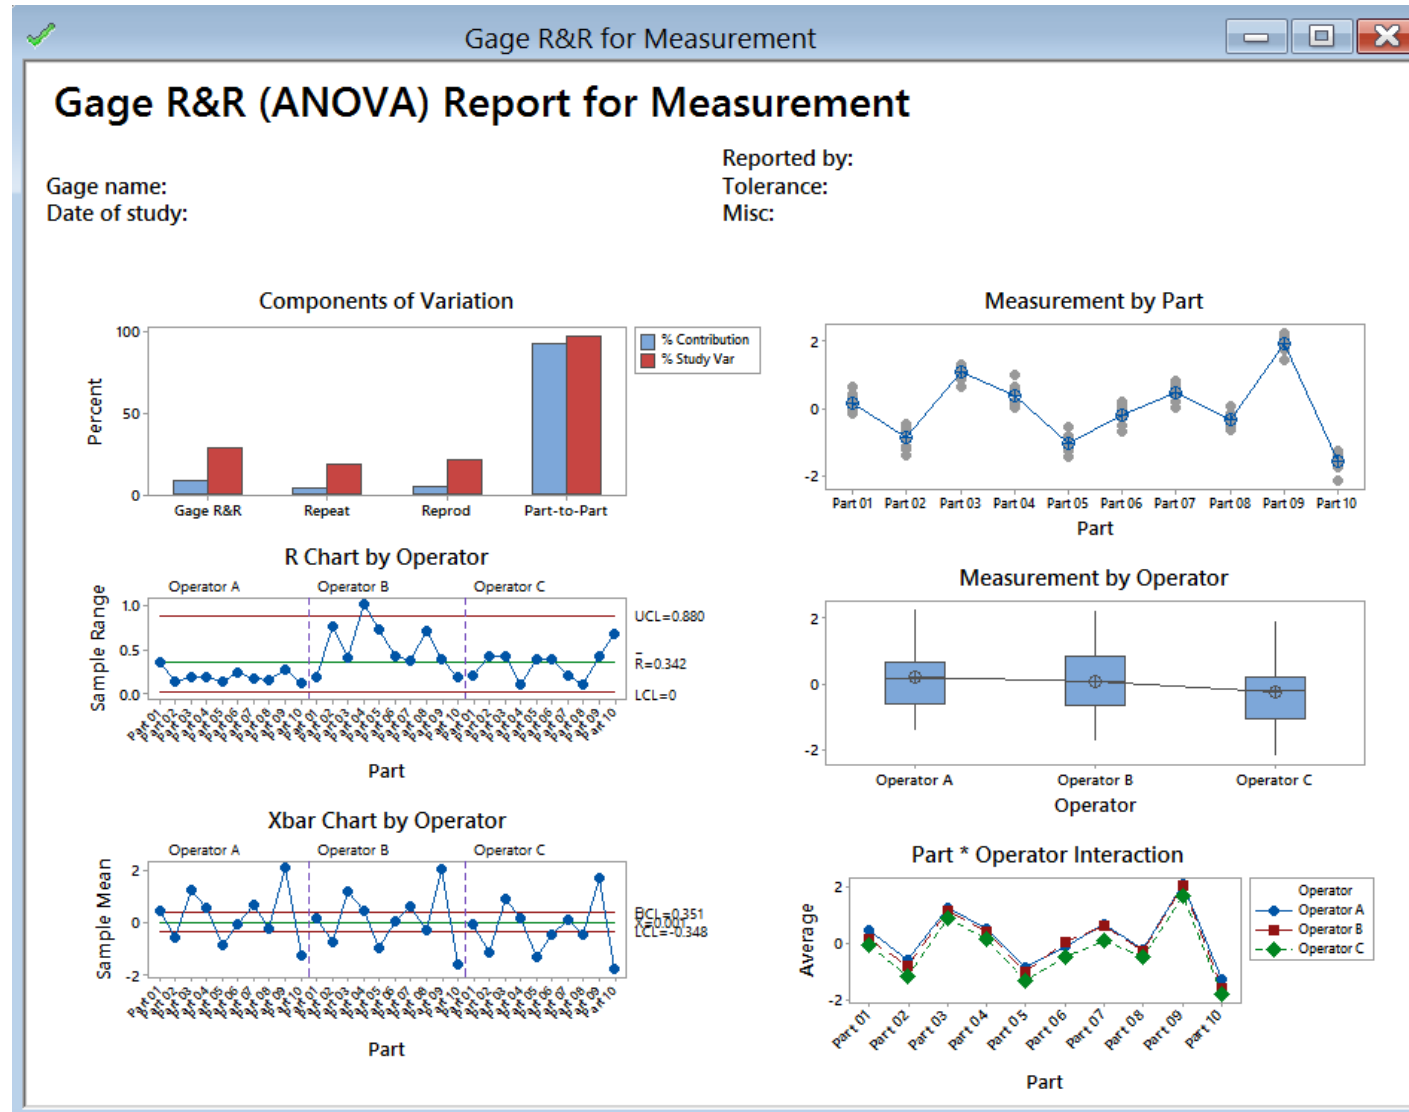

# Use Minitab to Implement an Attribute MSA

---

- Data File: “Attribute MSA” tab in “Sample Data.xlsx” (an example in the AIAG MSA Reference Manual, 3rd Edition).
- Steps in Minitab to run an attribute MSA



# Use Minitab to Implement an Attribute MSA

---

- Step 1: Reorganize the original data into four new columns (i.e., Appraiser, Assessed Result, Part, and Reference).
  - 1) Click Data → Stack → Blocks of Columns.
  - 2) A new window named “Stack Blocks of Columns” pops up.
  - 3) Select “Appraiser A,” “Part,” and “Reference” as block one.
  - 4) Select “Appraiser B,” “Part,” and “Reference” as block two.
  - 5) Select “Appraiser C,” “Part,” and “Reference” as block three.
  - 6) Select the radio button of “New worksheet” and name the sheet “Data.”
  - 7) Check the box “Use variable names in subscript column.”
  - 8) Click “OK.”
  - 9) The stacked columns are created in the new worksheet named “Data.”
  - 10) Name the four columns from left to right in worksheet “Data”: Appraiser, Assessed Result, Part, and Reference.



# Use Minitab to Implement an Attribute MSA

The image illustrates the steps to stack columns in Minitab for an Attribute MSA. It shows the 'Data' menu with 'Stack' selected, leading to the 'Stack Blocks of Columns' dialog box. The dialog box is shown in two states: first, with the 'Columns' list containing 'Part', 'Reference A', 'Appraiser A', 'Appraiser B', and 'Appraiser C'; second, with the 'Columns' list containing 'Appraiser A Part Reference', 'Appraiser B Part Reference', and 'Appraiser C Part Reference'. The 'Store stacked data in' section is set to 'New worksheet' with the name 'Data'.

**Data** Calc Stat Graph Editor Tools Window

- Subset Worksheet...
- Split Worksheet...
- Merge Worksheets...
- Copy
- Unstack Columns...
- Stack**
  - Columns...
  - Blocks of Columns...**
  - Rows...
- Transpose Columns...
- Sort...
- Rank...
- Delete Rows...
- Erase Variables...
- Code
- Change Data Type
- Date/Time
- Concatenate...
- Display Data...

**Stack Blocks of Columns**

Stack two or more blocks of columns on top of each other:

- C1 Part
- C2 Reference A
- C3 Appraiser A
- C4 Appraiser B
- C5 Appraiser C

Store stacked data in:

- New worksheet
- Name: (Optional)
- Columns of current worksheet:

Store subscripts in: (Optional)

Use variable names in subscript column

Help OK Cancel

**Stack Blocks of Columns**

Stack two or more blocks of columns on top of each other:

- 'Appraiser A' Part Reference
- 'Appraiser B' Part Reference
- 'Appraiser C' Part Reference

Store stacked data in:

- New worksheet
- Name: Data (Optional)
- Columns of current worksheet:

Store subscripts in: (Optional)


Use variable names in subscript column

Help OK Cancel



# Use Minitab to Implement an Attribute MSA

↓	C1-T	C2	C3	C4
	<b>Subscripts</b>			
1	Appraiser A	1	1	1
2	Appraiser A	1	1	1
3	Appraiser A	1	1	1
4	Appraiser A	1	2	1
5	Appraiser A	1	2	1
6	Appraiser A	1	2	1
7	Appraiser A	0	3	0
8	Appraiser A	0	3	0
9	Appraiser A	0	3	0
10	Appraiser A	0	4	0
11	Appraiser A	0	4	0
12	Appraiser A	0	4	0
13	Appraiser A	0	5	0



↓	C1-T	C2	C3	C4
	<b>Appraiser</b>	<b>Assessed Result</b>	<b>Part</b>	<b>Reference</b>
1	Appraiser A	1	1	1
2	Appraiser A	1	1	1
3	Appraiser A	1	1	1
4	Appraiser A	1	2	1
5	Appraiser A	1	2	1
6	Appraiser A	1	2	1
7	Appraiser A	0	3	0
8	Appraiser A	0	3	0
9	Appraiser A	0	3	0
10	Appraiser A	0	4	0
11	Appraiser A	0	4	0
12	Appraiser A	0	4	0
13	Appraiser A	0	5	0



# Use Minitab to Implement an Attribute MSA

---

- Step 2: Run MSA using Minitab
  - 1) Click Stat → Quality Tools → Attribute Agreement Analysis.
  - 2) A new window named “Attribute Agreement Analysis” pops up.
  - 3) Click in the blank box next to “Attribute column” and the variables appear in the list box on the left.
  - 4) Select “Assessed Result” as “Attribute column.”
  - 5) Select “Part” as “Sample.”
  - 6) Select “Appraiser” as “Appraisers.”
  - 7) Select “Reference” as “Known standard/attribute.”
  - 8) Click the “Options” button and another window named “Attribute Agreement Analysis – Options” pops up.
  - 9) Check the boxes of both “Calculate Cohen’s kappa if appropriate” and “Display disagreement table.”
  - 10) Click “OK” in the window “Attribute Agreement Analysis – Options.”
  - 11) Click “OK” in the window “Attribute Agreement Analysis.”
  - 12) The MSA results appear in the newly-generated window and the session window.



# Use Minitab to Implement an Attribute MSA

The process involves the following steps:

- Open the Minitab 'Stat' menu and select 'Attribute Agreement Analysis...'.
- In the 'Attribute Agreement Analysis' dialog box, select 'Attribute column'.
- In the 'Attribute Agreement Analysis' dialog box, select 'Assessed Results' for the attribute column, 'Parts' for samples, and 'Appraiser' for appraisers.
- In the 'Attribute Agreement Analysis: Options' dialog box, check 'Calculate Cohen's kappa if appropriate' and 'Display disagreement table', and set the confidence level to 95.0.



# Use Minitab to Implement an Attribute MSA

## Within Appraisers

### Assessment Agreement

Appraiser	# Inspected	# Matched	Percent	95% CI
Appraiser A	50	42	84.00	(70.89, 92.83)
Appraiser B	50	45	90.00	(78.19, 96.67)
Appraiser C	50	40	80.00	(66.28, 89.97)

# Matched: Appraiser agrees with him/herself across trials.

### Fleiss' Kappa Statistics

Appraiser	Response	Kappa	SE Kappa	Z	P(vs > 0)
Appraiser A	0	0.760000	0.0816497	9.3081	0.0000
	1	0.760000	0.0816497	9.3081	0.0000
Appraiser B	0	0.845073	0.0816497	10.3500	0.0000
	1	0.845073	0.0816497	10.3500	0.0000
Appraiser C	0	0.702911	0.0816497	8.6089	0.0000
	1	0.702911	0.0816497	8.6089	0.0000

Within Appraiser Agreement Percent: the agreement percentage within each individual appraiser.

# Use Minitab to Implement an Attribute MSA

**Each Appraiser vs Standard**

Assessment Agreement

Appraiser	# Inspected	# Matched	Percent	95% CI
Appraiser A	50	42	84.00	(70.89, 92.83)
Appraiser B	50	45	90.00	(78.19, 96.67)
Appraiser C	50	40	80.00	(66.28, 89.97)

# Matched: Appraiser's assessment across trials agrees with the k

Assessment Disagreement

Appraiser	# 1 / 0	Percent	# 0 / 1	Percent	# Mixed	Percent
Appraiser A	0	0.00	0	0.00	8	16.00
Appraiser B	0	0.00	0	0.00	5	10.00
Appraiser C	0	0.00	0	0.00	10	20.00

# 1 / 0: Assessments across trials = 1 / standard = 0.  
 # 0 / 1: Assessments across trials = 0 / standard = 1.  
 # Mixed: Assessments across trials are not identical.

Fleiss' Kappa Statistics

Appraiser	Response	Kappa	SE Kappa	Z	P(vs > 0)
Appraiser A	0	0.880236	0.0816497	10.7806	0.0000
	1	0.880236	0.0816497	10.7806	0.0000
Appraiser B	0	0.922612	0.0816497	11.2996	0.0000
	1	0.922612	0.0816497	11.2996	0.0000
Appraiser C	0	0.774703	0.0816497	9.4881	0.0000
	1	0.774703	0.0816497	9.4881	0.0000

Each Appraiser vs. Standard Agreement Percent: the agreement percentage between each appraiser and the standard. It reflects the accuracy of the measurement system.



# Use Minitab to Implement an Attribute MSA

**Between Appraisers**

Assessment Agreement

# Inspected	# Matched	Percent	95% CI
50	39	78.00	(64.04, 88.47)

# Matched: All appraisers' assessments agree with each other.

Fleiss' Kappa Statistics

Response	Kappa	SE Kappa	Z	P(vs > 0)
0	0.793606	0.0235702	33.6698	0.0000
1	0.793606	0.0235702	33.6698	0.0000

Between Appraiser Agreement Percent: the agreement percentage between different appraisers.

All Appraisers vs. Standard Agreement Percent: overall agreement percentage of both within and between appraisers. It reflects how precise the measurement system performs.

**All Appraisers vs Standard**

Assessment Agreement

# Inspected	# Matched	Percent	95% CI
50	39	78.00	(64.04, 88.47)

# Matched: All appraisers' assessments agree with the known standard.

Fleiss' Kappa Statistics

Response	Kappa	SE Kappa	Z	P(vs > 0)
0	0.859184	0.0471405	18.2260	0.0000
1	0.859184	0.0471405	18.2260	0.0000



# Use Minitab to Implement an Attribute MSA

---

- **Kappa statistic** is a coefficient indicating the agreement percentage above the expected agreement by chance.
- Kappa ranges from -1 (perfect disagreement) to 1 (perfect agreement).
- When the observed agreement is less than the chance agreement, Kappa is negative.
- When the observed agreement is greater than the chance agreement, Kappa is positive.
- Rule of thumb: If Kappa is greater than 0.7, the measurement system is acceptable. If Kappa is greater than 0.9, the measurement system is excellent.



# Use Minitab to Implement an Attribute MSA

**Within Appraisers**

Assessment Agreement

Appraiser	# Inspected	# Matched	Percent	95% CI
Appraiser A	50	42	84.00	(70.89, 92.83)
Appraiser B	50	45	90.00	(78.19, 96.67)
Appraiser C	50	40	80.00	(66.28, 89.97)

# Matched: Appraiser agrees with him/herself across trials.

Fleiss' Kappa Statistics

Appraiser	Response	Kappa	SE Kappa	Z	P(vs > 0)
Appraiser A	0	0.760000	0.0816497	9.3081	0.0000
	1	0.760000	0.0816497	9.3081	0.0000
Appraiser B	0	0.845073	0.0816497	10.3500	0.0000
	1	0.845073	0.0816497	10.3500	0.0000
Appraiser C	0	0.702911	0.0816497	8.6089	0.0000
	1	0.702911	0.0816497	8.6089	0.0000

Kappa statistic of the agreement within each appraiser

Kappa statistic of the agreement between individual appraiser and the standard

**Each Appraiser vs Standard**

Assessment Agreement

Appraiser	# Inspected	# Matched	Percent	95% CI
Appraiser A	50	42	84.00	(70.89, 92.83)
Appraiser B	50	45	90.00	(78.19, 96.67)
Appraiser C	50	40	80.00	(66.28, 89.97)

# Matched: Appraiser's assessment across trials agrees with the known standard.

Assessment Disagreement

Appraiser	# 1 / 0	Percent	# 0 / 1	Percent	# Mixed	Percent
Appraiser A	0	0.00	0	0.00	8	16.00
Appraiser B	0	0.00	0	0.00	5	10.00
Appraiser C	0	0.00	0	0.00	10	20.00

# 1 / 0: Assessments across trials = 1 / standard = 0.  
 # 0 / 1: Assessments across trials = 0 / standard = 1.  
 # Mixed: Assessments across trials are not identical.

Fleiss' Kappa Statistics

Appraiser	Response	Kappa	SE Kappa	Z	P(vs > 0)
Appraiser A	0	0.880236	0.0816497	10.7806	0.0000
	1	0.880236	0.0816497	10.7806	0.0000
Appraiser B	0	0.922612	0.0816497	11.2996	0.0000
	1	0.922612	0.0816497	11.2996	0.0000
Appraiser C	0	0.774703	0.0816497	9.4881	0.0000
	1	0.774703	0.0816497	9.4881	0.0000



# Use Minitab to Implement an Attribute MSA

**Between Appraisers**

Assessment Agreement

# Inspected	# Matched	Percent	95% CI
50	39	78.00	(64.04, 88.47)

# Matched: All appraisers' assessments agree with each other.

Fleiss' Kappa Statistics

Response	Kappa	SE Kappa	Z	P(vs > 0)
0	0.793606	0.0235702	33.6698	0.0000
1	0.793606	0.0235702	33.6698	0.0000

Kappa statistic of the agreement between appraisers

Kappa statistic of the overall agreement between appraisers and the standard

**All Appraisers vs Standard**

Assessment Agreement

# Inspected	# Matched	Percent	95% CI
50	39	78.00	(64.04, 88.47)

# Matched: All appraisers' assessments agree with the known standard.

Fleiss' Kappa Statistics

Response	Kappa	SE Kappa	Z	P(vs > 0)
0	0.859184	0.0471405	18.2260	0.0000
1	0.859184	0.0471405	18.2260	0.0000





## 2.4 Process Capability



# Yellow Belt Training: Measure Phase

---

## 2.1 Process Definition

- 2.1.1 Cause and Effect Diagrams
- 2.1.2 Cause and Effects Matrix
- 2.1.3 Process Mapping
- 2.1.4 FMEA: Failure Modes & Effects Analysis
- 2.1.5 Theory of Constraints

## 2.2 Six Sigma Statistics

- 2.2.1 Basic Statistics
- 2.2.2 Descriptive Statistics
- 2.2.3 Distributions and Normality
- 2.2.4 Graphical Analysis

## 2.3 Measurement System Analysis

- 2.3.1 Precision and Accuracy
- 2.3.2 Bias, Linearity, and Stability
- 2.3.3 Gage R&R
- 2.3.4 Variable and Attribute MSA

## 2.4 Process Capability

- 2.4.1 Capability Analysis
- 2.4.2 Concept of Stability
- 2.4.3 Attribute and Discrete Capability
- 2.4.4 Monitoring Techniques

## 2.4.1 Capability Analysis



# What is Process Capability?

---

- The **process capability** measures how well the process performs to meet given specified outcome.
- It indicates the conformance of a process to meet given requirements or specifications.
- **Capability analysis** helps to better understand the performance of the process with respect to meeting customer's specifications and identify the process improvement opportunities.



# Process Capability Analysis Steps

---

- Step 1: Determine the metric or parameter to measure and analyze.
- Step 2: Collect the historical data for the parameter of interest.
- Step 3: Prove the process is statistically stable (i.e., in control).
- Step 4: Calculate the process capability indices.
- Step 5: Monitor the process and ensure it remains in control over time. Update the process capability indices if needed.

# Process Capability Indices

---

- Process capability can be presented using various indices depending on the nature of the process and the goal of the analysis.
- Popular process capability indices:
  - $C_p$
  - $P_p$
  - $C_{pk}$
  - $P_{pk}$
  - $C_{pm}$

# $C_p$

- $C_p$  stands for **capability of the process**.

$$C_p = \frac{USL - LSL}{6 \times \sigma_{within}}$$

where

$$\sigma_{within} = \frac{s_p}{c_4(d+1)}$$

$$s_p = \sqrt{\frac{\sum_i \sum_j (x_{ij} - \bar{x}_i)^2}{\sum_i (n_i - 1)}}$$

$$d = \sum_i (n_i - 1)$$

$$c_4 = \frac{4(n-1)}{(4n-3)}$$

**USL** and **LSL** are the upper and lower specification limits.  
 $n$  is the sample size.



# $C_p$

---

- $C_p$  measures the process' potential capability to meet the two-sided specifications.
- It does not take the process average into consideration.
- High  $C_p$  indicates the small spread of the process with respect to the spread of the customer specifications.
- $C_p$  is recommended when the process is centered between the specification limits.
- $C_p$  works when there are both upper and lower specification limits.





# $P_p$

---

- $P_p$  stands for **performance of the process**.

$$P_p = \frac{USL - LSL}{6 \times \sigma_{overall}}$$

where

$$\sigma_{overall} = \frac{s}{c_4(n)}$$

$$s = \sqrt{\sum_i \sum_j \frac{(x_{ij} - \bar{x})^2}{n-1}}$$

$$c_4 = \frac{4(n-1)}{(4n-3)}$$

**USL** and **LSL** are the upper and lower specification limits.  
 $n$  is the sample size.



# $P_p$

---

- Similar to  $C_p$ ,  $P_p$  measures the capability of the process to meet the two-sided specifications.
- It only focuses on the spread and does not take the process centralization into consideration.
- It is recommended when the process is centered between the specification limits.
- $C_p$  considers the within-subgroup standard deviation and  $P_p$  considers the total standard deviation from the sample data.

•  $P_p$  works when there are both upper and lower specification limits.



# $C_{pk}$

---

- $C_{pk}$  stands for the capability of the process with a k factor adjustment.

$$C_{pk} = (1 - k) \times C_p$$

where

$$k = \frac{|m - \mu|}{\frac{USL - LSL}{2}} \quad m = \frac{USL + LSL}{2}$$

$\mu$  is the process mean;  $n$  is the sample size.

**USL** and **LSL** are the upper and lower specification limits.

# C<sub>pk</sub>

- The formulas to calculate C<sub>pk</sub> can also be expressed as follows:

$$C_{pk} = \min \left( \frac{USL - \mu}{3 \times \sigma_{within}}, \frac{\mu - LSL}{3 \times \sigma_{within}} \right)$$

where

$$\sigma_{within} = \frac{s_p}{c_4(d+1)}$$

$$s_p = \sqrt{\frac{\sum_i \sum_j (x_{ij} - \bar{x}_i)^2}{\sum_i (n_i - 1)}}$$

$$d = \sum_i (n_i - 1)$$

$$c_4 = \frac{4(n-1)}{(4n-3)}$$

**USL** and **LSL** are the upper and lower specification limits.



# $C_{pk}$

---

- $C_{pk}$  measures the process' actual capability by taking both the variation and average of the process into consideration.
- The process does not need to be centered between the specification limits to make the index meaningful.
- $C_{pk}$  is recommended when the process is not in the center between the specification limits.
- When there is only a one-sided limit,  $C_{pk}$  is calculated using  $C_{pu}$  or  $C_{pl}$ .

# C<sub>pk</sub>

---

- C<sub>pk</sub> for upper specification limit:

$$C_{pu} = \frac{USL - \mu}{3 \times \sigma_{within}}$$

- C<sub>pk</sub> for lower specification limit:

$$C_{pl} = \frac{\mu - LSL}{3 \times \sigma_{within}}$$

**USL** and **LSL** are the upper and lower specification limits.  
**μ** is the process mean.



# $P_{pk}$

---

- $P_{pk}$  stands for the performance of the process with a k factor adjustment.

$$P_{pk} = (1 - k) \times P_p$$

where

$$k = \frac{|m - \mu|}{\frac{USL - LSL}{2}}$$

$$m = \frac{USL + LSL}{2}$$

**USL** and **LSL** are the upper and lower specification limits.  
 **$\mu$**  is the process mean.



# $P_{pk}$

---

- The formulas to calculate  $P_{pk}$  can also be expressed as follows:

$$P_{pk} = \min\left(\frac{USL - \mu}{3 \times \sigma_{overall}}, \frac{\mu - LSL}{3 \times \sigma_{overall}}\right)$$

$$\sigma_{overall} = \frac{s}{c_4(n)}$$

$$s = \sqrt{\sum_i \sum_j \frac{(x_{ij} - \bar{x})^2}{n-1}}$$

$$c_4 = \frac{4(n-1)}{(4n-3)}$$

**USL** and **LSL** are the upper and lower specification limits.  
 **$\mu$**  is the process mean.  **$n$**  is the sample size.





# $P_{pk}$

---

- Similar to  $C_{pk}$ ,  $P_{pk}$  measures the process capability by taking both the variation and the average of the process into consideration.
- $P_{pk}$  solves the decentralization problem  $P_p$  cannot overcome.
- $C_{pk}$  considers the within-subgroup standard deviation, while  $P_{pk}$  considers the total standard deviation from the sample data.
- When there is only a one-sided specification limit,  $P_{pk}$  is calculated using  $P_{pu}$  or  $P_{pl}$ .

# $P_{pk}$

---

- $P_{pk}$  for upper specification limit:

$$P_{pu} = \frac{USL - \mu}{3 \times \sigma_{overall}}$$

- $P_{pk}$  for lower specification limit:

$$P_{pl} = \frac{\mu - LSL}{3 \times \sigma_{overall}}$$

**USL** and **LSL** are the upper and lower specification limits.



# $C_{pm}$

---

- $C_p$ ,  $P_p$ ,  $C_{pk}$ , and  $P_{pk}$  all consider the variation of the process.  $C_{pk}$  and  $P_{pk}$  take both the variation and the average of the process into consideration when measuring the process capability.
- It is possible that the process average fails to meet the target customers require while the process still remains between the specification limits.  $C_{pm}$  (Taguchi's capability index) helps to capture the variation from the specified target.

# C<sub>pm</sub>

---

- Formula to calculate C<sub>pm</sub>

$$C_{pm} = \frac{\min(T - LSL, USL - T)}{3 \times \sqrt{s^2 + (\mu - T)^2}}$$

**USL** and **LSL** are the upper and lower specification limits.  
**T** is the specified target.  
**μ** is the process mean.

*Note: C<sub>pm</sub> can work only if there is a target value specified.*





# Use Minitab to Run a Process Capability Analysis

---

- Data File: “Capability Analysis” tab in “Sample Data.xlsx”
- Steps in Minitab to run a process capability analysis:
  - 1) Click Stat → Basic Statistics → Normality Test.
  - 2) A new window named “Normality Test” pops up.
  - 3) Select “HtBk” as the variable.
  - 4) Click “OK.”
  - 5) The histogram and the normality test results appear in the new window.
  - 6) In this example, the p-value is 0.275, greater than the alpha level (0.05). We fail to reject the hypothesis and conclude that the data are normally distributed.
  - 7) Click Stat → Quality Tools → Capability Analysis → Normal.
  - 8) A new window named “Capability Analysis (Normal Distribution)” pops up.
  - 9) Select “HtBk” as the single column and enter “1” as the subgroup size.
  - 10) Enter “6” as the “Lower spec” and “7” as the “Upper spec”
  - 11) Click “Options” button and another new window named “Capability Analysis (Normal Distribution) – Options” pops up.
  - 12) Enter “6.5” as the target and click “OK.”
  - 13) Click “OK” in the “Capability Analysis (Normal Distribution)” window.
  - 14) The capability analysis results appear in the new window.



# Use Minitab to Run a Process Capability Analysis

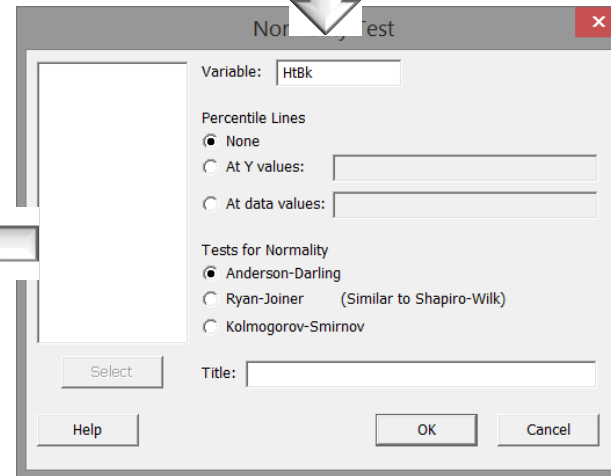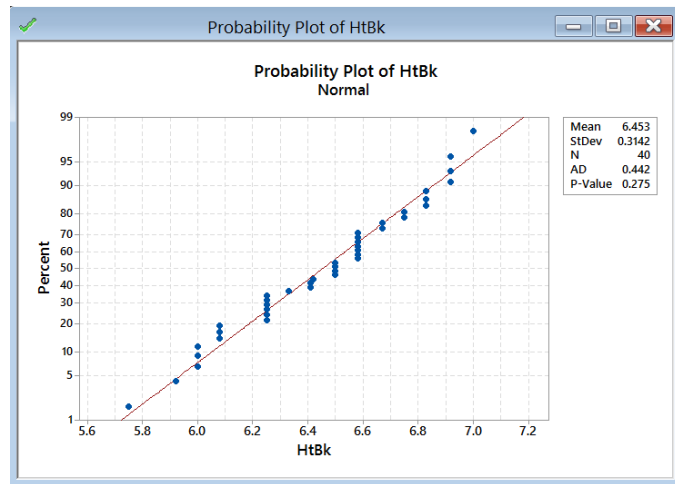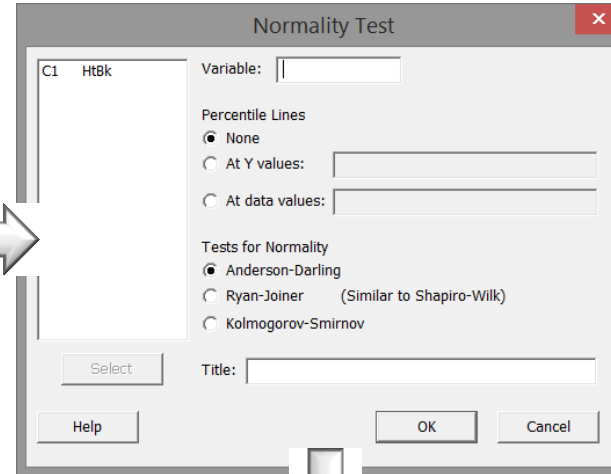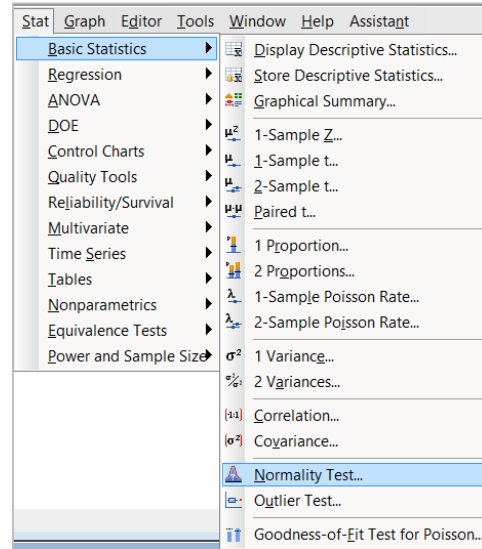


# Use Minitab to Run a Process Capability Analysis

The image illustrates the steps to run a Process Capability Analysis in Minitab:

- Menu Path:** Stat > Quality Tools > Capability Analysis > Normal...
- Capability Analysis (Normal Distribution) Dialog:** Data are arranged as  Single column: [ ] Subgroup size: [ ] (use a constant or an ID column)  Subgroups across rows of: [ ] Lower spec: [ ]  Boundary Upper spec: [ ]  Boundary Historical mean: [ ] (optional) Historical standard deviation: [ ] (optional) Buttons: Select, Help, Transform..., Estimate..., Options..., Storage..., OK, Cancel
- Capability Analysis (Normal Distribution): Options Dialog:** Target (adds Cpm to table): [ 6.1 ] Use tolerance of  $K \times \sigma$  for capability statistics  $K =$  [ 6 ] Perform Analysis:  Within subgroup analysis  Overall analysis Display:  Parts per million  Percents  Capability stats (Cp, Pp)  Benchmark Z's ( $\sigma$  level)  Include confidence intervals Confidence level: [ 95.0 ] Confidence intervals: [ Two-sided ] Title: [ ] Buttons: Help, OK, Cancel
- Capability Analysis (Normal Distribution) Dialog (Final):** C1 HtBk Data are arranged as  Single column: [ HtBk ] Subgroup size: [ 1 ] (use a constant or an ID column)  Subgroups across rows of: [ ] Lower spec: [ 6 ]  Boundary Upper spec: [ 7 ]  Boundary Historical mean: [ ] (optional) Historical standard deviation: [ ] (optional) Buttons: Select, Help, Transform..., Estimate..., Options..., Storage..., OK, Cancel



# Use Minitab to Run a Process Capability Analysis

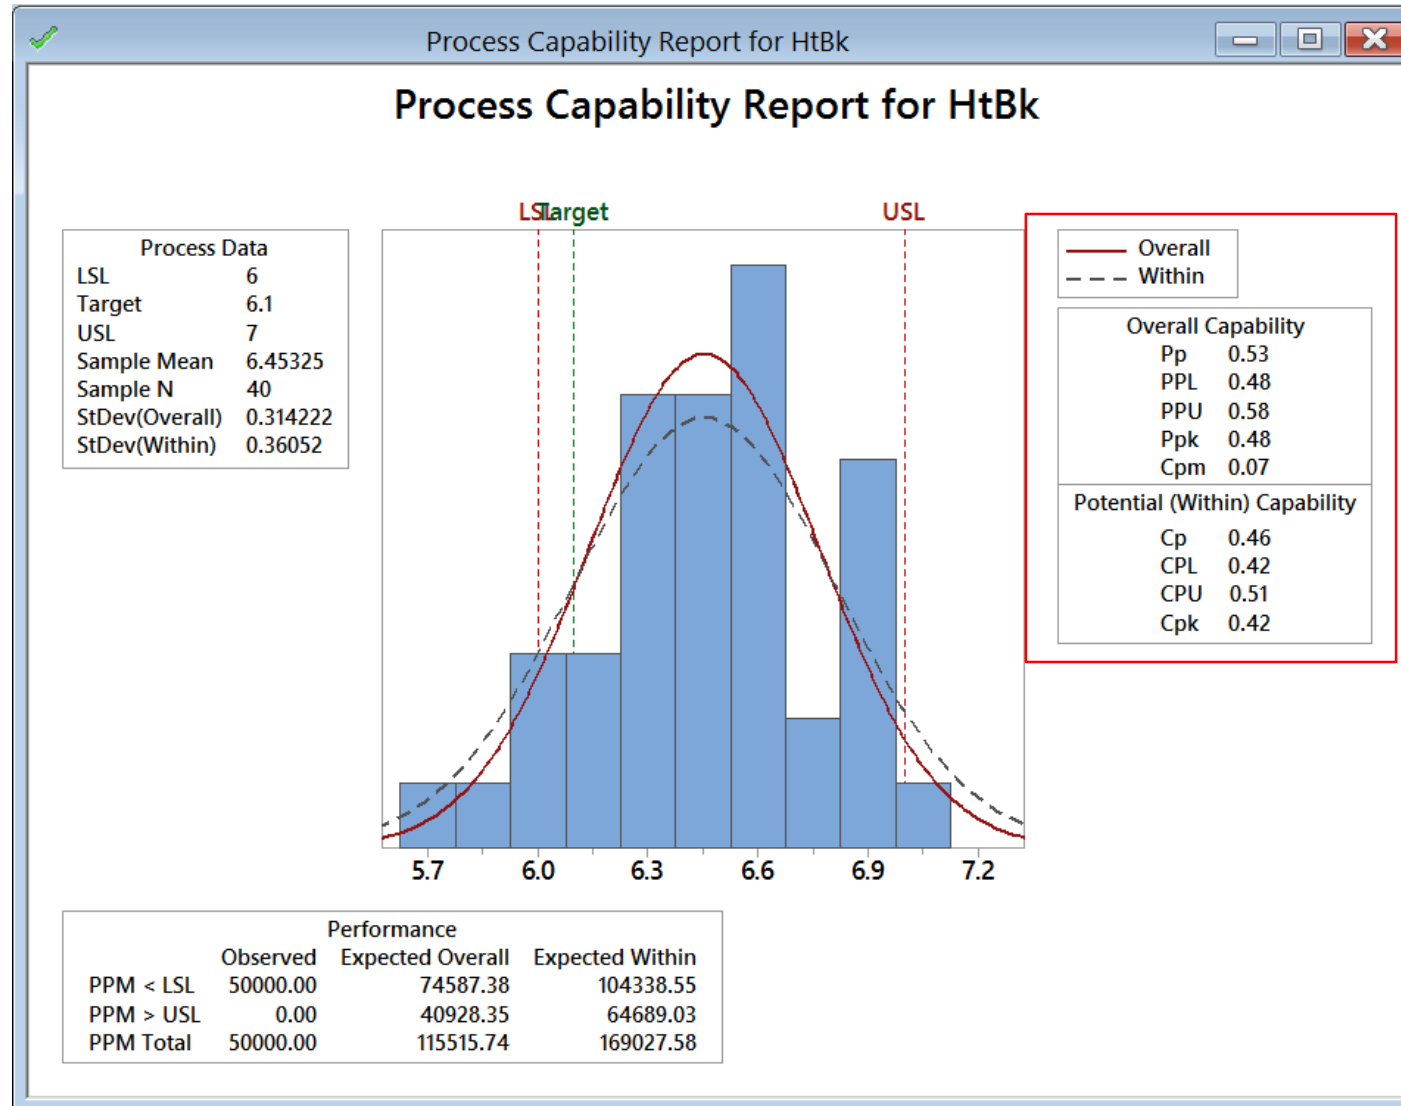




# Use Minitab to Run a Process Capability Analysis

---


- 1) If the p-value of the normality test is smaller than the alpha level (0.05), we reject the null hypothesis and conclude that the data are not normally distributed.
- 2) Click Stat → Quality Tools → Capability Analysis → Nonnormal
- 3) A new window named “Capability Analysis (Nonnormal Distribution)” pops up.
- 4) Select “HtBk” as the single column.
- 5) Enter “6” as the “Lower spec” and “7” as the “Upper spec.”
- 6) Click “Options” button and another new window named “Capability Analysis (Nonnormal Distribution) – Options” pops up.
- 7) Enter “6.5” as the target and click “OK.”
- 8) Click “OK” in the “Capability Analysis (Nonnormal Distribution)” window.
- 9) The capability analysis results appear in the new window.



# Use Minitab to Run a Process Capability Analysis

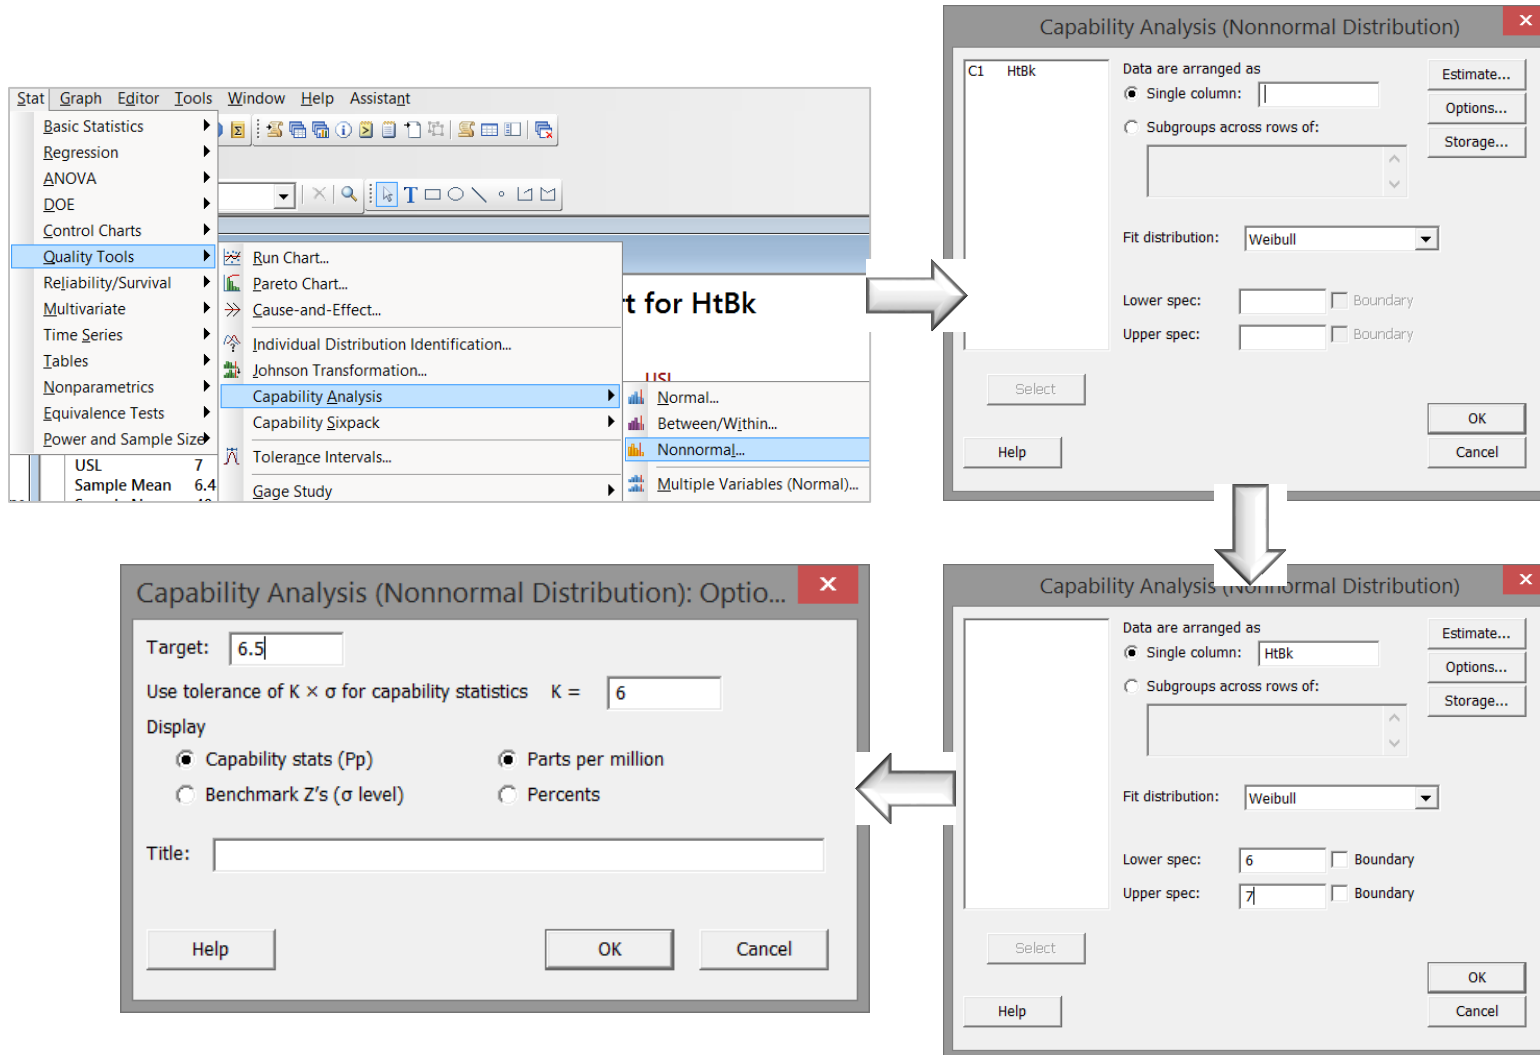

# Use Minitab to Run a Process Capability Analysis

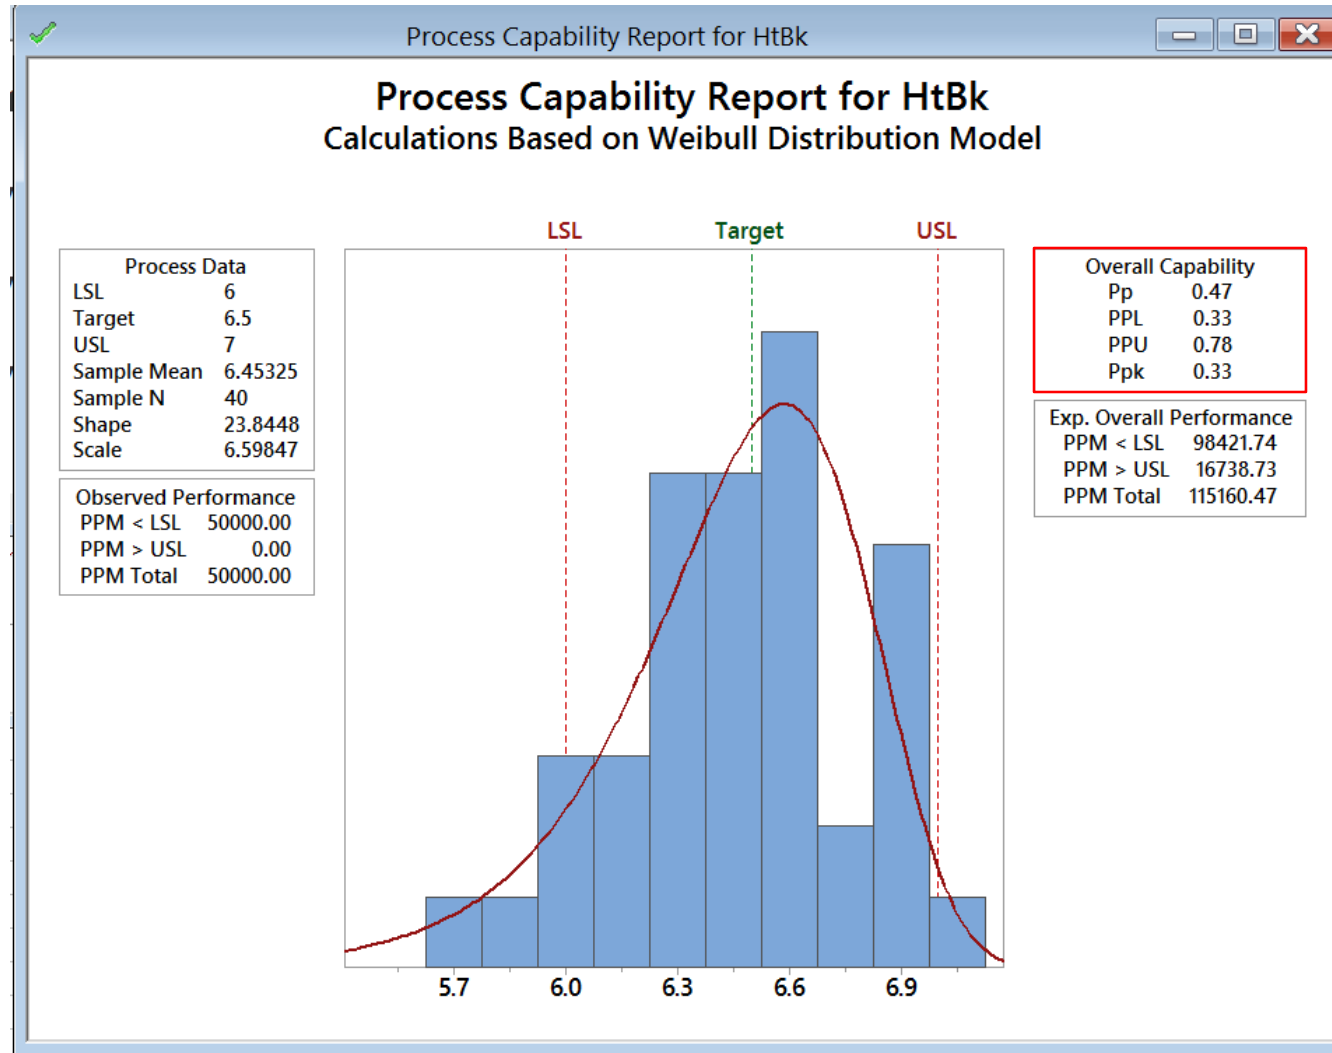

## 2.4.2 Concept of Stability



# What is Process Stability?

---

- A process is said to be stable when:
  - the process is in control
  - the future behavior of the process is predictable at least between some limits
  - there is only random variation involved in the process.
  - the causes of variation in the process are only due to chance or common causes
  - there are not any trends, patterns, or outliers in the control chart of the process.

# Root Causes of Variation in the Process

---

- **Common Cause:**

- Chance
- Random and anticipated
- Natural noise
- Inherent in the process
- Unable to be eliminated from the process.

- **Special Cause:**

- Assignable cause
- Unanticipated
- Unnatural pattern
- Signal of changes in the process
- Able to be eliminated from the process.



# Control Charts

---

- **Control charts** are the graphical tools to analyze the stability of a process.
- A control chart is used to identify the presence of potential special causes in the process and to determine whether the process is statistically in control.
- If the samples or calculations of samples are all in control, the process is stable and the data from the process can be used to predict the future performance of the process.

# Popular Control Charts

---

- I-MR Chart
- Xbar-R Chart
- Xbar-S Chart
- C Chart
- U Chart
- P Chart
- NP Chart
- EWMA Chart
- CUSUM Chart

*Note: More details of the control charts will be introduced in the Control module.*



# Process Stability vs. Process Capability

---

- Process stability indicates how stable a process performed in the past.
- When the process is stable, we can use the data from the process to predict its future behavior.
- Process capability indicates how well a process performs with respect to meeting the customer's specifications.
- The process capability analysis is valid only if the process is statistically stable (i.e. in control, predictable).
- Being stable does *not* guarantee that the process is also capable. However, being stable is the prerequisite to determine whether a process is capable.



## 2.4.3 Attribute & Discrete Capability



# Process Capability Analysis for Binomial Data

---

- If we are measuring the count of defectives in each sample set to assess the process performance of meeting the customer specifications, we use “%Defective” (percentage of items in the samples that are defective) as the process capability index.

$$\% \text{Defective} = \frac{N_{\text{defectives}}}{N_{\text{overall}}}$$

where  $N_{\text{defectives}}$  is the total count of defectives in the samples and  $N_{\text{overall}}$  is the sum of all the sample sizes.

# Process Capability Analysis for Poisson Data

---

- If we are measuring the count of defects in each sample set to assess the process performance of meeting the customer specifications, we use Mean DPU (defects per unit of measurement) as the process capability index.

$$DPU = \frac{N_{defects}}{N_{overall}}$$

where  $N_{defects}$  is the total count of defects in the samples and  $N_{overall}$  is the sum of all the units in the samples.

## 2.4.4 Monitoring Techniques



# Capability and Monitoring

---

- In the Measure phase of the project, process stability analysis and process capability analysis are used to baseline the performance of current process.
- In the Control phase of the project, process stability analysis and process capability analysis are combined to monitor whether the improved process is maintained consistently as expected.



# 3.0 Control Phase



# Yellow Belt Training: Control Phase

---

## 3.1 Lean Controls

3.1.1 Control Methods for 5S

3.1.2 Kanban

3.1.3 Poka-Yoke (Mistake Proofing)

## 3.2 Six Sigma Control Plans

3.2.1 Cost Benefit Analysis

3.2.2 Elements of the Control Plan

3.2.3 Elements of the Response Plan





# 3.1 Lean Controls



# Yellow Belt Training: Control Phase

---

## 3.1 Lean Controls

3.1.1 Control Methods for 5S

3.1.2 Kanban

3.1.3 Poka-Yoke (Mistake Proofing)

## 3.2 Six Sigma Control Plans

3.2.1 Cost Benefit Analysis

3.2.2 Elements of the Control Plan

3.2.3 Elements of the Response Plan



# 3.1.1 Control Methods for 5S



# What is 5S?

---

- 5S is a systematic method to organize, order, clean, and standardize a workplace...and keep it that way!
  - 5S is a methodology of organizing and improving the work environment.
- 5S is summarized in five Japanese words, all starting with the letter S:
  - **Seiri** (sorting)
  - **Seiton** (straightening)
  - **Seiso** (shining)
  - **Seiketsu** (standardizing)
  - **Shisuke** (sustaining).
- 5S was originally developed in Japan, and is widely used to optimize the workplace to increase productivity and efficiency.



# 5S Goals

---

- Reduced waste
- Reduced cost
- Establish a work environment that is:
  - self-explaining
  - self-ordering
  - self-regulating
  - self improving.
  - Where there is/are **no more**:
    - Wandering and/or searching
    - Waiting or delays
    - Secrets hiding spots for tools
    - Obstacles or detours
    - Extra pieces, parts, materials, etc.
    - Injuries
    - Waste.



# 5S Benefits

---

- Reduced changeovers
- Reduced defects
- Reduced waste
- Reduced delays
- Reduced injuries
- Reduced breakdowns
- Reduced complaints
- Reduced red ink
- Higher quality
- Lower costs
- Safer work environment
- Greater associate and equipment capacity



# 5S Systems Reported Results

---

- Cut in floor space: 60%
- Cut in flow distance: 80%
- Cut in accidents: 70%
- Cut in rack storage: 68%
- Cut in number of forklifts: 45%
- Cut in machine changeover time: 62%
- Cut in annual physical inventory time: 50%
- Cut in classroom training requirements: 55%
- Cut in nonconformance in assembly: 96%
- Increase in test yields: 50%
- Late deliveries: 0%
- Increase in throughput: 15%



# Sorting (Seiri)

---



- Go through all tools, parts, equipment, supply, and materials in the workplace.
- Categorize into two major groups: needed and unneeded.
- Eliminate unneeded items from the workplace. Dispose of or recycle those items.
- Keep need items and sort in order of priority. **When in doubt...throw it out!**



# Straightening (Seiton)

---



- **Straightening** in 5S is also called **setting in order**.
  - Label each needed item.
  - Store items at their best locations so that the workers can find them easily whenever they needed any item.
  - Reduce the motion and time required to locate and obtain any item whenever it is needed.
  - Promote an efficient work flow path.
  - Use visual aids like the tool board image on this page.

# Shining (Seiso)

---



- **Shining** in 5S is also called **sweeping**.
- Clean the workplace thoroughly.
- Maintain the tidiness of the workplace.
- Make sure every item is located at the specific location where it should be.
- Create the ownership in the team to keep the work area clean and organized.

# Standardizing (Seiketsu )

---

- **Standardize** the workstation and the layout of tools, equipment, and parts.
- Create identical workstations with a consistent way of storing the items at their specific locations so that workers can be moved around to any workstation any time and perform the same task.



# Sustaining (Shisuke)

---

- **Sustaining** in 5S is also called **self-discipline**.
- Create the culture in the team to follow the first four S's consistently.
- Avoid falling back to the old ways of cluttered and unorganized work environment.
- Keep the momentum of optimizing the workplace.
- Promote innovations of workplace improvement.
- Sustain the first four S's using:
  - 5S Maps
  - 5S Schedules
  - 5S Job cycle charts
  - Integration of regular work duties
  - 5S Blitz schedules
- Daily workplace scans.



# Simplified Summary of 5S

---

- **Sort** – “when in doubt, move it out.”
- **Set in Order** – Organize all necessary tools, parts, and components of production. Use visual ordering techniques wherever possible.
- **Shine** – Clean machines and/or work areas. Set regular cleaning schedules and responsibilities.
- **Standardize** – Solidify previous three steps, make 5S a regular part of the work environment and everyday life.
- **Sustain** – Audit, manage, and comply with established five-s guidelines for your business or facility



## 3.1.2 Kanban



# What is Kanban?

---

- The Japanese word “Kanban” means “signboard.”
- **Kanban system** is a “pull” production scheduling system to determine when to produce, what to produce, and how much to produce based on the demand.
- It was originally developed by Taiichi Ohno in order to reduce the waste in inventory and increase the speed of responding to the immediate demand.

# Kanban System

---

- Kanban system is a demand-driven system.
- The customer demand is the signal to trigger or pull the production.
- Products are made only to meet the immediate demand. When there is no demand, there is no production.
- It is designed to minimize the in-process inventory and to have the right material with the right amount at the right location at the right time.





# Kanban System

---

- Principles of the Kanban System:
  - Only produce products with exactly the same amount that customers consume.
  - Only produce products when customers consume.
- The production is driven by the *actual* demand from the customer side instead of the *forecasted* demand planned by the staff.



# Kanban Card

---

- The **Kanban card** is the ticket or signal to authorize the production or movement of materials. It is the message of asking for more.
- It is sent from the end customer up to the chain of production.
- Upon receiving of a Kanban card, the production station would start to produce goods.
- The Kanban card can be a physical card or an electronic signal.

# Kanban System Example

---

- The simplest example of a Kanban system is the supermarket operation.
- Customers visit the supermarkets and buy what they need.
- The checkout scanners send electronic Kanban cards to the local warehouse asking for more when the items are sold to customers.
- When the warehouse receives the Kanban cards, it starts to replenish the exact goods being sold.
- If the warehouse prepares more than what Kanban cards require, the goods would become obsolete. If it prepares less, the supermarket would not have the goods available when customers need them.



# Kanban System Benefits

---

- Minimize in-process inventory
- Free up space occupied by unnecessary inventory
- Prevent overproduction
- Improve responsiveness to dynamic demand
- Avoid the risk of inaccurate demand forecast
- Streamline the production flow
- Visualize the work flow.



## 3.1.3 Poka-Yoke



# What is Poka-Yoke?

---

- The Japanese term “poka-yoke” means “mistake-proofing.”
- It is a mechanism to eliminate defects as early as possible in the process.
- It was originally developed by Shigeo Shingo and was initially called “baka-yoke” (fool-proofing).



# Two Types of Poka-Yoke

---

- Prevention
  - Preventing defects from occurring
  - Removing the possibility that an error could occur
  - Making the occurrence of an error impossible.
- Detection
  - Detecting defects once they occur
  - Highlighting defects to draw workers' attention immediately
  - Correcting defects so that they would not reach the next stage.



# Three Methods of Poka-Yoke

---

- Contact Method
  - Use of shape, color, size, or any other physical attributes of the items.
- Constant Number Method
  - Use of a fixed number to make sure a certain number of motions are completed.
- Sequence Method
  - Use of a checklist to make sure all the prescribed process steps are followed in the right order.



# Poka-Yoke Devices

---

- We are surrounded by poka-yoke devices daily.
  - Prevention Devices
    - Example: the dishwasher does not start to run when the door is open.
  - Detection Devices
    - Example: the car starts to beep when the passengers do not buckle their seatbelts.
- Poka-yoke devices can be in any format that can quickly and effectively prevent or detect mistakes.
  - Visual, electrical, mechanical, procedural, human etc.

# Steps to Apply Poka-Yoke

---

- Step 1: Identify the process steps in need of mistake proofing.
- Step 2: Use the 5-why's method to analyze the possible mistakes or failures for the process step.
- Step 3: Determine the type of poka-yoke: prevention or detection.
- Step 4: Determine the method of poka-yoke: contact, constant number, or sequence.
- Step 5: Pilot the poka-yoke approach and make any adjustments if needed.
- Step 6: Implement poka-yoke in the operating process and maintain the performance.



# Yellow Belt Training: Control Phase

---

## 3.1 Lean Controls

3.1.1 Control Methods for 5S

3.1.2 Kanban

3.1.3 Poka-Yoke (Mistake Proofing)

## 3.2 Six Sigma Control Plans

3.2.1 Cost Benefit Analysis

3.2.2 Elements of the Control Plan

3.2.3 Elements of the Response Plan



## 3.2 Six Sigma Control Plans



## 3.2.1 Cost Benefit Analysis



# What is Cost-Benefit Analysis?

---

- The **cost-benefit analysis** is a systematic method to assess and compare the financial costs and benefits of multiple scenarios in order to make sound economic decisions.
- A cost-benefit analysis is recommended to be done at the beginning of the project based on estimations of the experts from the finance team in order to determine whether the project is financially feasible.
- It is recommended to update the cost-benefit analysis at each DMAIC phase of the project.



# Why Cost-Benefit Analysis?

---

- In the Define phase of the project, the cost-benefit analysis helps us understand the financial feasibility of the project.
- In the middle phases of the project, updating and reviewing the cost-benefit analysis helps us compare potential solutions and make robust data-driven decisions.
- In the Control phase of the project, the cost-benefit analysis helps us track the project's profitability.



# Return on Investment

---

- **Return on investment** (also called ROI, rate of return, or ROR) is the ratio of the net financial benefits (either gain or loss) of a project or investment to the financial costs.

$$ROI = \frac{TotalNetBenefits}{TotalCosts} \times 100\%$$

where

$$TotalNetBenefits = TotalBenefits - TotalCosts$$



# Return on Investment (ROI)

---

- The return on investment is used to evaluate the financial feasibility and profitability of a project or investment.
  - If  $ROI < 0$ , the investment is not financially viable.
  - If  $ROI = 0$ , the investment has neither gain nor loss.
  - If  $ROI > 0$ , the investment has financial gains.
- The higher the ROI, the more profitable the project.



# Net Present Value (NPV)

---

- The **net present value** (also called NPV, net present worth, or NPW) is the total present value of the cash flows calculated using a discount rate.

$$NPV = \frac{NetCashFlow_t}{(1+r)^t}$$

Where

$NetCashFlow_t$  is the net cash flow happening at time  $t$ ;  
 $r$  is the discount rate;  
 $t$  is the time of the cash flow.

# Cost Estimation

---

- Examples of costs triggered by the project:
  - Administration
  - Asset
  - Equipment
  - Material
  - Delivery
  - Real estate
  - Labor
  - Training
  - Consulting.



# Benefits Estimation

---

- Examples of benefits generated by the project:
  - Direct revenue increase
  - Waste reduction
  - Operation cost reduction
  - Quality and productivity improvement
  - Market share increase
  - Cost avoidance
  - Customer satisfaction improvement
  - Associate satisfaction improvement.



# Challenges in Cost and Benefit Estimation

---

- Different analysts might come up with different cost and benefit estimations due to their subjectivity in determining:
  - The discount rate
  - The time length of the project and its impact
  - Potential costs of the project
  - The tangible/intangible benefits of the project
  - The specific contribution of the project to the relevant financial gains/loss.



## 3.2.2 Elements of Control Plans



# Control Plans

---

- The **control plans** ensure that the changes introduced by a Six Sigma project are sustained over time.
- Benefits of the Control phase:
  - Methodical roll-out of changes including standardization of processes and work procedures
  - Ensure compliance with changes through methods like auditing and corrective actions
  - Transfer solutions and learning across the enterprise
  - Plan and communicate standardized work procedures
  - Coordinate ongoing team and individual involvement
  - Standardize data collection and procedures
  - Measure process performance, stability, and capability
  - Plan actions that mitigate possible out-of-control conditions
- Sustain changes over time.



# What is a Control Plan?

---

- A **control plan** is a management planning tool to identify, describe, and monitor the process performance metrics in order to meet the customer specifications steadily.
- It proposes the plan of monitoring the stability and capability of inputs and outputs of critical process steps in the Control phase of a project.
- It covers the data collection plan of gathering the process performance measurements.
- Control plans are the most overlooked element of most projects. It is critical that a good solution be solidified with a great control plan!





# Control Plan Elements

---

- Control Plan
  - The clear and concise summary document that details key process steps, CTQs metrics, measurements, and corrective actions.
- Standard Operating Procedures (SOPs)
  - Supporting documentation showing the “who does what, when, and how” in completing the tasks.
- Communication Plan
  - Document outlining messages to be delivered and the target audience.
- Training Plan
  - Document outlining the necessary training for employees to successfully perform new processes and procedures.
- Audit Checklists
  - Document that provides auditors with the audit questions they need to ask.
- Corrective Actions
  - Activities that need to be conducted when an audit fails.



# Control Plan

---

- The control plan identifies critical process steps that have significant impact on the products or services and the appropriate controls mechanisms.
- The control plan includes measurement systems that monitor and help manage key process step performance.
- Specified limits and targets of the performance metrics are clearly defined and communicated.
- Sampling plans to collect the measurements are declared:
  - How many samples are needed?
  - How often do we need to sample?


Where should we sample?



# Control Plan

Key processes and process steps are identified

Critical information regarding key measurements is documented and clarified

 **Lean Sigma Corporation Control Plan**

Process: \_\_\_\_\_ Preparer: \_\_\_\_\_ Page: \_\_\_\_\_ of \_\_\_\_\_  
 Customer: \_\_\_\_\_ Email: \_\_\_\_\_ Reference No: \_\_\_\_\_  
 Stakeholder: \_\_\_\_\_ Phone: \_\_\_\_\_ Revision Date: \_\_\_\_\_  
 Business: \_\_\_\_\_ Owner: \_\_\_\_\_ Approval: \_\_\_\_\_

Process	Process Step	CTQ/Metric	CTQ / Metric Equation	Specification/ Requirement		Measurement Method	Sample Size	Measure Frequency	Responsible for Metric	Link or Report Name	Corrective Action	Responsible for Action
				LSL	USL							

©Copyright Lean Sigma Corporation 2013



# Control Plan

Measurements are clearly defined with equations

Other key measurement information is documented: sample size, measurement frequency, people responsible for the measurement, etc.

Customer specifications are declared



## Lean Sigma Corporation Control Plan

Process: _____	Preparer: _____	Page: _____ of _____
Customer: _____	Email: _____	Reference No: _____
Stakeholder: _____	Phone: _____	Revision Date: _____
Business: _____	Owner: _____	Approval: _____

Process	Process Step	CTQ/Metric	CTQ / Metric Equation	Specification/ Requirement		Measurement Method	Sample Size	Measure Frequency	Responsible for Metric	Link or Report Name	Corrective Action	Responsible for Action
				LSL	USL							

©Copyright Lean Sigma Corporation 2013



# Control Plan

Where will this measurement or report be found? Good control plans provide linking information or other report reference information.

Control plans identify the mitigating action or corrective actions required in the event the measurement falls out of spec or control. Responsible parties are also declared.



## Lean Sigma Corporation Control Plan

Process: _____		Preparer: _____		Page: _____ of _____	
Customer: _____		Email: _____		Reference No: _____	
Stakeholder: _____		Phone: _____		Revision Date: _____	
Business: _____		Owner: _____		Approval: _____	

Process	Process Step	CTQ/Metric	CTQ / Metric Equation	Specification/ Requirement		Measurement Method	Sample Size	Measure Frequency	Responsible for Metric	Link or Report Name	Corrective Action	Responsible for Action
				LSL	USL							

©Copyright Lean Sigma Corporation 2013



# Control Plan Example



## Lean Sigma Corporation Control Plan

Process: _____	Preparer: _____	Page: _____ of _____
Customer: _____	Email: _____	Reference No: _____
Stakeholder: _____	Phone: _____	Revision Date: _____
Business: _____	Owner: _____	Approval: _____

Process	Process Step	CTQ/Metric	CTQ / Metric Equation	Specification/ Requirement		Measurement Method	Sample Size	Measure Frequency	Responsible for Metric	Link or Report Name	Corrective Action	Responsible for Action
				LSL	USL							

©Copyright Lean Sigma Corporation 2013



# Standard Operating Procedures (SOPs)

---

- **Standard Operating Procedures (SOPs)** are documents that focus on process steps, activities, and specific tasks required to complete an operation.
- SOPs should not be much more than two to four pages.
- SOPs should be written to the user's level of required detail and information.
  - The level of detail is dependent on the position's required skills and training
- Good SOPs are auditable, easy to follow, and not difficult to find.
  - Auditable characteristics are: observable actions and countable frequencies. Results should be evident to a third party (*compliance to the SOP must be measurable*).



# SOP Elements

---

- SOPs are intended to impart high value information in concise and well-documented manner.
- SOP Title and Version Number:
  - Provide a title and unique identification number with version information.
- Date:
  - List the original creation date; add all revision dates.
- Purpose:
  - State the reason for the SOP and what it intends to accomplish.
- Scope:
  - Identify all functions, jobs, positions, and/or processes governed or affected by the SOP.



# SOP Elements

---

- Responsibilities:
  - Identify job functions and positions (not people) responsible for carrying out activities listed in the SOP.
- Materials:
  - List all material inputs: parts, files, data, information, instruments, etc.
- Process Map:
  - Show high level or level two to three process maps or other graphical representations of operating steps.
- Process Metrics:
  - Declare all process metrics and targets or specifications.
- Procedures:
  - List actual steps required to perform the function.
- References:
  - List any documents that support the SOP.



# SOP Template

## Standard Operating Procedure Template

SOP Name/Title:		
Document Storage Location/Source:		Document No:
SOP Originator:	Approving Position:	Effective Date:
Name:	Name:	Last Edited Date:
Signature:	Signature:	Other:

1. Purpose
2. Scope
3. Responsibilities
4. Materials
5. Related Documents
6. Definitions
7. Process Map



### 8. Procedures

Step	Action	Responsible
1		
2		
3		

9. Process Metrics
10. Resources




# Communication Plans

---

- **Communication plans** are documents that focus on planning and preparing for the dissemination of information.
- Communication plans organize messages and ensure that the proper audiences receive the correct message at the right time.
- A good communication plan identifies:
  - Audience
  - Key points/message
  - Medium (how the message is to be delivered)
  - Delivery schedule
  - Messenger
  - Dependencies and escalation points
  - Follow-up messages and delivery mediums.
- Communication plans help develop and execute strategies for delivering changes to an organization.



# Communication Plan Template

 <b>Communication Plan Template</b>									
<u>Process/Function Name</u>		<u>Project/Program Name</u>		<u>Project Lead</u>		<u>Project Sponsor/Champion</u>			
<b>Communication Purpose:</b>									
Target Audience	Key Message	Message Dependencies	Delivery Date	Location	Medium	Follow up Medium	Messenger	Escalation Path	Contact Information

©Copyright Lean Sigma Corporation 2013




# Training Plans

---

- **Training plans** are used to manage the delivery of training for new processes and procedures.
- Most GB or BB projects will require changes to processes and/or procedures that must be executed or followed by various employees.
- Training plans should incorporate all SOPs related to performing new or modified tasks.
- Training plans use and support existing SOPs and do not supersede them.
- Training plans should include logistics:
  - One-on-one or classroom
  - Instruction time
  - Location of training materials
  - Master training reference materials
  - Instructors and intended audience
  - Trainee names.



# Training Plan Template

 **LEAN SIGMA CORPORATION**

## Training Plan Template

Project		Process		Project Lead		Business Division			Sponsor	
Who	Where	When	How Many	Key Change/Process	Training Medium	Supporting Docs	Technology Requirements	Other Requirements	Trainer	Status

©Copyright Lean Sigma Corporation 2013



# Audits

---

- What is an **audit**?
  - ISO 9000 defines an Audit as “a systematic and independent examination to determine whether quality activities and related results comply with planned arrangements and whether these arrangements are implemented effectively and are suitable to achieve objectives.”
- Audits are used to ensure actions, processes, procedures, and other tasks are performed as expected.



# Audit Guidelines

---

- Audits should be directed by managers, supervisors, and other accountable positions.
- An audit's purpose must be well-defined and executed by independent unbiased personnel.
- Auditors must:
  - Be qualified to perform their tasks
  - Attend and successfully complete an internal auditing training session
  - Be able to identify whether or not activities are being followed according to the defined SOP
  - Base conclusions on facts and objective evidence
  - Use a well documented audit checklist.
- Audits should confirm compliance or declare non-compliance.





# Audit Checklists

---

- Auditors should review the SOPs before preparing checklists or ensure that existing checklists properly reference SOPs.
- Audit checklists:
  - Serve as guides for identifying items to be examined
  - Are used in conjunction with understanding of the procedure
  - Ensure a well-defined audit scope
  - Identify needed facts during audits
  - Provide places to record gathered facts.
- Checklists should include:
  - A review of training records
  - A review of maintenance records
  - Questions or observations that focus on expected behaviors
  - Questions should be open-ended where possible
  - Definitive observations yes/no, true/false, present/absent, etc.



# Audit Checklist Template



## Audit Checklist

Target Area:	Statement of Audit Objective:	Auditor:	Audit Date:
Audit Technique	Auditable Item, Observation, Procedure etc.	Individual Auditor Rating (Circle Rating)	
Observation	Have all associates been trained?	YES	NO
Observation	Is training documentation available?	YES	NO
Observation	Is training documentation current?	YES	NO
Observation	Are associates wearing proper safety gear?	YES	NO
Observation	Are SOP's available?	YES	NO
Observation	Are SOP's current?	YES	NO
Observation	Is quality being measured	YES	NO
Observation	Is sampling being conducted in random fashion	YES	NO
Observation	Is sampling meeting it's sample size target?	YES	NO
Observation	Are control charts in control	YES	NO
Observation	Are control charts current?	YES	NO
Observation	Is the process capability index >1.0?	YES	NO
Number of Out of Compliance Observations			
Total Observations			
Audit Yield			#DIV/0!
Corrective Actions Required			
Auditor Comments			



## 3.2.3 Response Plan Elements



# What is a Response Plan?

---

- A **response plan** should be a component of as many control plan elements as possible.
- Response plans are a management planning tool to describe corrective actions necessary in the event of out-of-control situations.
- There is never any guarantee that processes will always perform as designed. Therefore, it is wise to prepare for occasions when special causes are present.
- Response plans help us mitigate risks and, as already mentioned, should be part of several control plan elements.



# Response Plan Elements

---

- Action triggers
  - When do we need to take actions to correct a problem or issue?
- Action recommendation
  - What activities are required in order to solve the problem in the process? The action recommended can be short-term (quick fix) or long-term (true process improvement).
- Action respondent
  - Who is responsible for taking actions?
- Action date
  - When did the actions happen?
- Action results
  - What actions have been taken?
  - When were actions taken?
  - What are the outcomes of the actions taken?



# Response Plan Elements



## Lean Sigma Corporation Control Plan

Process: _____	Preparer: _____	Page: _____ of _____
Customer: _____	Email: _____	Reference No: _____
Stakeholder: _____	Phone: _____	Revision Date: _____
Business: _____	Owner: _____	Approval: _____

Process	Process Step	CTQ/Metric	CTQ / Metric Equation	Specification/ Requirement		Measurement Method	Sample Size	Measure Frequency	Responsible for Metric	Link or Report Name	Corrective Action	Responsible for Action
				LSL	USL							

©Copyright Lean Sigma Corporation 2013

Note the response plan element in this control plan template



# Response Plan Elements

**LEAN SIGMA CORPORATION** **Communication Plan Template**

<u>Process/Function Name</u>		<u>Project/Program Name</u>		<u>Project Lead</u>		<u>Project Sponsor/Champion</u>			
Communication Purpose:									
Target Audience	Key Message	Message Dependencies	Delivery Date	Location	Medium	Follow up Medium	Messenger	Escalation Path	Contact Information

©Copyright Lean Sigma Corporation 2013



Note the response plan element in this communication plan template



# Response Plan Elements



## Audit Checklist

Target Area:	Statement of Audit Objective:	Auditor:	Audit Date:
Audit Technique	Auditable Item, Observation, Procedure etc.	Individual Auditor Rating (Circle Rating)	
Observation	Have all associates been trained?	YES	NO
Observation	Is training documentation available?	YES	NO
Observation	Is training documentation current?	YES	NO
Observation	Are associates wearing proper safety gear?	YES	NO
Observation	Are SOP's available?	YES	NO
Observation	Are SOP's current?	YES	NO
Observation	Is quality being measured	YES	NO
Observation	Is sampling being conducted in random fashion	YES	NO
Observation	Is sampling meeting it's sample size target?	YES	NO
Observation	Are control charts in control	YES	NO
Observation	Are control charts current?	YES	NO
Observation	Is the process capability index >1.0?	YES	NO
Number of Out of Compliance Observations			
Total Observations			
Audit Yield			#DIV/0!
Corrective Actions Required			
<b>Auditor Comments</b>			

Note the response plan element in this audit checklist







# LEAN SIGMA EXPERTS --- AUSTRALIA



Lean Six Sigma Yellow Belt Training  
Featuring Examples from Minitab 17

